Myka 45 Wet - Installation Instructions

Model MK45W-XX

Please read all instructions prior to installation and keep for future reference!


1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR WET LOCATIONS.
5. CABINET, UNDER-CABINET OR SURFACE MOUNT.
6. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.
7. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS

c UL us LISTED

REV0.3
04242026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Myka 45 Wet

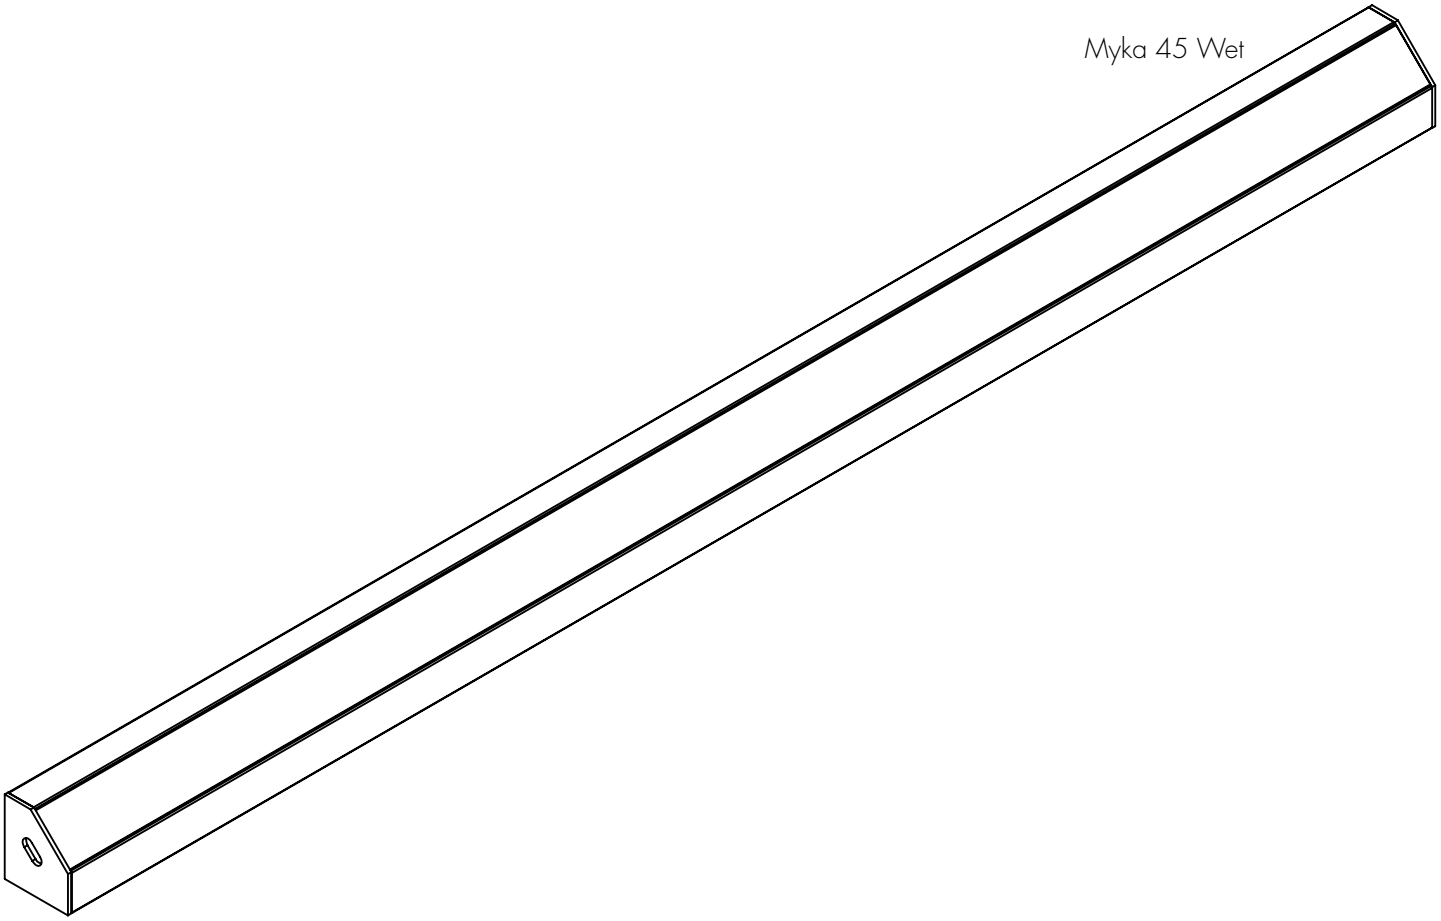

Myka 45 Wet - Installation Instructions

Model MK45W-XX


Please read all instructions prior to installation and keep for future reference!


1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR WET LOCATIONS.
5. CABINET, UNDER-CABINET OR SURFACE MOUNT.
6. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.
7. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS

REV0.3
04242026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

1

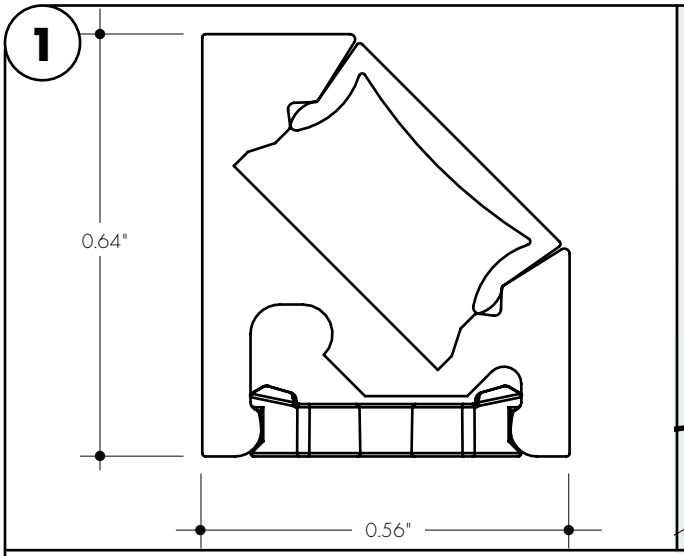


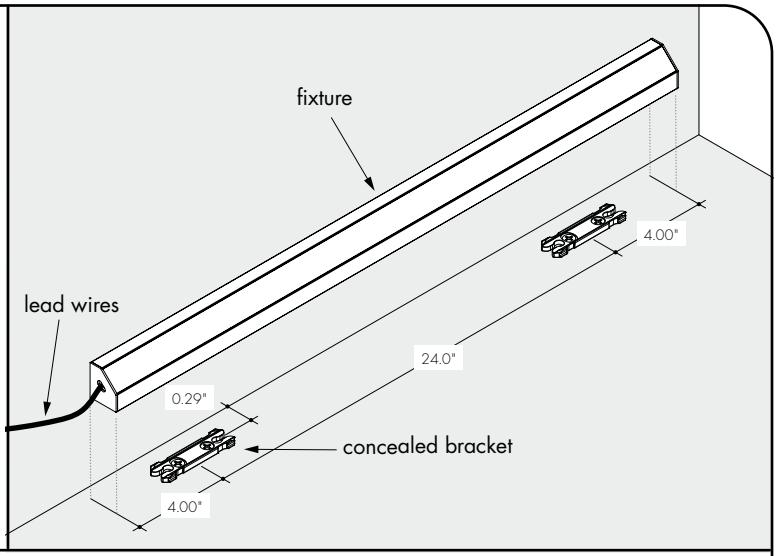

1.1 Determine the location of where the fixture(s) will be installed. Lay the fixture(s) on the surface, and make any necessary reference marks for the concealed bracket. Make marks 4" from each end of the fixture(s) and also every 24" in between. Use the fixture profile and mounting bracket detail, for any additional details.

1.2 Lay the concealed bracket onto the reference mark points and secure using the provided hardware.

2

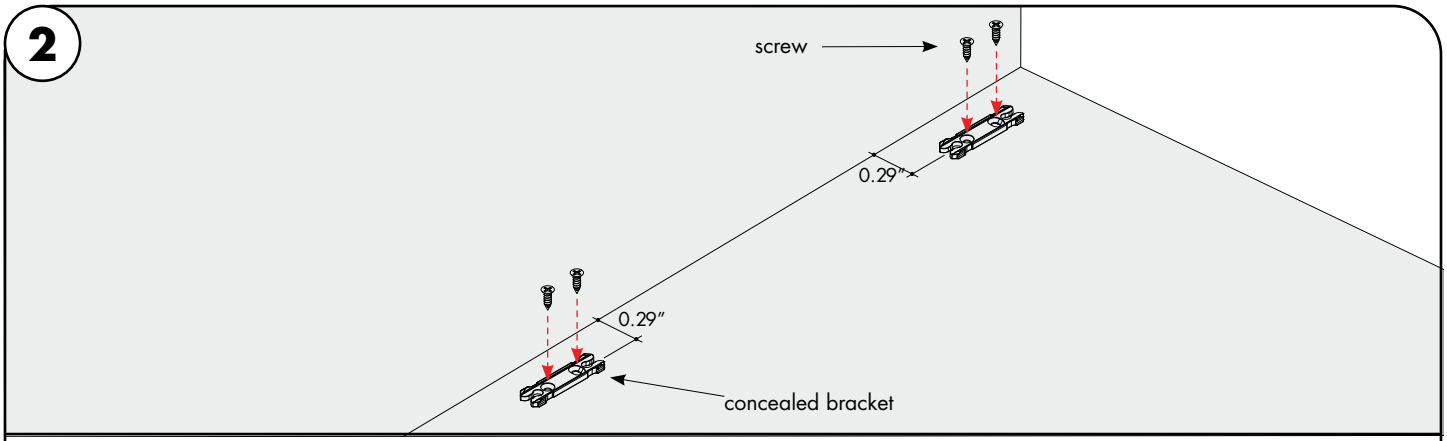

2.1 Align the mounting brackets to the marks, followed by securing each mounting bracket with 2 screws. Snap the extrusion into the mounting brackets.

2.2 To remove the extrusion from the mounting brackets, carefully insert a flat screwdriver to the bottom edge of the extrusion then pull up until the extrusion pops up.


*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR WET LOCATIONS.
5. CABINET, UNDER-CABINET OR SURFACE MOUNT.
6. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.
7. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

3

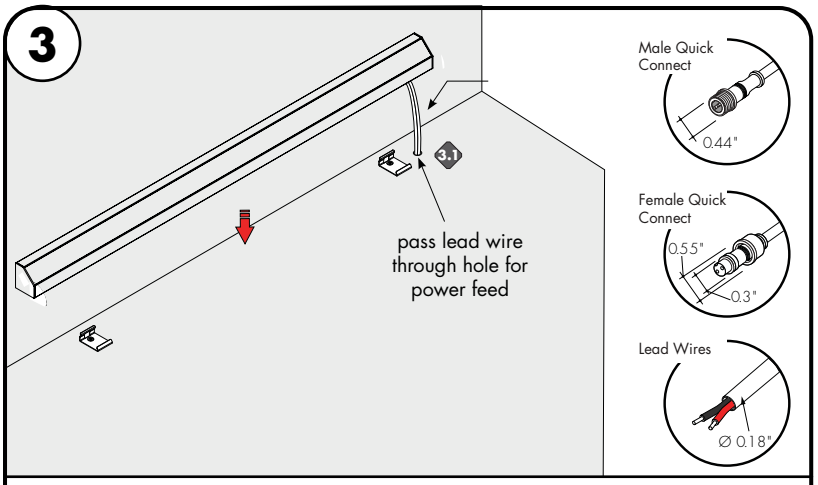


3.1 If necessary make any pass through holes for wire lead/connector to the surface, depending on the power feed option. Then snap the fixture into the concealed mounting bracket to secure in place.

4


4.1 Follow one of the two options to connect the fixture to the power supply.

Option 1 Secure female quick connect to male quick connect. Feed male quick connect wire through conduit to power supply.

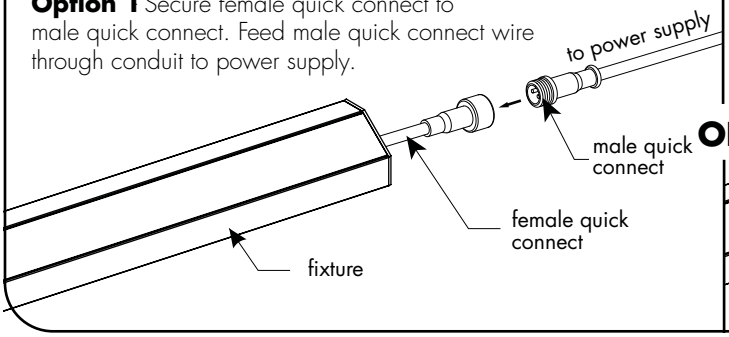


OR

Option 2 Feed wire leads to the power supply.

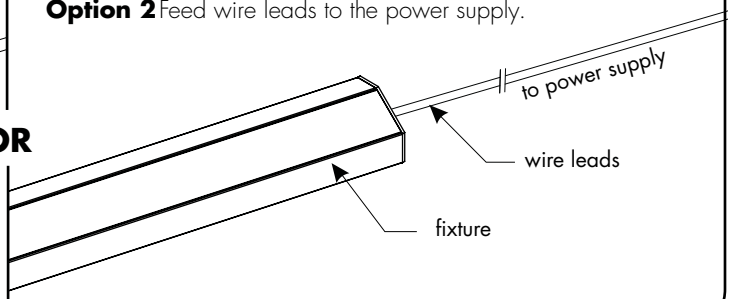

5

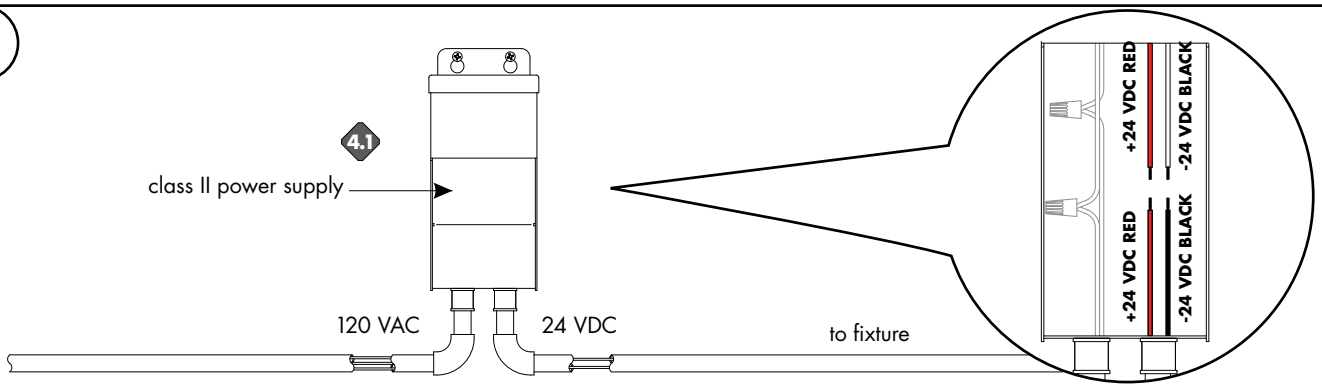

5.1 Connect +24 VDC red wire from the fixture to the power supplies +24 VDC red wire using a wire nut. Then connect the -24 VDC black wire from the fixture to the power supplies -24 VDC black wire using a wire nut.

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR WET LOCATIONS.
5. CABINET, UNDER-CABINET OR SURFACE MOUNT.
6. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.
7. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Power Supply Wiring Diagram

Note: *Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instructions for additional information.*

Static White
Wiring Diagram PDF

Myka 45 Wet - Installation Instructions

Model MK45W-XX

Please read all instructions prior to installation and keep for future reference!


1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR WET LOCATIONS.
5. CABINET, UNDER-CABINET OR SURFACE MOUNT.
6. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.
7. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS

c UL us LISTED


REV0.3
04242026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com


power supplies at the end of the run

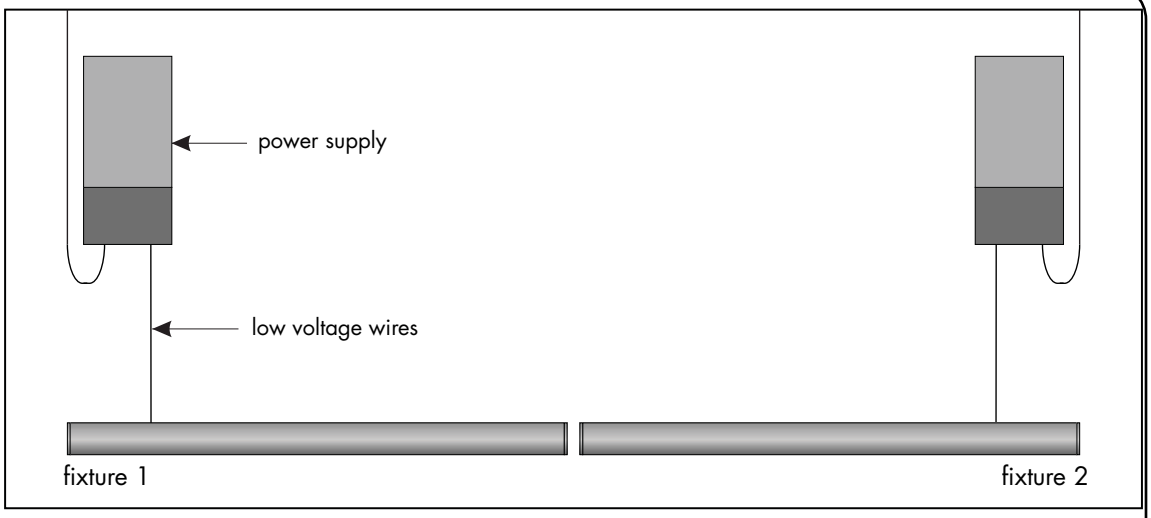

power supplies in the middle of the run

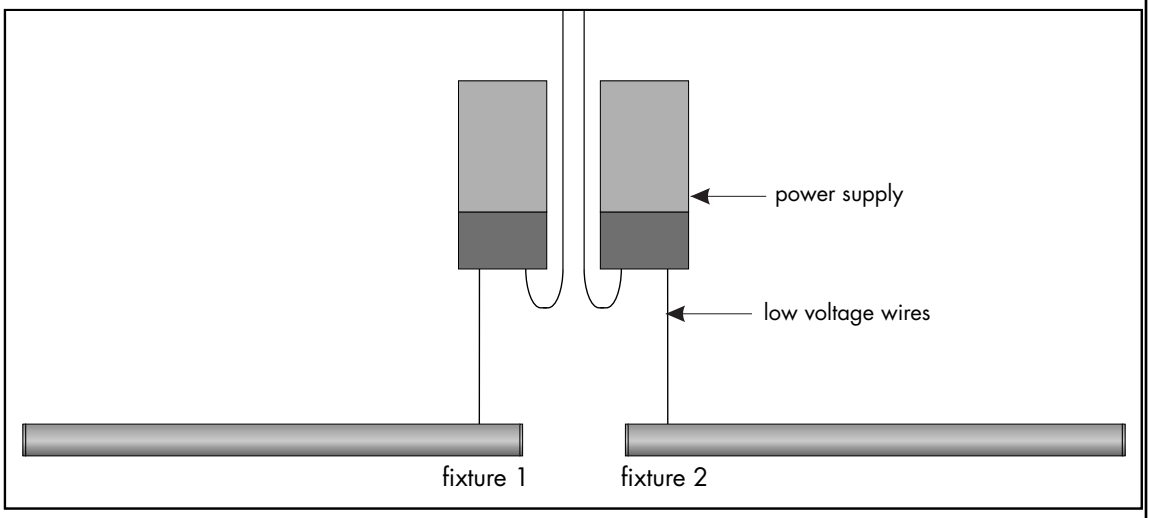

consecutive layout, NOT RECOMMENDED

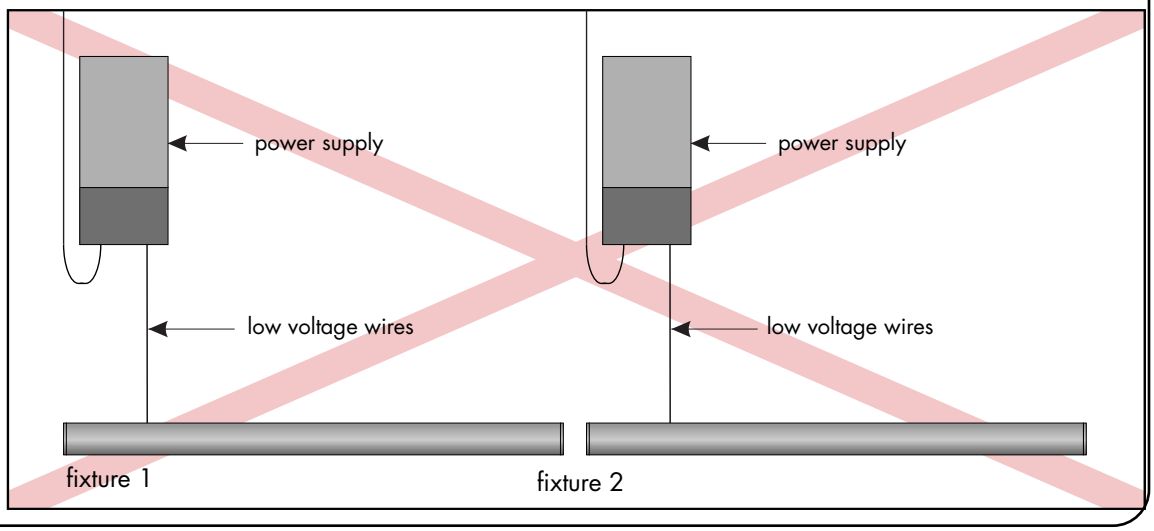

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE