Myka - Installation Instructions

Models MK-XX


Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. CABINET, UNDER-CABINET OR SURFACE MOUNT.
6. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.


c UL us LISTED

REV0.6
03112026


luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

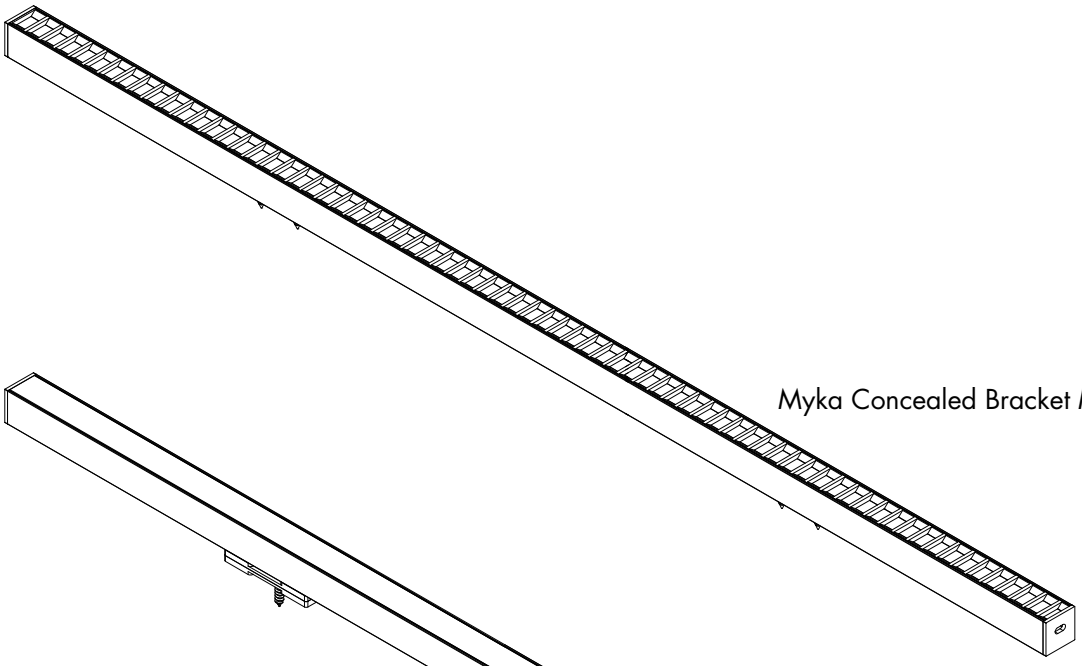

Myka Concealed Bracket Mounting

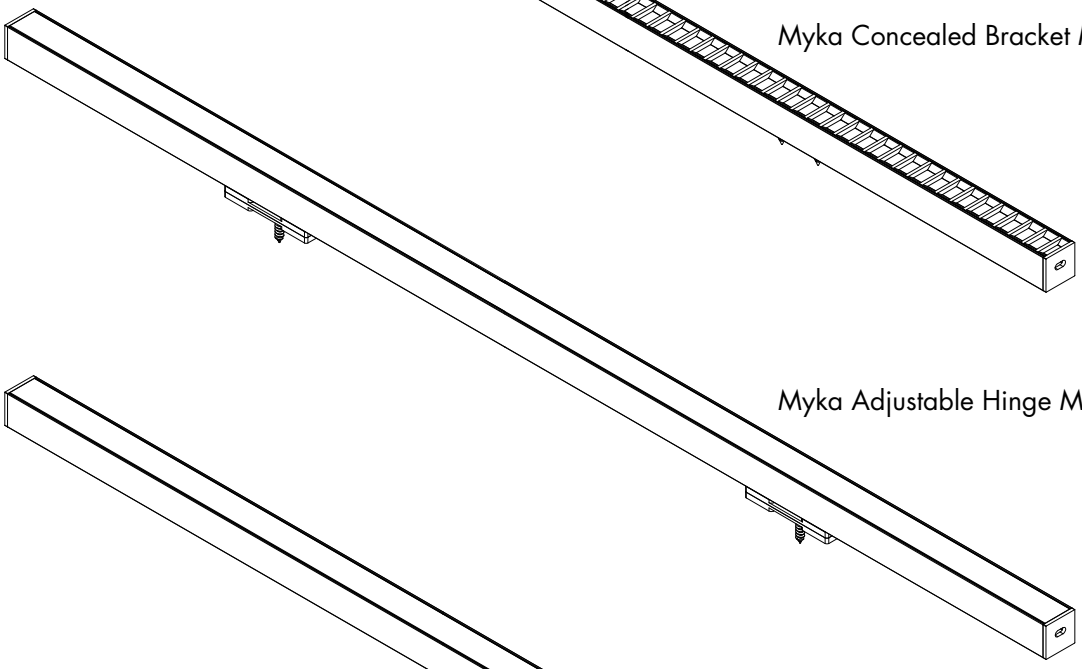

Myka Adjustable Hinge Mounting

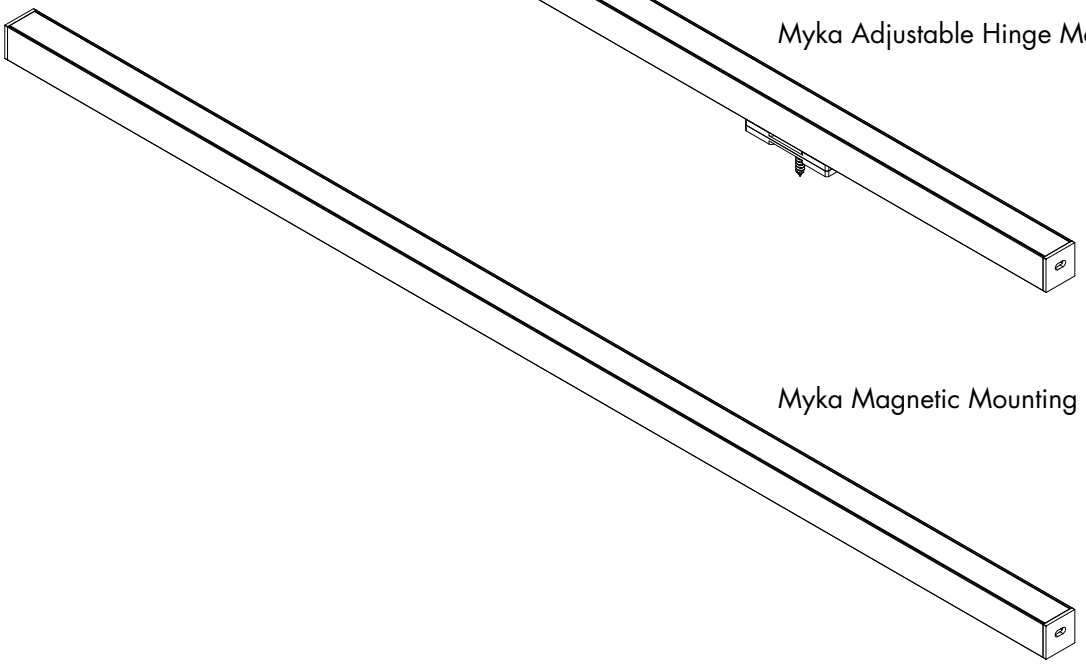

Myka Magnetic Mounting

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. CABINET, UNDER-CABINET OR SURFACE MOUNT.
6. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

c UL us LISTED


REV0.6
03112026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Magnetic Installation

CAUTION: The mounting means provided with this luminaire has not been evaluated for reliability. If installed where failure of the mounting means could cause injury to persons or damage to property below, supplemental means of securement should be considered."

1

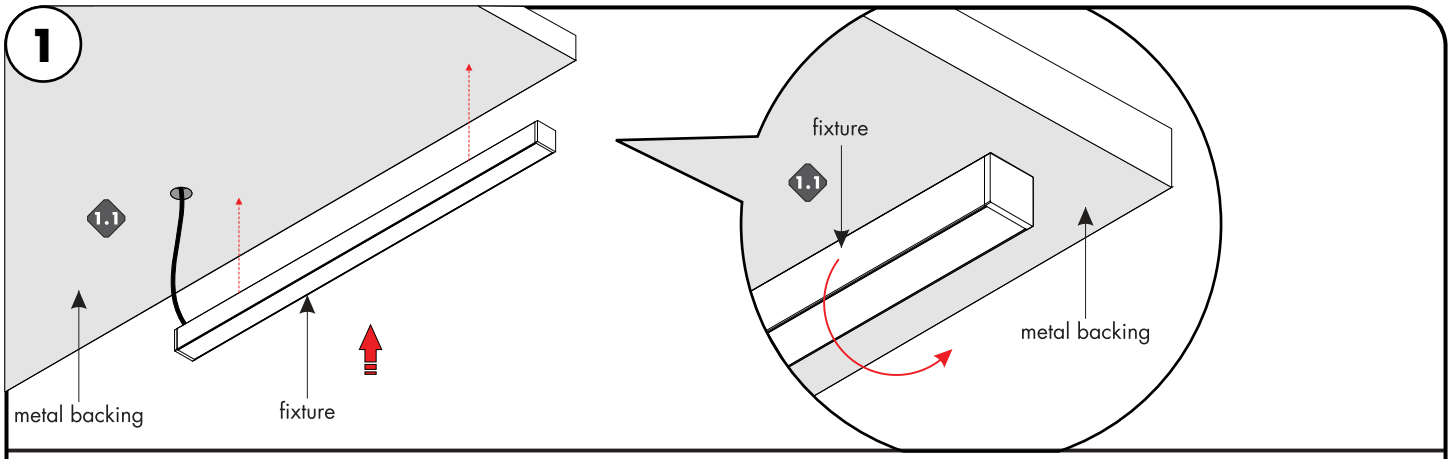


Note: : Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instruction for additional information.
Note: More than one person is recommended for this installation.

1.1 Determine the location of the fixture. Must be made of steel or a ferrous metal. Clean the surface area thoroughly from any debris. Snap the fixture onto the metal surface. If necessary fixture can easily be removed by rotating off the surface and repositioning correctly.

2


Follow one of the two options to connect the fixture to the power supply.

Option 1- Secure female quick connect to male quick connect. Feed male quick connect wire through conduit to power supply.

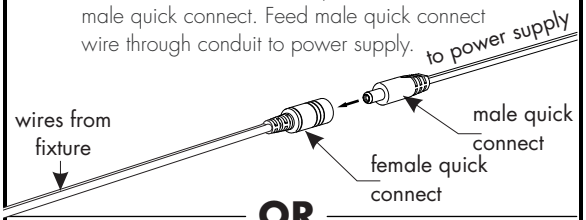

OR

Option 2- Feed wire whip to the power supply.




Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. CABINET, UNDER-CABINET OR SURFACE MOUNT.
6. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.


REV0.6
03112026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com


Concealed Bracket Installation

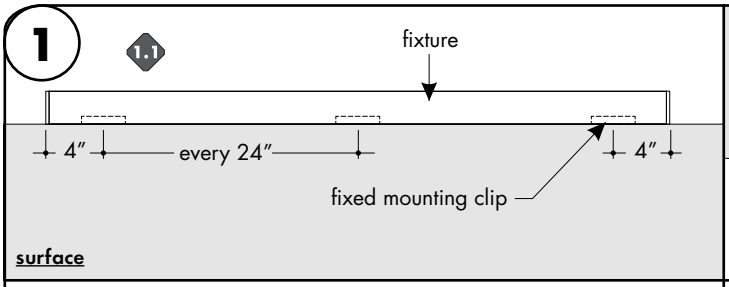


1.1 Determine the location of where the fixture(s) will be installed. Lay the fixture(s) on the surface, and make any necessary reference marks for the concealed mounting brackets. Make marks 4″ from each end of the fixture(s) and also every 24″ in between.

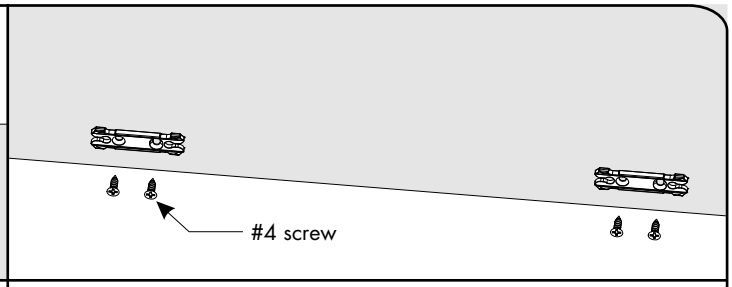


1.2 Lay the concealed bracket onto the reference mark points and secure using the provided hardware.

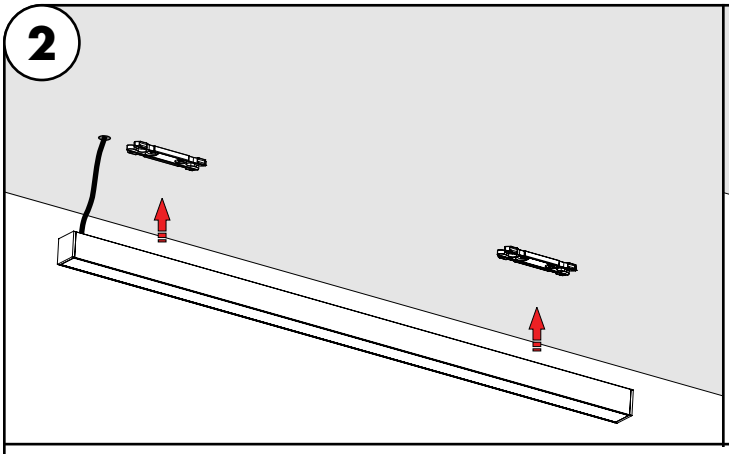

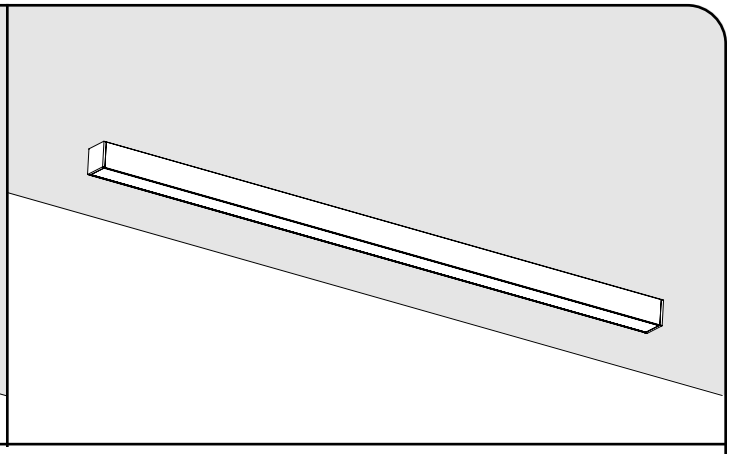

2.1 If necessary make any pass through holes for wire lead/connector to the surface, depending on the power feed option. Then snap the fixture into the concealed bracket to secure in place.

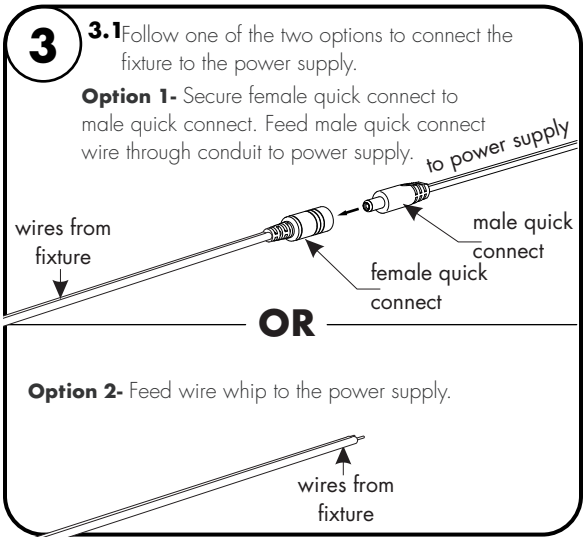

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Please read all instructions prior to installation and keep for future reference!


1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. CABINET, UNDER-CABINET OR SURFACE MOUNT.
6. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

REV0.6
03112026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com


Adjustable Hinge Installation

1

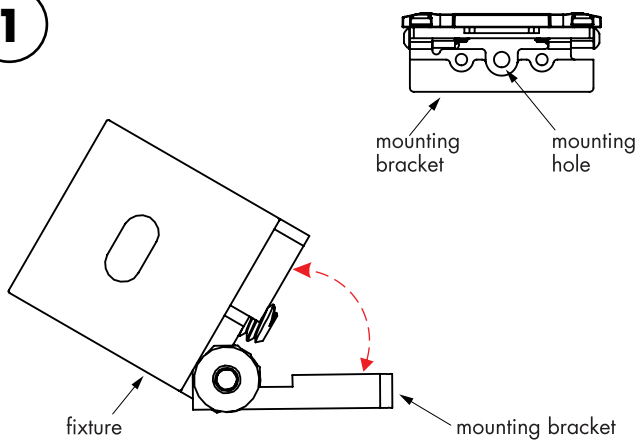

1.1 Slightly loosen both screws on the sides of the hinge bracket. Rotate the fixture to expose mounting hole.

2

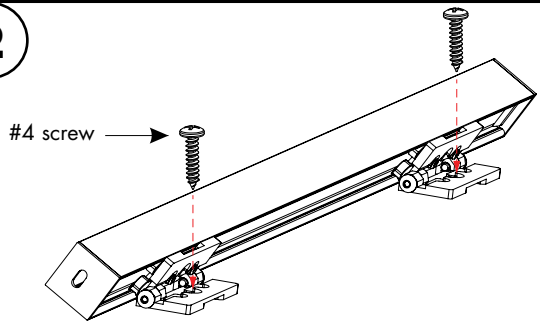

Note: : Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instruction for additional information.
Note: More than one person is recommended for this installation.


2.1 Determine the location of the fixture. Then secure the fixture to the surface using the provided mounting screws.

2.2 Rotate the fixture to the desired angle then tighten the side screws to secure.

3


Follow one of the two options to connect the fixture to the power supply.

Option 1- Secure female quick connect to male quick connect. Feed male quick connect wire through conduit to power supply.

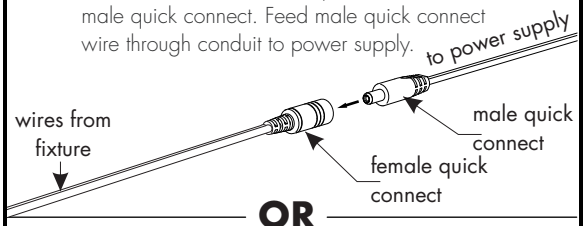

OR

Option 2- Feed wire whip to the power supply.

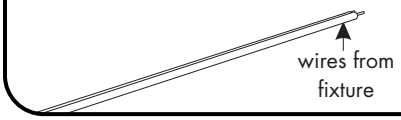

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Please read all instructions prior to installation and keep for future reference!


1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. CABINET, UNDER-CABINET OR SURFACE MOUNT.
6. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

REV0.6
03112026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com


Blade Louver Installation

1

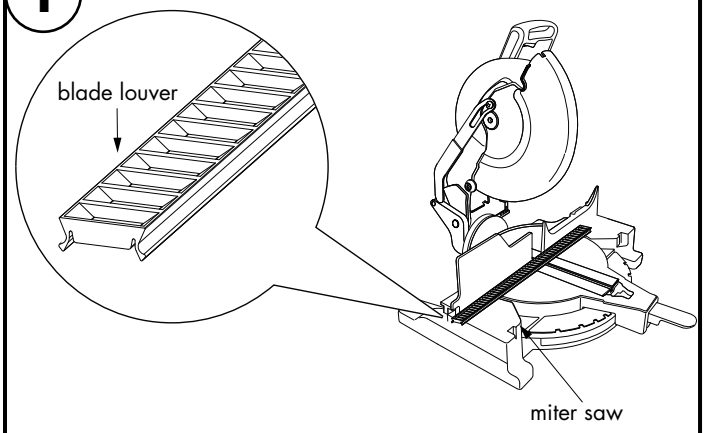


1.1 Use miter saw to cut the blade louver into desired length. Make sure blade louver and fixture lens are the same length.

2

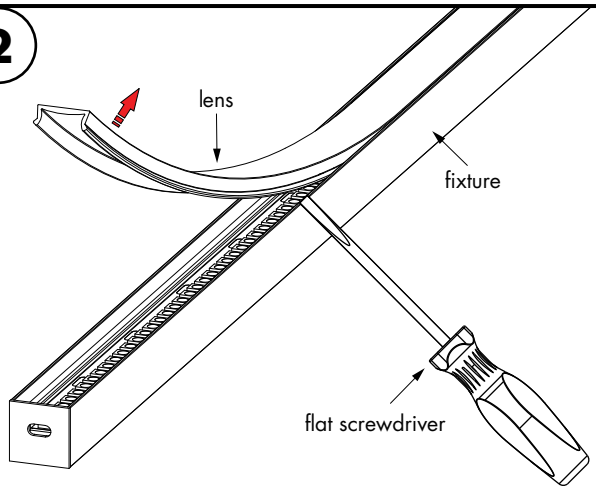

2.1 Use a flat screwdriver to remove the fixture lens.

3

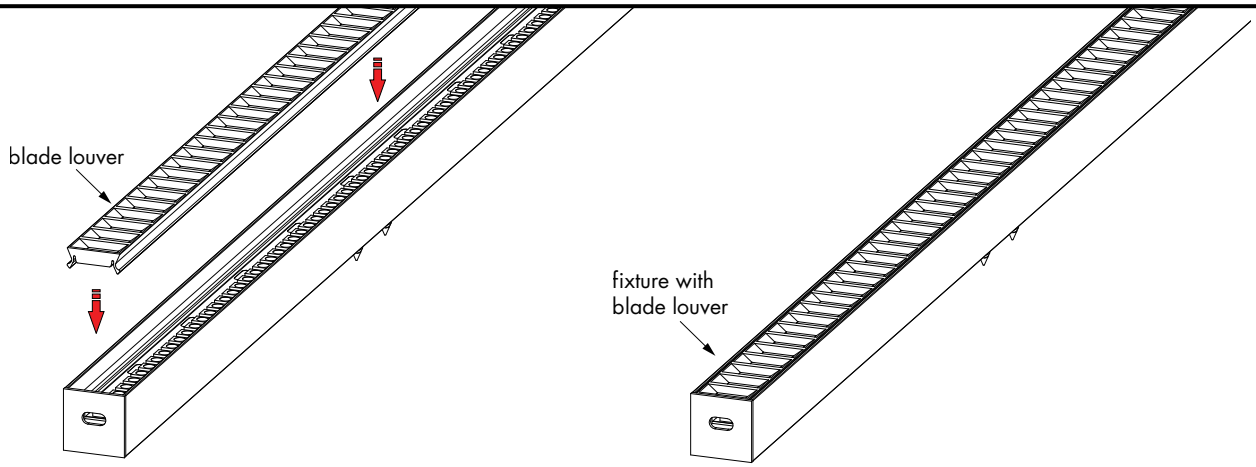

3.1 Snap the blade louver onto fixture.

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Myka - Installation Instructions

Models MK-XX

Please read all instructions prior to installation and keep for future reference!


1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. CABINET, UNDER-CABINET OR SURFACE MOUNT.
6. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

c UL us LISTED


REV0.6
03112026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com


power supplies at the end of the run

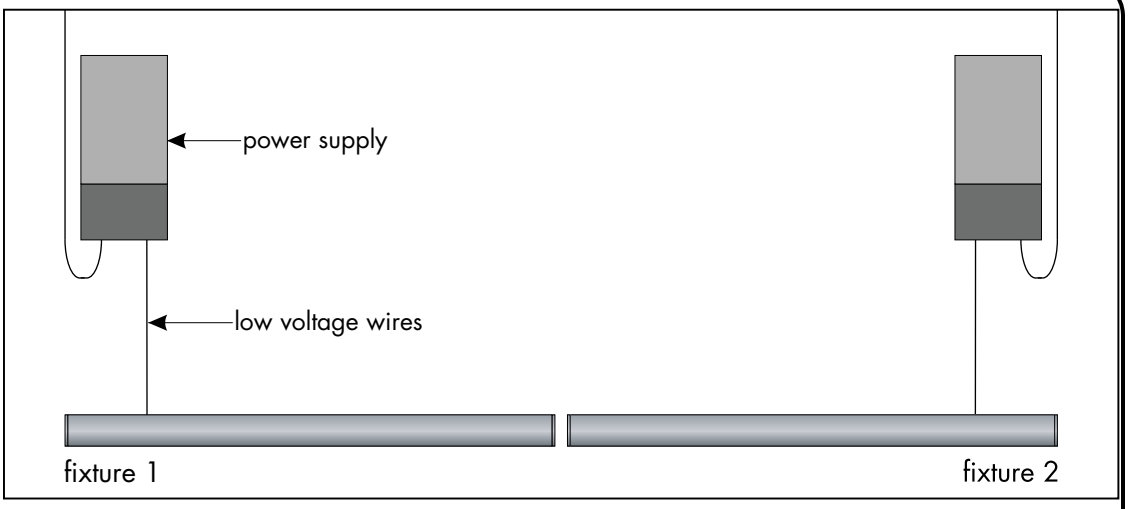

power supplies in the middle of the run

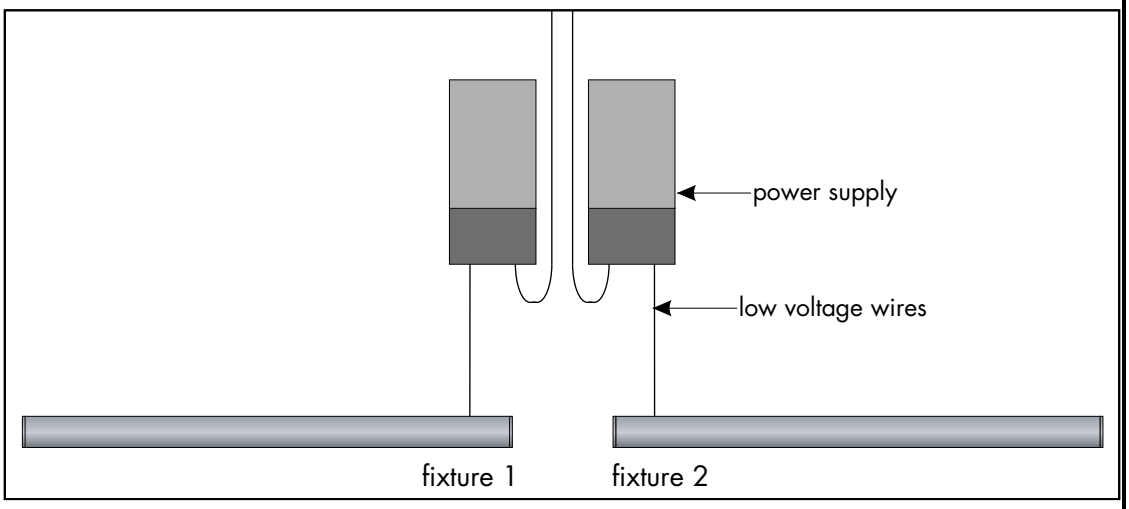

consecutive layout, NOT RECOMMENDED

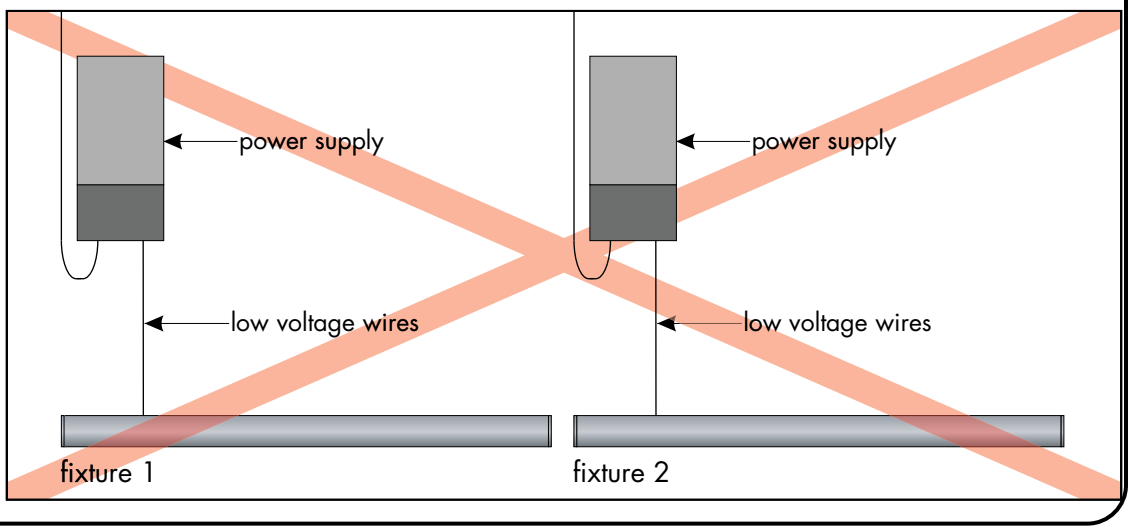

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. CABINET, UNDER-CABINET OR SURFACE MOUNT.
6. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.
7. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Power Supply Wiring Diagram

Note: *Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instructions for additional information.*

Static White
Wiring Diagram PDF