Myka Recessed Asymmetric Trimmed - Installation Instructions

Models MKRA-XX


Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.
6. TYPE IC.
7. INHERENTLY PROTECTED.
8. CABINET, UNDER-CABINET OR RECESSED MOUNT.
9. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.


c UL us LISTED

REV0.6
04242026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

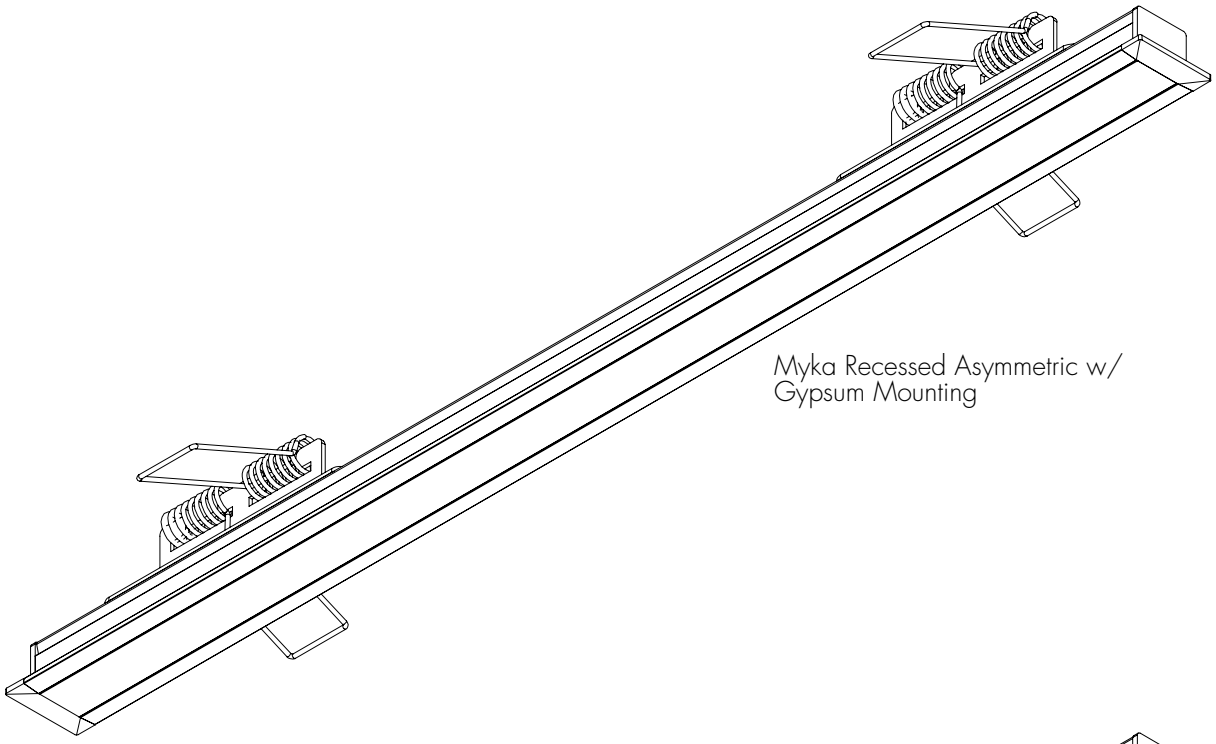

Myka Recessed Asymmetric w/
Gypsum Mounting

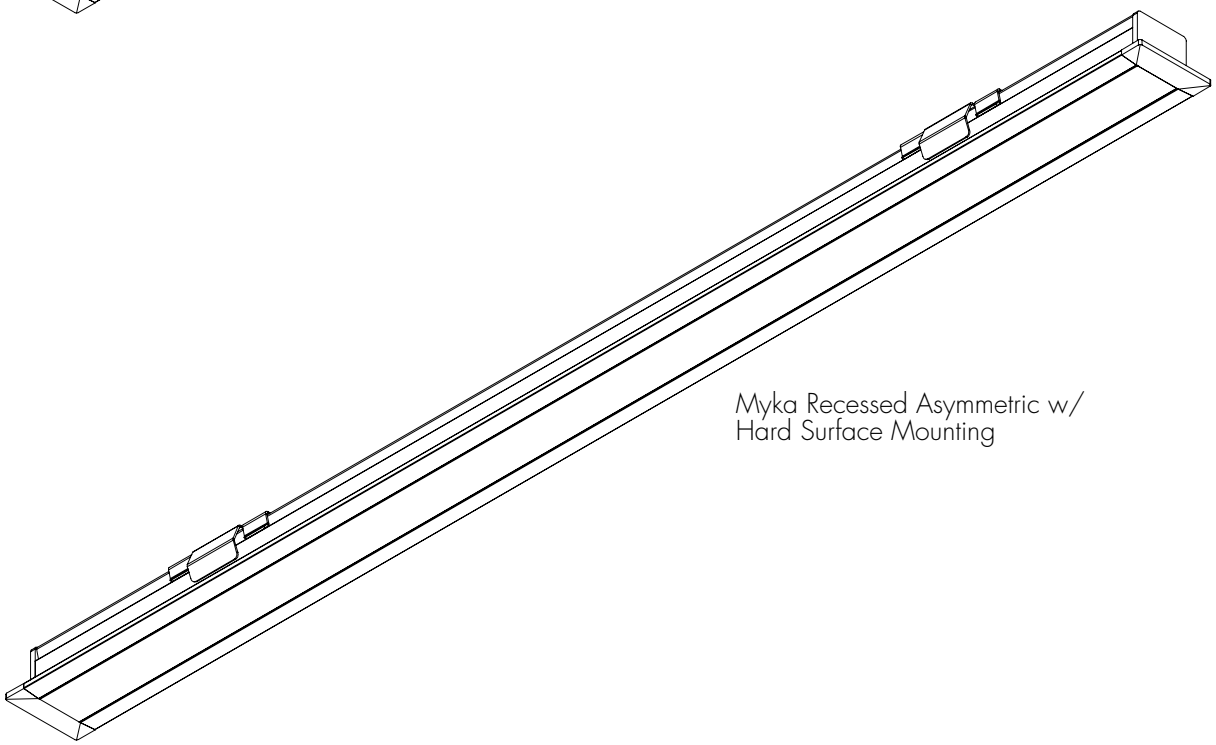

Myka Recessed Asymmetric w/
Hard Surface Mounting

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Myka Recessed Asymmetric Trimmed - Installation Instructions

Models MKRA-XX

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.
6. TYPE IC.
7. INHERENTLY PROTECTED.
8. CABINET, UNDER-CABINET OR RECESSED MOUNT.
9. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.


c UL us LISTED

REV0.6
04242026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com


1

Note: The fixtures can be installed in various mounting materials. As long as the recessed depth is considered as shown below. These light fixtures can be installed in a up or down position. Reference specific model for accurate dimensions.

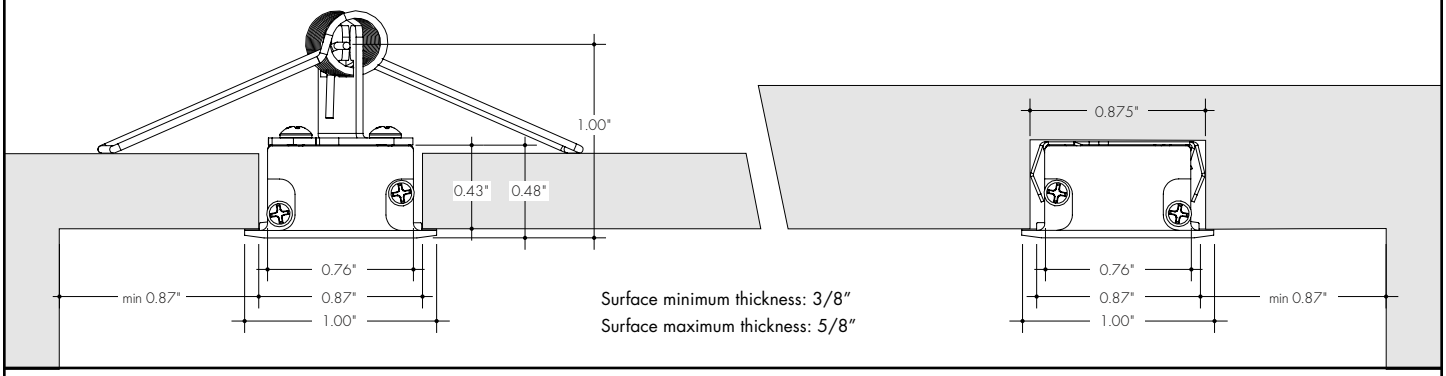

1.1 On the left is the Myka Recessed Asymmetric with the Gypsum Mounting spring brackets. On the right is the Myka Recessed Asymmetric with the Hard Surface Mounting brackets.

2

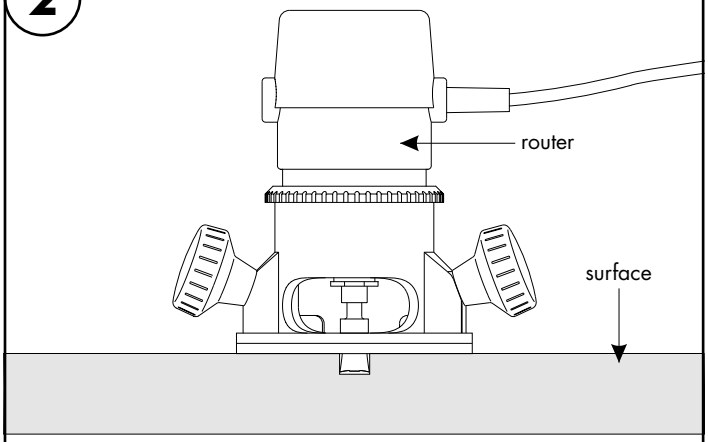


2.1 Route slots onto the surface with the proper width and depth to accommodate aluminum extrusion. Use drawing above as reference.

3

3.1 **For mounting bracket options only:**
Prior to installing the fixture, slide the mounting brackets on the back of the fixture. To evenly distribute the weight of the fixture.

soft surface mounting bracket,
such as drywall, plaster

hard surface mounting bracket,
such as wood, stone, tile

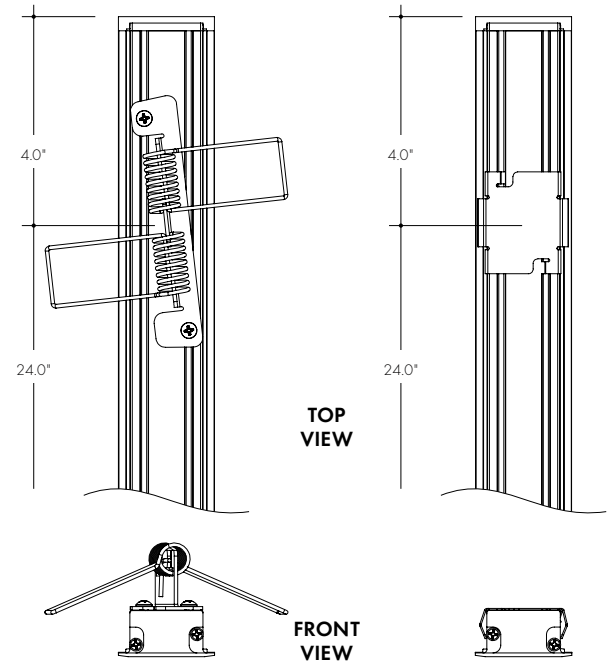

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Myka Recessed Asymmetric Trimmed - Installation Instructions

Models MKRA-XX

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.
6. TYPE IC.
7. INHERENTLY PROTECTED.
8. CABINET, UNDER-CABINET OR RECESSED MOUNT.
9. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

c UL us LISTED

REV0.6
04242026


luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com


4

Note: Fixture wires must be considered, prior to installing. Reference wiring diagram for additional information on step 5.

Note: Follow one of the two mounting options, to properly install fixture.


HS mounting:
Hard surface
mounting bracket

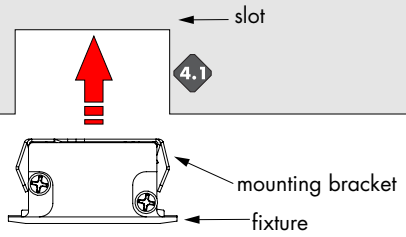




4.1 **For hard surface mounting bracket option:** Align the mounting brackets to the cutout slot, then carefully push the fixture completely inside to the slot to secure.


GS mounting:
Gypsum surface
mounting bracket

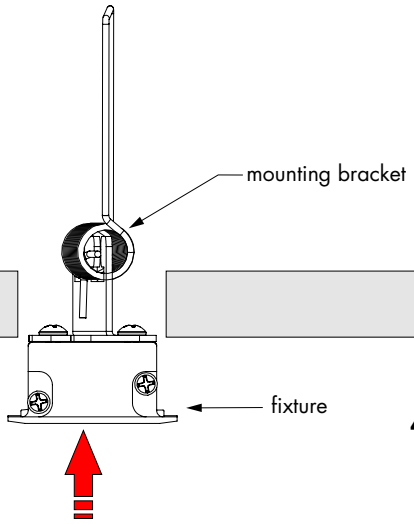

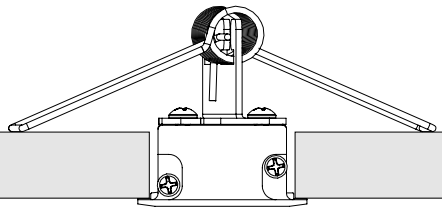

4.2 **For soft surface mounting bracket option:** Bend the adjustable springs to a straight position, followed by pushing the fixture completely inside the cutout slot. Then release the springs to secure.

5

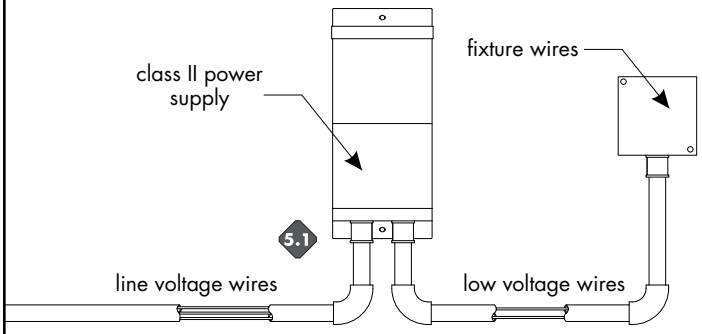

5.1 Ensure the correct (wattage & voltage) power supply is used to power the fixture. Then proceed to connect the fixture wires from fixture to the power supply. For more information please refer to power supply wiring instructions.

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Myka Recessed Asymmetric Trimmed - Installation Instructions

Models MKRA-XX

Please read all instructions prior to installation and keep for future reference!


1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.
6. TYPE IC.
7. INHERENTLY PROTECTED.
8. CABINET, UNDER-CABINET OR RECESSED MOUNT.
9. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

REV0.6
04242026

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com


Blade Louver Installation

1

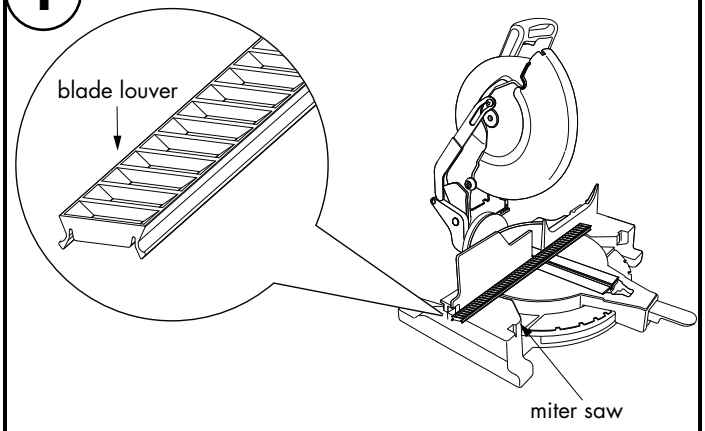


1.1 Use miter saw to cut the blade louver into desired length. Make sure blade louver and fixture lens are the same length.

2

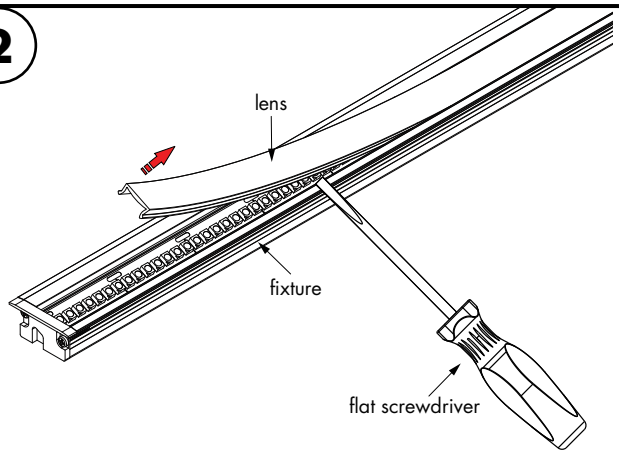

2.1 Use a flat screwdriver to remove the fixture lens.

3

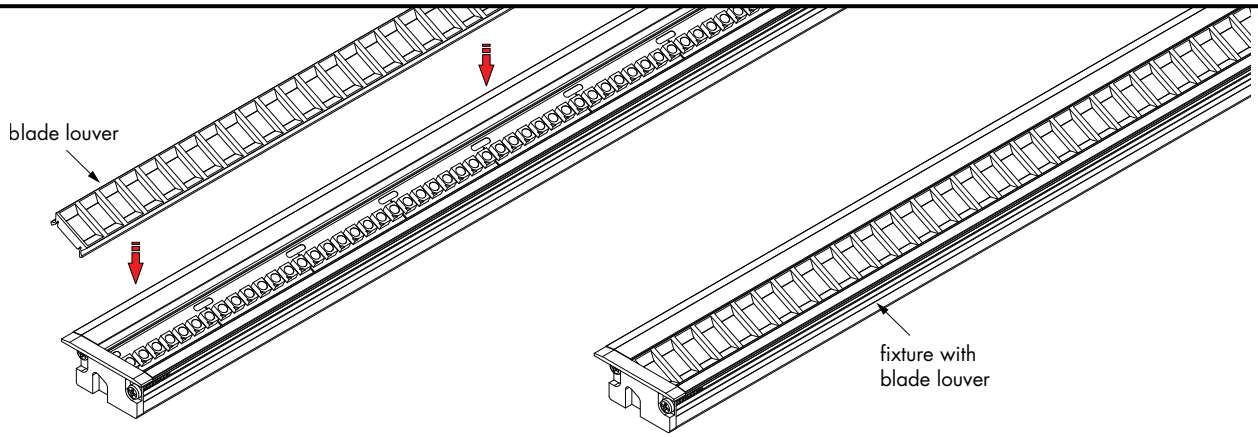

3.1 Snap the blade louver onto fixture.

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
4. SUITABLE FOR DAMP LOCATIONS.
5. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.
6. TYPE IC.
7. INHERENTLY PROTECTED.
8. CABINET, UNDER-CABINET OR RECESSED MOUNT.
9. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Power Supply Wiring Diagram

Note: *Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instructions for additional information.*

Static White
Wiring Diagram PDF