


Features

- 24VDC Class 2 fixtures made to order up to 144". Fixtures can be linked up to 37' depending on output
- Suitable for millwork, recessed, architectural reveals, and accent lighting applications
- Approved for closet/storage space installation per NEC 410.16(A) (3) and 410.16(C)(5) on outputs 5.7 W/ft or less
- Class two listed for damp locations.
- Dot free even illumination with frosted lens
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors.
- Warm Dim follows the incandescent dimming curve and is compatible with MLV, ELV, and Incandescent dimmers.
- Tunable White allows individual control of CCT and output, can be paired with Vintage Dim power supply for warm dim effect
- Average Life (L70): 50,000hrs
- 7 year warranty





Finish Options (see page 3 for additional information)

Powder Coat	Black	Bronze	White		
Premium	Matte Black	Warm Nickel	Aged Brass	Polished Gold	Chrome

Technical Information

TYPE	Warm Dim			Tunable White		
OUTPUT OPTIONS	WD51 (18K-30K)			TW51 (27K-65K)		
	SO	HO	VHO	SO	HO	VHO
Lumens Output (3000K) (All On w/ Clear Lens)	150 lm/ft	316 lm/ft	450 lm/ft	335 lm/ft	415 lm/ft	562 lm/ft
Average Power Consumption (for a 4' section)	2.3 W/ ft	4.7 W/ ft	6.9 W/ ft	4.4 W/ ft	5.4 W/ ft	7.6 W/ ft
Efficacy	65 lm/W	67 lm/W	65 lm/W	76 lm/W	77 lm/W	74 lm/W
Max Run Length (in series)	37 ft	22 ft	15 ft	27.9 ft	22 ft	15 ft
Ambient Operating Temperature Range*	-4°F – 113°F (-20°C – 45°C)	-4°F – 95°F (-20°C – 35°C)	-4°F – 77°F (-20°C – 25°C)	-4°F – 95°F (-20°C – 35°C)	-4°F – 95°F (-20°C – 35°C)	-4°F – 77°F (-20°C – 25°C)
Control/Dimming Protocol	0–10V, DALI, DALI2, MLV (Triac), ELV, Incandescent			0–10V, DMX, DALI-DT8		

*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

Warm Dim (WD51)

CCT		Multiplier (ref. - 18K30K)	TM-30			
			CRI	R_f	R_g	R_9
18K24K	1800K	0.90	92	85	91	86
	2400K		96	95	104	97
18K27K	1800K	0.97	92	85	91	86
	2700K		96	95	104	96
18K30K	1800K	1.00	92	85	91	86
	3000K		95	95	104	90

Tunable White (TW51)

CCT		Multiplier (ref. - 27K65K)	TM-30			
			CRI	R_f	R_g	R_9
18K30K	1800K	0.78	92	85	91	86
	2400K		95	93	106	98
	3000K		97	94	104	95
27K65K	2700K	1.00	97	95	103	93
	4200K		96	93	105	95
	6500K		91	90	101	63

Ordering Code

MODEL - LENGTH[1] - OUTPUT[2] - CCT - LENS - MOUNTING - FINISH[3] - FEED POSITION LEFT[5] - FEED POSITION RIGHT[5]

MODEL
MKR-BABA - Myka Recessed Trimmed BABA

LENGTH[1]
12"–144" 2" increments
12"–144" 2" increments

OUTPUT[2]
WD51SO - Standard
WD51HO - High
WD51VHO - Very High
TW51SO - Standard
TW51HO - High
TW51VHO - Very High

CCT
18K24K - 1800K - 2400K
18K27K - 1800K - 2700K
18K30K - 1800K - 3000K
18K30K - 1800K - 3000K
27K65K - 2700K - 6500K

LENS
C - Clear
HF - Half Frosted
F - Frosted
MF - Matte Frosted
BLV - Black Blade Louver
WLV - White Blade Louver

MOUNTING
HS - Hard Surface Mounting Bracket
GS - Gypsum Surface Mounting Bracket
NB - No Bracket

FINISH[3]
POWDER COAT
BK - Black
BZ - Bronze
WH - White

PREMIUM
MBK - Matte Black
WN - Warm Nickel
AB - Aged Brass
PG - Polished Gold[4]
CH - Chrome[4]

FEED POSITION LEFT[5]
PLENUM WIRE LEADS (72")
LPE - Wire End Feed
LPB - Wire Back Feed
LNPF - No Power Feed

QUICK CONNECTS (4")
LFE - Female Q/C, End Feed
LFB - Female Q/C, Back Feed
LNPF - No Power Feed


FEED POSITION RIGHT[5]
PLENUM WIRE LEADS (72")
RPE - Wire End Feed
RPB - Wire Back Feed
RNPF - No Power Feed

QUICK CONNECTS (4")
RFE - Female Q/C, End Feed
RFB - Female Q/C, Back Feed
RNPF - No Power Feed

1 - Custom lengths and increments are available, please consult Inside Sales with specific request.
2 - Warm Dim and Tunable White options can be used to comply with Title 24 JA8 at max brightness depending on Lens selection, see multiplier charts to calculate specific efficacy.
3 - Finishes may have extended lead times and price adders. Custom RALs are available, contact Inside Sales with specific request.
4 - Polished Gold, and Chrome finishes have a maximum fixture length of 96".
5 - LNPF - RNPF is not a valid configuration option

Powerfeeds and Connectors

Power Feed Position Options and Orientation

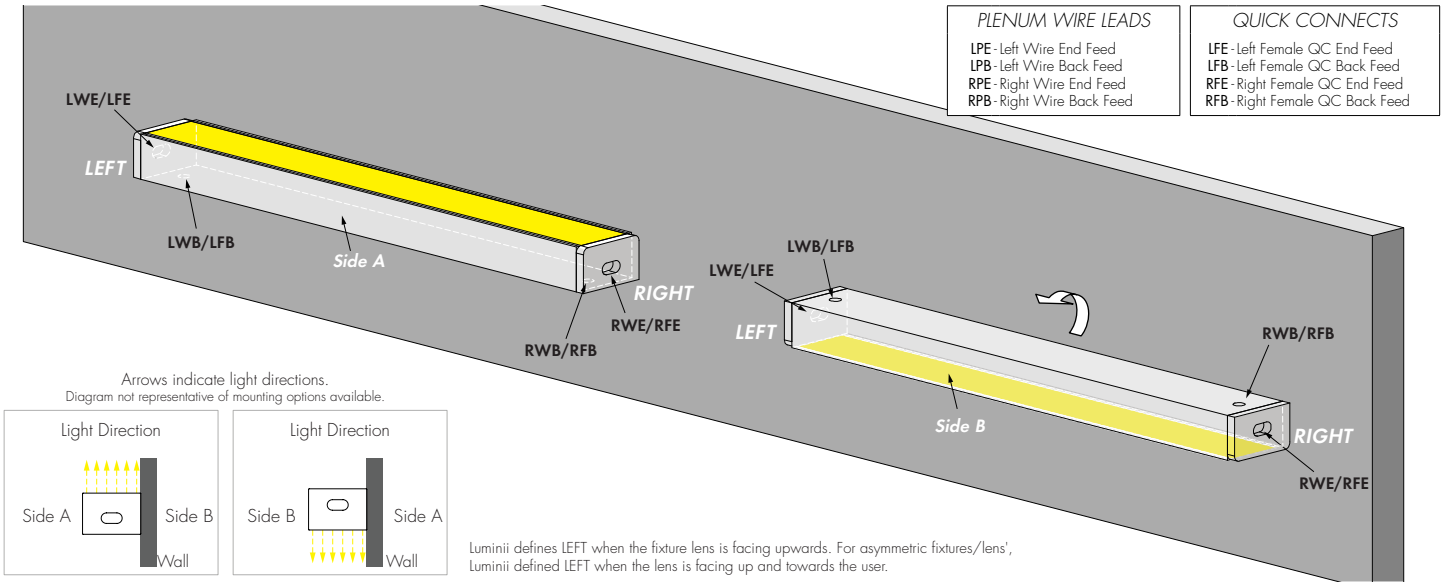


Arrows indicate light directions.
Diagram not representative of mounting options available.


Luminii defines LEFT when the fixture lens is facing upwards. For asymmetric fixtures/lens', Luminii defined LEFT when the lens is facing up and towards the user.

Linking and Extension Cable Options


For use with Warm Dim (WD51):

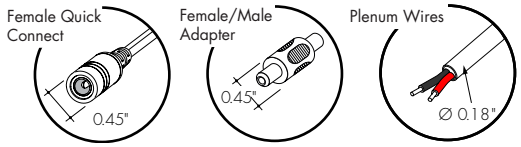


LMC-70
Male quick-connect long, 2 pin, 70"




EC-48
Female/Female Extension Cable, 2 pin, 48"




FMA
Female to male adapter




For use with Tunable White (TW51):

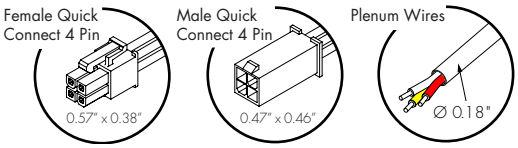


MOLEX-CON-LEAD-M-3-48
Molex Male Connector Cable, 3 pin, 48"




MOLEX-JC-F-M-3-48
Female/Male Jumper Cable, 3 pin, 48"




MOLEX-JC-M-M-3-4
Female to Male Adapter, 3 pin, 4"



Sample Layout

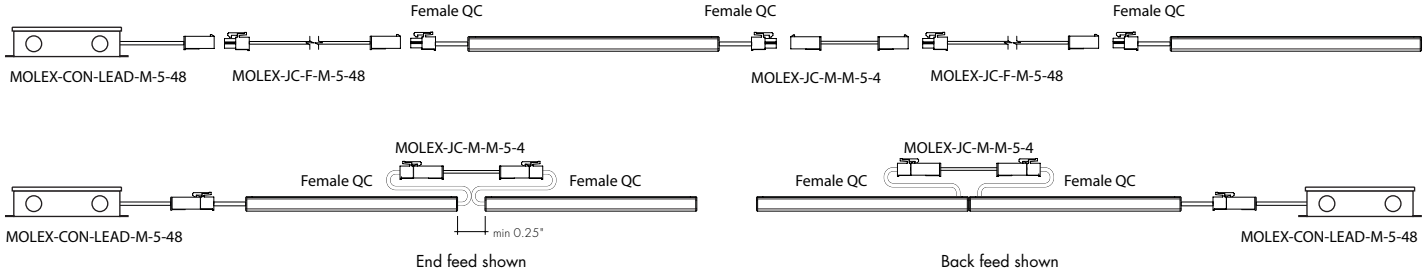

Product Dimensions

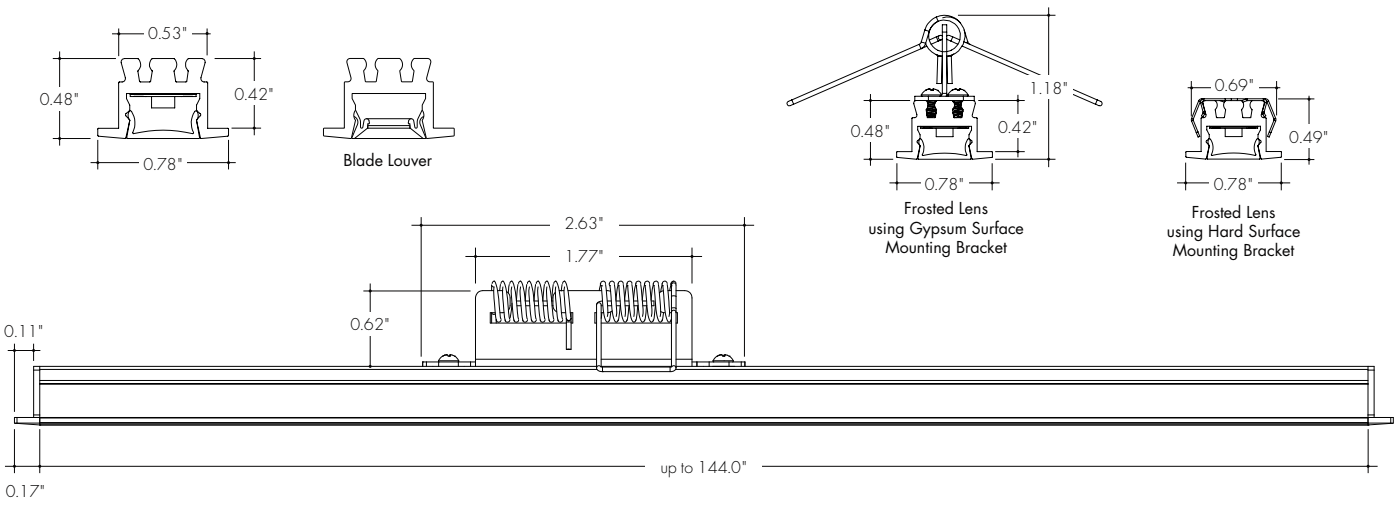

Finish Options

- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Finishes may have extended lead times and price adder.
- Polished Gold and Chrome finishes have a maximum fixture length of 96".
- Custom RALs are available, please consult Inside Sales with specific request.

Black
Powder Coat



Black is a true deep black with a glossy finish.

Bronze
Powder Coat



Bronze is a rich, dark brown with a satin finish.

White
Powder Coat



White is a polar bright white and field paintable.

Matte Black
Premium




Matte Black is a dark, pitch-black with a soft flat finish.

Warm Nickel
Premium




Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

Aged Brass
Premium




Aged Brass is a deep brown shade with slightly golden undertones.

Polished Gold
Premium



Polished Gold is bright and radiant for a brilliant finish.

Chrome
Premium




Chrome is a highly reflective silver polish.

Light Transmission and Dotting

	Lens/Accessory																							
Output Options	**Clear Lens**				**Half Frosted Lens**				**Frosted Lens**				**Black Blade Louver**				**White Blade Louver**				**Matte Frosted Lens**			
Dimming Level	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%	100%	50%	10%	1%
WD51SO	CD	CD	CD	CD	CD	CD	CD	CD	ND	SD	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	SD	CD
WD51HO	CD	CD	CD	CD	CD	CD	CD	CD	ND	SD	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	SD	CD
WD51VHO	CD	CD	CD	CD	CD	CD	CD	CD	ND	SD	SD	SD	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	SD	CD
TW51SO (All On)	CD	CD	CD	CD	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	SD	CD
TW51HO (All On)	CD	CD	CD	CD	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	SD	CD
TW51VHO (All On)	CD	CD	CD	CD	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	SD	CD
TW51SO (1 CH)	CD	CD	CD	CD	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	SD	CD
TW51HO (1 CH)	CD	CD	CD	CD	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	SD	CD
TW51VHO (1 CH)	CD	CD	CD	CD	CD	CD	CD	CD	ND	SD	SD	CD	ND	ND	ND	ND	ND	ND	ND	ND	SD	SD	SD	CD
Transmission Percentage	100%				84%				60%				31%				53%				73%			

Use complete Dotting Chart Tool online for more dotting information

I'm also click-able




CD - Clear Dotting

SD - Slight Dotting


ND - No Dotting

Accessory Options

LVSP-4T-BK
Low Voltage, 4 Terminal Splice Box, Black, IP20




LV-BL-MKC-12-BK
Blade Louver reduces glare at high angle in two directions
Also available with complete fixture, use ordering code **-BLV**

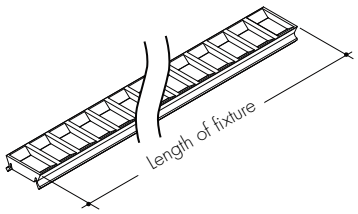

This Black louver/lens combo comes in 12" increments and sits in place of a Myka lens, not in addition to.

LV-BL-MKC-12-WH
Blade Louver reduces glare at high angle in two directions
Also available with complete fixture, use ordering code **-WLV**

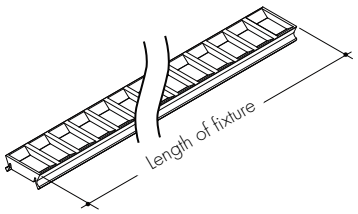

This White louver/lens combo comes in 12" increments and sits in place of a Myka lens, not in addition to.

Power Consumption

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, ouput, and desired power feed to get a full power consumption table.

I'm also click-able

Desired Nominal Length: _____

Desired Output: _____

Desired CCT: _____

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Maximum Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

For use with Warm Dim

Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL		INPUT CONTROL		WATTAGE		OUTPUT
	–		–		–	
PS - Power Supply, 120-277VAC		**UNI** - 0-10V Dimming (0.1%), Phase Dimming (0.1%)		**30** - 30 Watts **60** - 60 Watts **96** - 96 Watts **3x96** - 3x96 Watts		**24** - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.


0-10V - 0.1% dimming
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

PS-UNI-30/60/96

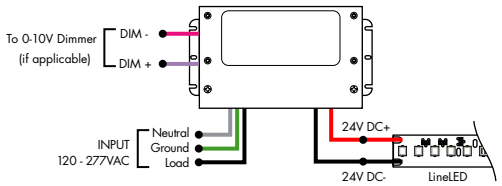


PS-UNI-3X96

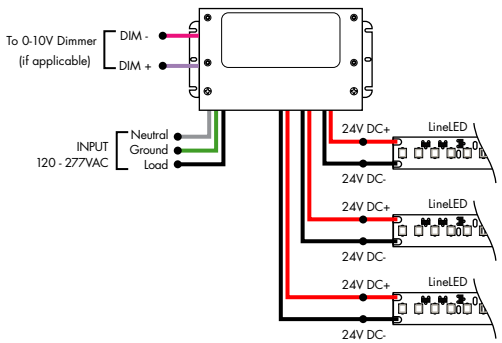

Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL		INPUT CONTROL		ENVIRONMENT		WATTAGE		OUTPUT
	-		-		-		-	
PS - Power Supply, 120-277VAC		**DALI2-DT6** - DALI2 DT6 (0.1%)		**D** - Dry		**96** - 96 Watts		**24** - 24 VDC

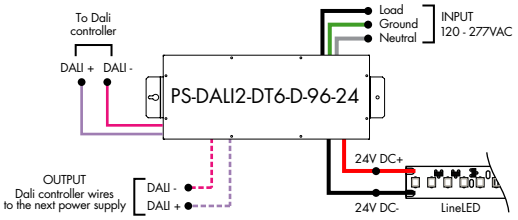

Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"


Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

For use with Warm Dim


Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL		INPUT CONTROL		ENVIRONMENT		WATTAGE		OUTPUT
	-		-		-		-	
PS - Power Supply, 120-277VAC		010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic		D - Dry		96 - 96 Watts 3x96 - 3x96 Watts		24 - 24 VDC

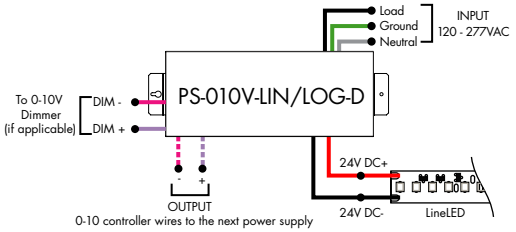

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"


PS-010V-LIN/LOG-D-3X96

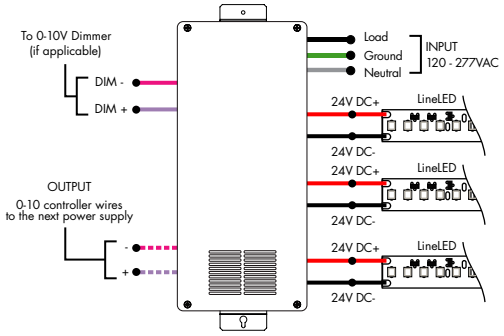

Ordering Code - Athena 0-10V LED Driver

MODEL		INPUT CONTROL		ENVIRONMENT		WATTAGE		OUTPUT		FEATURE
	-		-		-		-		-	
PS - Power Supply, 120-277VAC		010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic		D - Dry		96 - 96 Watts		24 - 24 VDC		AWNR - Athena Wireless Node

PS-010V-LIN/LOG-D-96-ANWR

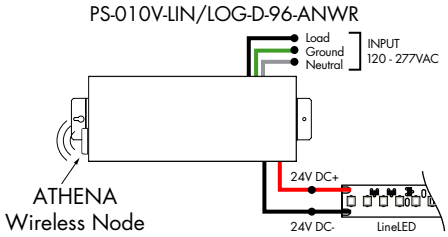

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"


Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

For use with Tunable White

Ordering Code - DALI2 Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-DT8 - DALI DT8 Tunable White (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC

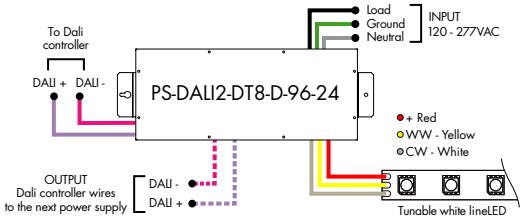

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Ordering Code - Athena DALI2 Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	DALI2-DT8 - DALI DT8 Tunable White (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC	AWNR - Athena

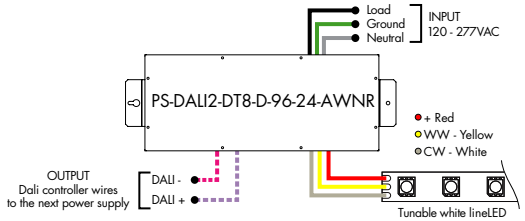

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Ordering Code - DALI2 Dimming Power Supplies 0.1% 120VAC - 277VAC - for Dim-to-Warm functionality with Tunable White Output

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-WD - DALI2 DT6 Warm Dim (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC

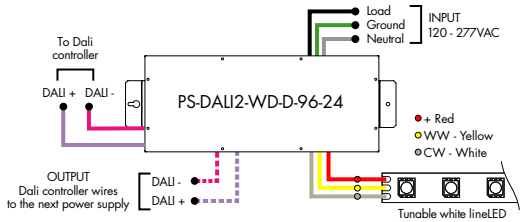



MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DMX - DMX (0.1%)	D - Dry	96 - 96 Watts 3X96 - 3X96 Watts	24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

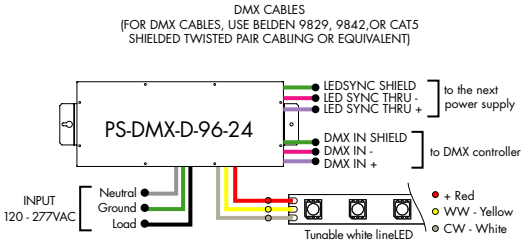

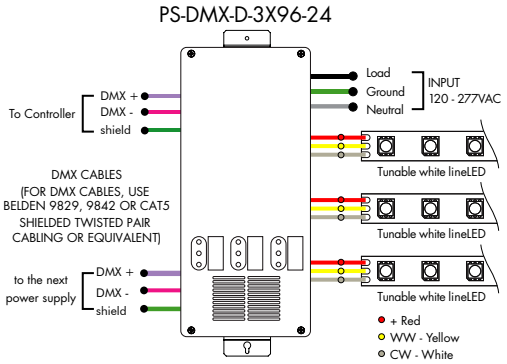


Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

For use with Tunable White


Ordering Code - VintageDim® 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	010V-WD - 0 -10V Dimming (0.1%), Standard Warm Dim Curve (with Tunable White LED) 010V-TW - 0 -10V Dimming (0.1%), Two Channel Control, Brightness and CCT1-CCT2 Ratio 010V-2CH - 0 -10V Dimming (0.1%), Two Channel Control, LED1 Brightness and LED2 Brightness 010V-WDX - 0 -10V Dimming (0.1%), Customizable Warm Dim Curve (with Tunable White LED)	D - Dry	96 - 96 Watts 3X96 - 3x96 Watts[1]	24 - 24 VDC

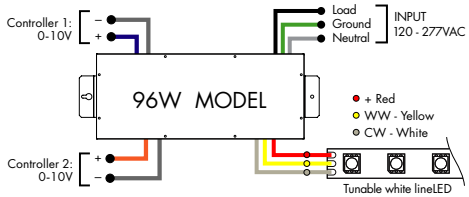


1 - 3x96 is only available with input control options 010V-WD and 010V-TW

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

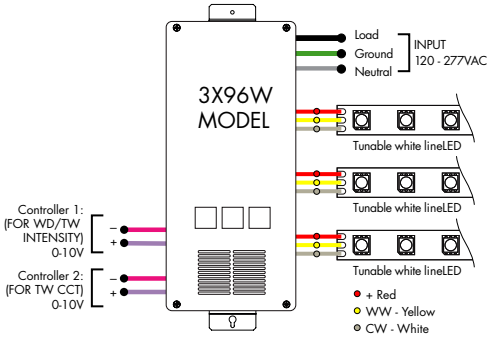

Ordering Code - Athena VintageDim® 0-10V Power Supply 0.1% 120VAC - 277VAC - for Dim-to-Warm functionality with Tunable White Output


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-WD - 0-10V Dimming, Standard Warm Dim Curve (with Tunable White LED)	D - Dry	96 - 96 W	24 - 24 VDC	AWNR - Athena

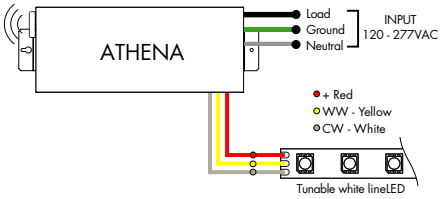

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Ordering Code - Athena VintageDim® 0-10V Two Channel LED Driver, 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-2CH - 0-10V Dimming Two Channel Control, LED1 Brightness and LED2 Brightness	D - Dry	96 - 96 W	24 - 24 VDC	AWNR - Athena

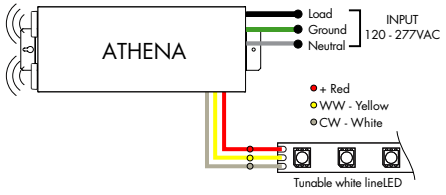

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Controllers and Decoders

For use with Tunable White Power Supplies



ORDERING CODE

MODEL

DTW-MC

DTW-MC - Tunable White controller

Tunable White wall-mount controller controls lighting fixtures, wireless control of TW lighting fixture. Fits in any standard US switch box. Includes all the outputs in the back of the controller.

Features

- Switch & dimming control function, control range > 20M.
- Smooth transition between light levels.
- Separately operate dimming and color temperature functions.
- Able to control 1 zone with endless receivers. Each receiver can maximally be controlled by 8 remotes.
- Power, temperature color and dimming functions operated by push button after receivers are connected.

Operating Voltage

3V DC battery

Color Parameters

- Brightness
- Saturation
- Fading



ORDERING CODE

MODEL

TW-DMX

TW-DMX - DMX controller

Tunable White DMX wall-mount controller is a fully touch sensitive controller designed in accordance with standard protocol DMX512. Offers fast and accurate color temperature adjustment and brightness dimming of natural white, warm white and cold white. Designed with a touch color wheel, the DMX512 controller can adjust color temperature and brightness for all white LEDs smoothly and accurately. The DMX controller can control 1 zone with endless decoders.

Features

- 1 zone
- 6 color scenes
- DMX Control
- Touch Sensitive Glass Surface
- Dimming and Speed Control
- Memory Function
- Easily Fits Standard US Switch Boxes

Operating Voltage

12 - 24V DC

Color Parameters

- Brightness
- Saturation
- Primary colors
- Fading
- Color changing speed



ORDERING CODE

MODEL

SLD-DIMTW

SLD-DIMTW - Tunable white LED dimming module

The SLD DimTW is a constant voltage warm dimming LED dimming module. The unique dimming module accepts 0-10V control and mimics a smooth, incandescent dimming curve.

Features

- Flicker free 0-100% dimming
- High efficiency up to 97%
- High precision dimming ratio:>1:1000
- Fully isolated plastic housing
- Comply with EN55015 and FCC part 15 without additional input filter and capacitors
- compact size, high reliability
- 3 years warranty

Operating Voltage

8-48 VDC

Controllers and Decoders

For use with Tunable White, RGB/RGBW Power Supplies



Translates controller DMX512 programs for RGB and white LED strips.

Unique DMX address for the decoder can be set easily and displayed by the numeric display on the case. Changing and resetting the DMX address requires manual input.

Use power repeater to expand output.

Operating Voltage

12-36 VDC

Power Capacity

up to 96W at 24V

Operating Temperature Range

from -4°F to +122°F in case

ORDERING CODE

MODEL

DDMX-RGBW

DDMX-RGBW - DMX decoder



The RGBW receiver is easily paired with controller by the click of a button. Receiver can be reset to factory settings at any time.

Each receiver can store one static RGB color, one color sequence, and one brightness setting for the white LED strip. Receivers assigned to the same scene within the same zone will have the same LED static color and color sequence.

Operating Voltage

12-36 VDC

Power Capacity

up to 96W at 24V

Operating Temperature Range


from -4°F to +122°F in case

ORDERING CODE

MODEL

RGBW-RC-R

RGBW-RC-R - RGBW receiver

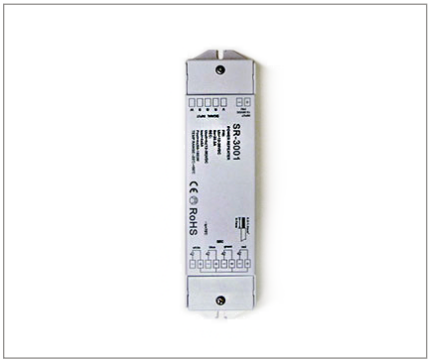

Extends identical signal when connected in series to an RGBW LED control system. The RGBW signal repeater works with Luminii RGB and RGBW controllers, receivers, and decoders.

RGBW signal can be extended indefinitely when adequate power supply (not included) is connected to the system.

Operating Voltage

12-36 VDC

Power Capacity

up to 96W at 24V

Operating Temperature Range

from -4°F to +122°F in case

ORDERING CODE


MODEL

RGBW-SR

RGBW-SR - RGBW signal repeater

Controllers and Decoders

For use with Tunable White, RGB/RGBW Power Supplies

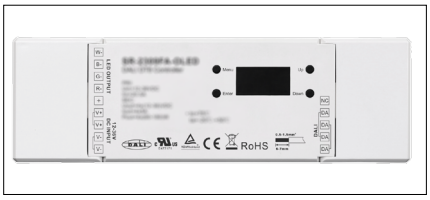

ORDERING CODE

MODEL

DALI2-DT8-RGBW

DALI2-DT8-RGBW - DALI-2 RGBW Decoder

A 4-channel DALI2 DT8 decoder designed to control RGB, RGBW, and TW LED fixtures, featuring adjustable color temperature and customizable lumen output.

Voltage/Frequency
12-36VDC

Max Output Power
4 output channels, 60-180W each

Max Output Current
4 output channels, max of 5A each

Ambient Operating Temperature Range
-20 to 50°C

Environment
Dry (IP20)



ORDERING CODE

MODEL

DDMX-5CH-RDM-PRO

DDMX-5CH-RDM-PRO - DMX512 Decoder

DMX512 decoder with RDM functionality features 5 PWM output channels with common anode. High PWM output frequency range allows the product to be used in HD video conferencing spaces. All DMX products to be installed per DMX512 Standard.

Power
96 Watt

Inputs
RJ45, XLR-5Pin, Terminal Block

DMX Channels
1 to 5 settable

PWM Output Resolution Ratio
8 or 16 bit

PWM Output Frequency
500Hz - 30KHz

Output Dimming Curve Gamma Value
0.1 ~ 9.9



ORDERING CODE

MODEL

RGBW-WI-R

RGBW-WI-R - WIFI generator

RGBW-WI-R creates a local network that enables any electronic device (phone, tablet, etc.) to control the RGB/W strip connected to a RGBW-RC-R receiver.


The control functions are achieved through a free application download for Android and iOS devices called REALCOLOR.

Operating Voltage
12-36 VDC

Power Supply
PI-130-24 (included)

Operating Temperature Range
from -4°F to +122°F in case

For use with Tunable White, RGB/RGBW, Pixel Power Supplies

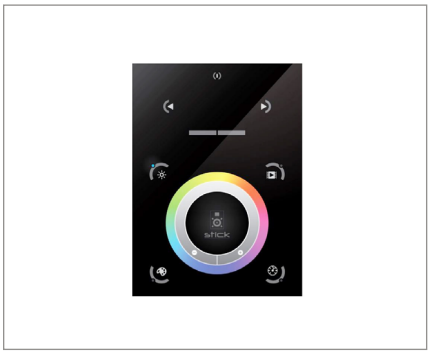

ORDERING CODE

MODEL

TSDMX-E

TSDMX-E - Touchscreen DMX controller

Programmable advanced DMX512 lighting controller featuring a touch-screen interface. Operates as stand alone controller or integrated with most architectural lighting control systems. Can controller endless DMX512 enabled devices.

Mounts to standard single or dual gang wall box with the included power supply inside the junction box. Terminal block design for power and data connections.

Features

- Sleek glass design which sits 0.43" from the wall
- Graphical color display to show selected environment
- Color/dimmer/speed palette
- Color temperature mixing
- Touch sensitive buttons. No mechanical parts
- Touch sensitive wheel allows for accurate color selection
- Multi-zone microSD memory
- Multi-room control with 500 scenes, 10 zones
- 1024 DMX channels. Control 340 RGB fixtures
- USB & Ethernet connectivity for programming and control

Power Supply
7 VDC (included)

Programmability
PC, Mac, Tablet, Smartphone

Output Signal
DMX512 (1024 channels)

Color Parameters

- Brightness
- Saturation
- Speed of color changing sequence
- Fading / dimming / brightness