

Features



- Constant voltage output
- Input Voltage 120-277VAC
- Compatible with Triac, MLV, ELV, 0-10V, & PWM Dimmers
- Flicker-free dimming
- Cooling by free air convection
- Full protection metal case
- Auto reset breakers, from short circuit, overloading, & over temperature
- Suitable for Dry locations
- 5 year Warranty




Technical Information


MODEL		PS-010V-D-96-24-ENL	
ELECTRICAL	Voltage/ Frequency	120 - 277V AC @ 50/60Hz	
	Inrush Current	< 40A @ 230V	
	Power Factor	> 0.95 @ 220V*	
	Efficiency	0.90 @ 220V*	
	Max Input Current	1.2A @ 120V	
	Max Output Power	96W	
	Max Output Current	4.0A	
	Output Voltage	24V DC	
	Total Harmonic Distortion	< 12%*	
	Start Up Time	< 1S*	
	Minimum Load	60%	
	Dimming	Enlighted	
	0-10V Current Draw	2mA	
RATING	Environment	Dry IP20	
	Compliance	UL 8750	
	Ambient Operating Temperature Range	LTF	- 30 to 60°C
ENL		- 40 to 85°C	
DIMENSIONS	Length	A	14.40"
	Width	B	5.20"
	Height	C	2.60"
Net. Weight		3.8 lbs	

*At max load

General Wiring Diagram

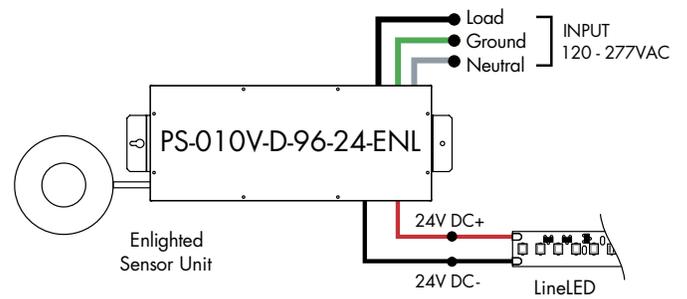

Dimensions

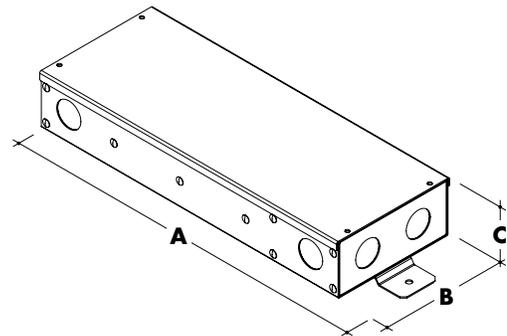

Ordering Code

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	OUTPUT CONTROL
PS - Power Supply, 120-277VAC	010V-0-10V Dimming (1%)	D - Dry	96-96 Watts	24 - 24 VDC	ENL-0-10V Enlightened