




Features

- Class 2 DALI controlled LED Driver features eldoLED's LINEARdrive
- Configurable Dali drivers rated at 96 watt each
- DALI-2 Compatible
- Suitable For Damp Location
- 5 year Warranty




Technical Information


MODEL			PS-DALI2-DT6-D-96-24
ELECTRICAL	Voltage/ Frequency		120-277V AC @ 50/60Hz
	Inrush Current		100A @ 277V
	Power Factor		> 0.94 @ 120~277V*
	Efficiency		0.90 @ 120V 0.92 @ 277V
	Max Input Current		1.00A @ 120V 0.44A @ 277V
	Max Output Power		96W
	Max Output Current		4.0A
	Output Voltage		24V DC
	Total Harmonic Distortion		< 20%*
	Start Up Time		< 0.5S*
	Minimum Load		10%
	Dimming (DALI)		0.1% - 100% LOG
RATING	Environment		Damp IP44
	Compliance		UL 8750
	Ambient Operating Temperature Range		- 20 to 50°C
DIMENSIONS	Length	A	14.40"
	Width	B	5.20"
	Height	C	2.60"
Net. Weight			3.8 lbs

*At max load

General Wiring Diagram

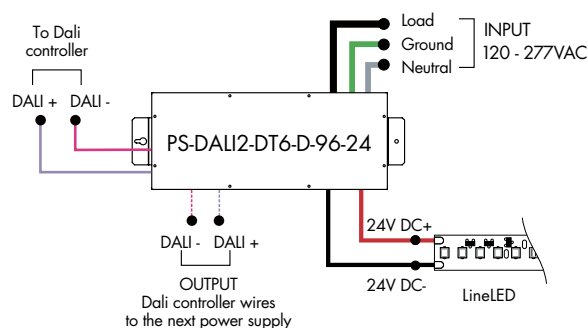

Dimensions

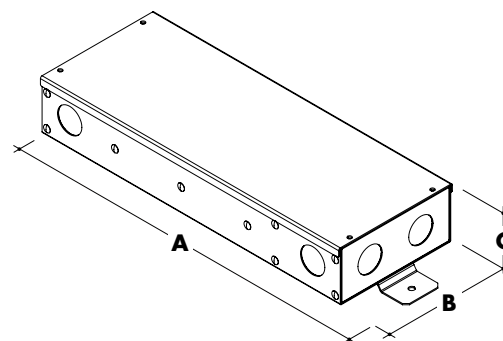

Ordering Code

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DALI2-DT6-DALI2 DT6 (0.1%)	D-Dry	96-96 Watts	24-24 VDC