




Features

- The Class 2 DMX LED Driver is specifically designed to work with RGBW LineLED or modules and controls 96 watt using standard DMX512.
- Features eldoLED's LINEARdrive configurable dimmable DMX drivers. Intuitive user interface allows configuration of the number of channels
- DMX settings for network mode and show, color and dim values for standalone operation.
- Suitable For Damp Location
- RDM enabled for fast setup and remote addressing (remote device management)
- 5 year Warranty



CLASS 2
TYPE HL


Declare

Technical Information


MODEL			PS-DMX-D-96-24
ELECTRICAL	Voltage/ Frequency		120-277V AC @ 50/60Hz
	Inrush Current		100A @ 277V
	Power Factor		> 0.94 @ 120~277V*
	Efficiency		0.90 @ 120V 0.92 @ 277V
	Max Input Current		1.00A @ 120V 0.44A @ 277V
	Max Output Power		96W
	Max Output Current		4.0A
	Output Voltage		24V DC
	Total Harmonic Distortion		< 20%*
	Start Up Time		< 0.5S*
	Minimum Load		10%
	Dimming (DMX)		0.1% - 100%
RATING	Environment		Damp IP44
	Compliance		UL 8750
	Ambient Operating Temperature Range		-20 to 50°C
DIMENSIONS	Length	A	14.40"
	Width	B	5.20"
	Height	C	2.60"
Net. Weight			3.8 lbs

*At max load

General Wiring Diagram

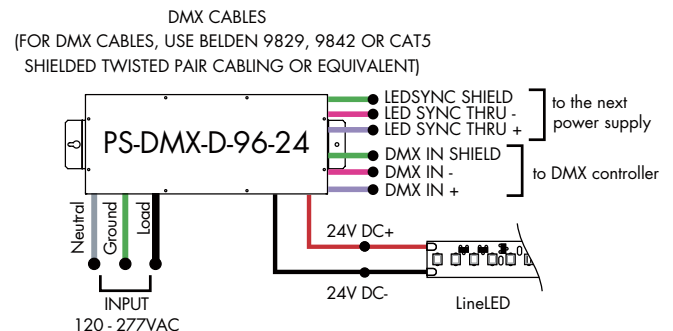

Dimensions

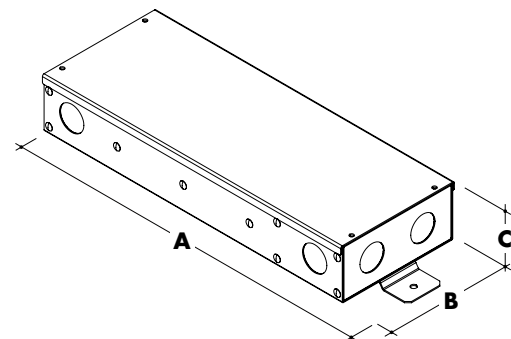

Ordering Code

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DMX - DMX (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC