

KEY FEATURES

- Beam Options: 12 | 30 | 60
- Light Engine Performance: 164lm | 2.24W
- Movement: 360 Pan | 180 Tilt
- Tool-less field changeable optics
- Works with our Minipoint system
- Fully lockable in Pan & Tilt
- UK Part L1 / L2 (Display) Compliant



OVERVIEW

Pico Jack is a Constant Current single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium. It has three site-changeable optics for flexible beam distribution and is fully adjustable with lockable 360° pan and 180° tilt. Our 164lm | 2.24W light engine has a max peak intensity of 1566cd. There are 3 snoot options, Short, Long and the Plus Accessory Holder. The luminaire is compatible with our Minipoint system that enables a plug and play setup where luminaires can be swapped to suit changing lighting requirements.

PERFORMANCE

	Standard		
	Narrow	Medium	Flood
FWHM	12°	30°	60°
Luminous Flux	164 lm	150 lm	163 lm
Peak Intensity	1566 cd	470 cd	163 cd
CCT	2700K 3000K		
CRI Min.	95 95		
LED Current	0.700 A		
Voltage	3.2 V		
Input Wattage	2.24 W		
Efficacy	73.2 lm/W		
Driver Type	Constant Current Remote		
Class	SELV Class III		

ORDER CODE

Model	Type	Shape	Output	CCT	Beam Angle	Finish
PIC Pico	MI Minipoint Jack ¹	SN Short Snoot	SO Standard Output	27K 2700K	NR Narrow 12°	WH White
	NMI w/Node Minipoint	LN Long Snoot		30K 3000K	ME Medium 30°	BK Black
	SMI w/Surface Minipoint	AH Accessory Holder			WD Wide 60°	AL Br. Aluminium
						RBZ Rubbed Bronze
						BR Br. Brass
						PB Polished Brass

Example code: PIC-MI-SN-SO-27K-NR-WH

¹ MI type requires separate minipoint mounting point to be ordered
See Drivers, Power Supplies and Accessories sections for further order codes

LIGHT ENGINE SELECTION

This product is available with a single static white light engine option outlined below.

STANDARD
OUTPUT

Our standard output light engines embody Precision's commitment to excellence, delivering high CRI, efficient performance, and clean, well-defined beams.

- High CRI
- Crisp clean beams


LIFETIME & ENVIRONMENTAL

At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

CIBSE TM65	7.74 Kg/CO2e
CIBSE TM66	2.4
RoHS Compliance	Yes
REACH Compliance	Yes
WEEE Compliance	Yes - Registered Producer
Declare	Declared
Lifetime	L90B10 100,000hrs
Warranty	5 Years

UK PART L	
Part L1A / L1B (Dwellings)	Compliant 164 lm/W ≥75 lm/W source lumens Source lm (367 lm) / Source W (2.24 W)
Part L2A (General)	- ≥95lm/W delivered lumens
Part L2A (Display)	Compliant 164 lm/W ≥80 lm/W source lumens Source lm (367 lm) / Source W (2.24 W)

DIMENSIONS

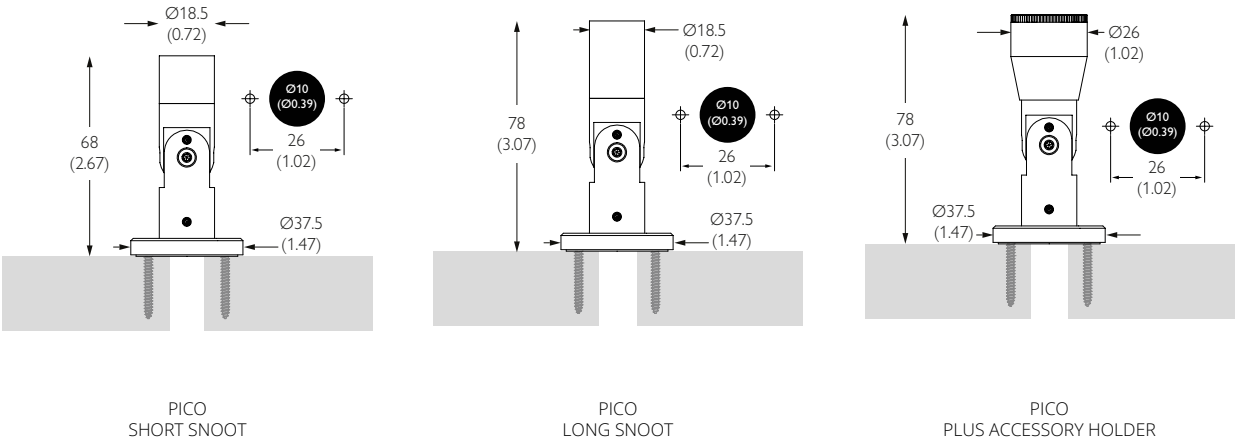

MECHANICAL

Location	IP20 Indoor Dry Location Only	Cutout	ø18mm (0.71") minipoint
Mounting	Minipoints	Ceiling Thickness	30mm (1.18") max
Adjustability	360 Pan 180 Tilt	Product Class	SELV Class III
Lockable	Pan & Tilt	Material	Machined AL 6063-T6
Accessories	Snoots	Weight	67g 0.15lb

FINISHES



20W | 0-10V | Remote | Constant Current

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 to 8 in series	mm	160	41	30
Order Code	PSCC-20-700-A-EL	in	6.3	1.61	1.18

20W | DALI-2 | Remote | Constant Current


Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 to 8 in series	mm	160	41	30
Order Code	PSCC-20-700-D-EL	in	6.3	1.61	1.18

30W | 0-10V | Remote | Constant Current


Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')

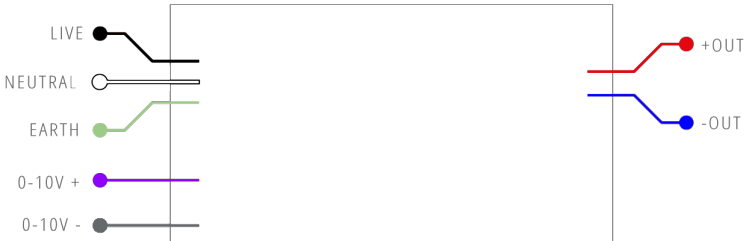

	All CCT's		L	W	H
Max. Lights	1 to 12 in series	mm	348	65	47
Order Code	USCC-30-700-A-EL-ENC	in	13.7	2.56	1.85

30W | DALI-2 | Remote | Constant Current

Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')

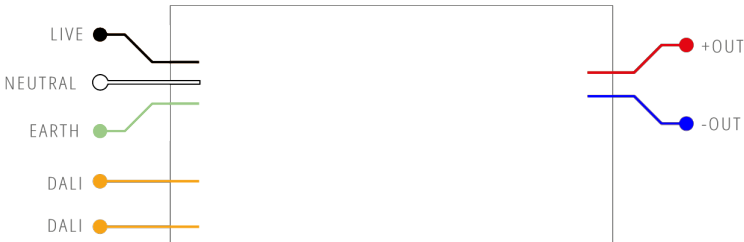

	All CCT's		L	W	H
Max. Lights	1 to 12 in series	mm	348	65	47
Order Code	USCC-30-700-D-EL-ENC	in	13.7	2.56	1.85

OUTPUT SCALING

CCT	Output Multiplier	CRI	R9 Typ.	TM-30: Rf	TM-30: Rg	Max Lm
2400K	-	-	-	-	-	-
2700K	1.00	95	65	90	98	164
3000K	1.00	95	65	90	99	164
3500K	-	-	-	-	-	-
4000K	-	-	-	-	-	-

Colour Consistency: 3 SDCM

PHOTOMETRY

NARROW

FWHM	12°
Delivered Flux	164 lm
Peak Intensity	1566 cd

Cd: 0	90°
267	80°
533	70°
800	60°
1067	50°
1333	40°
1600	
	10° 20° 30° 40°

0.21m	1566lx	174fc	0.6'
1m			3'
0.42m	392lx	44fc	1.3'
2m			6'
0.63m	174lx	19fc	1.9'
3m			9'
0.84m	98lx	11fc	2.5'
4m			12'
1.05m	63lx	7fc	3.2'
5m			15'
		5fc	3.8'
			18'

MEDIUM

FWHM	30°
Delivered Flux	150 lm
Peak Intensity	470 cd

Cd: 0	90°
83	80°
167	70°
250	60°
333	50°
417	40°
500	
	10° 20° 30° 40°

0.54m	470lx	52fc	1.6'
1m			3'
1.07m	118lx	13fc	3.2'
2m			6'
1.61m	52lx	6fc	4.8'
3m			9'
2.14m	29lx	3fc	6.4'
4m			12'
2.68m	19lx	2fc	8.0'
5m			15'
		1fc	9.6'
			18'

FLOOD

FWHM	60°
Delivered Flux	163 lm
Peak Intensity	163 cd

Cd: 0	90°
33	80°
67	70°
100	60°
133	50°
167	40°
200	
	10° 20° 30° 40°

1.15m	163lx	18fc	3.5'
1m			3'
2.31m	41lx	5fc	6.9'
2m			6'
3.46m	18lx	2fc	10.4'
3m			9'
4.62m	10lx	1fc	13.9'
4m			12'
5.77m	7lx	1fc	17.3'
5m			15'
		1fc	20.8'


OPTICS

There are 3 interchangeable optics

Optic	Optic	Optic
		
Narrow TIR Optic FWHM 12 deg Order Code 701-12	Medium TIR Optic FWHM 30 deg Order Code 701-30	Wide TIR Optic FWHM 60 deg Order Code 701-60

ACCESSORIES

This product requires the Pico Plus Accessory Holder to carry accessories. Accessories are pre-installed unless otherwise requested.

Colour Change

1/4 CTO W20xH1.8mm W0.79xH0.07" Order Code 997-1/4CTO-20

MINIPOINT JACK SYSTEM


MOUNTING OPTIONS

MOUNTING OPTIONS

NODE MINIPOINT

For mounting into cabinetry

MINIPOINT CODE	FINISH
770-M-A-DC-AL	Brushed Aluminium
770-M-A-DC-WH	White RAL 9010
770-M-A-DC-EBA	Black RAL 9005
770-M-A-DC-AL	Rubbed Bronze
770-M-A-DC-AL	Polished Brass
770-M-A-DC-AL	Brushed Brass

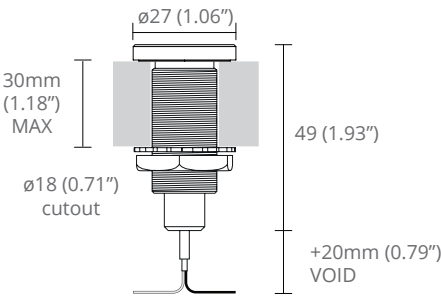

MINIPOINT PLUG

For closing an open circuit / unused minipoint

MINIPOINT CODE	FINISH
770-BPA-AL	Brushed Aluminium
770-BPA-WH	White RAL 9010
770-BPA-EBA	Black RAL 9005
770-BPA-RB	Rubbed Bronze
770-BPA-PB	Polished Brass
770-BPA-SB	Brushed Brass

