


Plexineon Rings

Catenary Mount

RGB, RGBW and RGBW Pixel



- For interior and exterior accent lighting
- Neon look providing a clear line of light visible for miles
- Includes Turnbuckles, Collar, Mounting Frame, Mounting Clips, and other hardware necessary to assemble to Catenary Cable
- Catenary Cable, Poles, Cable Eyes, and other Cable support hardware by others
- Operating Temperature: -40° F to 140° F (-40° C to 60° C)
- 24VDC Class 2
- IK10 and 3G rated
- IP67 rated
- 3 year warranty outdoor

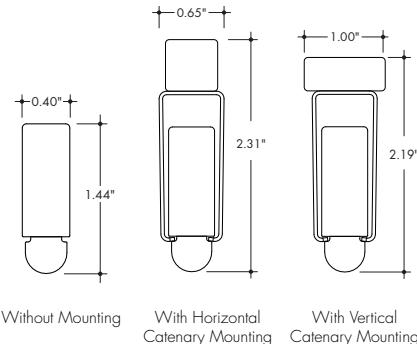

Technical Information

RING OUTER DIAMETER* (inch)		Plexineon RGB	Plexineon RGBW	Plexineon Pixel RGBW
EFFICACY		17.5 lm/W	17.1 lm/W	14.7 lm/W
Ø36 (Ø3ft)	Lumen Output	679 lm	792 lm	792 lm
	Power Consumption	38.6 W	46.2 W	53.7 W
Ø72 (Ø6ft)	Lumen Output	1357 lm	1583 lm	1583 lm
	Power Consumption	77.2 W	92.3 W	107.4 W
Ø144 (Ø12ft)	Lumen Output	2714 lm	3166 lm	3166 lm
	Power Consumption	154.6 W	184.7 W	214.9 W
Ø288 (Ø24)	Lumen Output	5429 lm	6333 lm	6333 lm
	Power Consumption	309.1 W	369.5 W	429.8 W

All channels full on.

*Rings will be made of equal sections no longer than 96" arc length. Rings exceeding 96W will have allowances for additional power feeds.

Ordering Code

MODEL	RING DIAMETER ²	RING TYPE	CCT	OUTPUT	LENS	MOUNTING	FINISH	POWERFEED POSITION/TYPE
PX-Plexineon ¹	—Ring outer diameter in inches, 6"-144" (12ft)	HR-Horizontal Ring VR-Vertical Ring ³	RGB-RGB RGBW-RGBW (3000K) RGBW-PXSPI-RGBW Pixel Control (3000K)	SO-Standard	F-Frosted	CD-Catenary Mount, Decorative Clips ⁴	GG-Gloss Grey BK-Matte Black GY-Matte Grey WH-Matte White	B-4-Plug Quick Connect one end, Receptacle Quick Connect other end

1. Standard lead time 8 weeks.

2. Rings will be made of equal sections no longer than 96" arc length. Tolerance on size of diameter is +/- 1".

4. Catenary Mount fixtures include a fixture mounting frame and all mounting components necessary to attach to Catenary Cable (by others). 2 mounting clips included for every 12" of diameter, with a minimum of 3 clips. Mounting frames over dia48" are ship in multiple pieces and are assembled on site. Decorative Clips match the fixture finish.

Plexineon Rings

Catenary Mount

RGB, RGBW and RGBW Pixel



ilight
by luminii

Finish Options

BK

Matte Black Finish



WH

Matte White Finish



GY

Matte Grey Finish



GG


Gloss Grey Finish



Mounting Components


CD

Catenary Mount, Decorative Clip



Thinner clip with finish options to match fixtures

Mounting Frame



Mounting clips are riveted at the factory to the Mounting Frame. Finish matches Ordering Code Finish selected


Mounting Frame Joiner



Assembles Mounting Frame together for runs over 96" (8ft)

80-HSH01-000-XX


Horizontal Catenary Strut Hanger



Able to adjust up to 2.5" vertically

35-CVC-003-XX

Vertical Catenary Collar Assembly




Able to adjust up to 2.5" vertically

0X	Clip Finish
01	Matte Black
02	Matte Grey
03	Matte White

Additional Material

70-TOL02-001-01

Mounting Clip Installation Tool

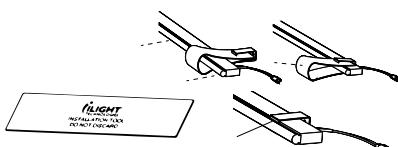

Use for installation of Plexineon into Mounting Clips

Plexineon Rings

Catenary Mount


RGB, RGBW and RGBW Pixel



Powerfeed and Connectors

- Quick Connectors with 6" flying leads are included in the Plexineon runs per CCT option selected. Order extras as desired.
- Pixel data direction travels from Plug to Receptacle

For use with RGB

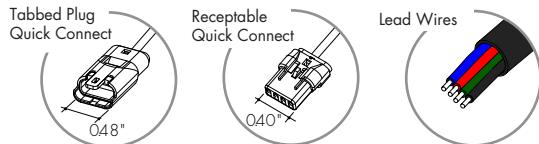

60-SJ-C4-0001-01

iLight TABBED PLUG Quick Connect with 6" flying leads, 4-conductor, Black




Also available with longer Flying Leads

60-SJ-C4-0003-01 120" flying leads

60-SJ-C4-0002-01

iLight RECEPTABLE Quick Connect with 6" flying leads, 4-conductor, Black




Also available with longer Flying Leads

60-SJ-C4-0004-01 120" flying leads

60-SJ-C4-JMP-12-01

iLight Plug-Receptacle Quick Connect 12" Jumper, 4-conductor, Black silicone jacket




Also available with longer wires

60-SJ-C4-JMP-48-01 48" jumper


60-SJ-C4-JMP-120-01 120" jumper

For use with RGBW

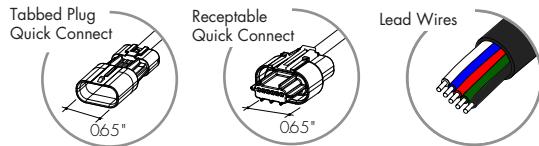

60-SJ-C5-0001-01

iLight TABBED PLUG Quick Connect with 6" flying leads, 5-conductor, Black




Also available with longer Flying Leads

60-SJ-C5-0003-01 120" flying leads

60-SJ-C5-0002-01

iLight RECEPTABLE Quick Connect with 6" flying leads, 5-conductor, Black




Also available with longer Flying Leads

60-SJ-C5-0004-01 120" flying leads

60-SJ-C5-JMP-12-01

iLight Plug-Receptacle Quick Connect 12" Jumper, 5-conductor, Black silicone jacket




Also available with longer wires

60-SJ-C5-JMP-48-01 48" jumper


60-SJ-C5-JMP-120-01 120" jumper

For use with Pixel

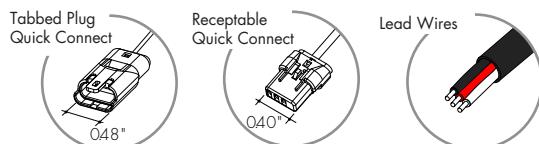

60-SJ-C3-0001-01

iLight TABBED PLUG Quick Connect with 6" flying leads, 3-conductor, Black




Also available with longer Flying Leads

60-SJ-C3-0005-01 384" flying leads

60-SJ-C3-0007-01 120" flying leads

60-SJ-C3-0002-01

iLight RECEPTABLE Quick Connect with 6" flying leads, 3-conductor, Black




Also available with longer Flying Leads

60-SJ-C3-0006-01 384" flying leads

60-SJ-C3-0008-01 120" flying leads

60-SJ-C3-JMP-12-01

iLight Plug-Receptacle Quick Connect 12" Jumper, 3-conductor, Black silicone jacket



Also available with longer wires

60-SJ-C3-JMP-48-01 48" jumper

60-SJ-C3-JMP-120-01 120" jumper

Plexineon Rings

Catenary Mount


RGB, RGBW and RGBW Pixel



ilight
by luminii


Ring Types

HR
Horizontal Ring

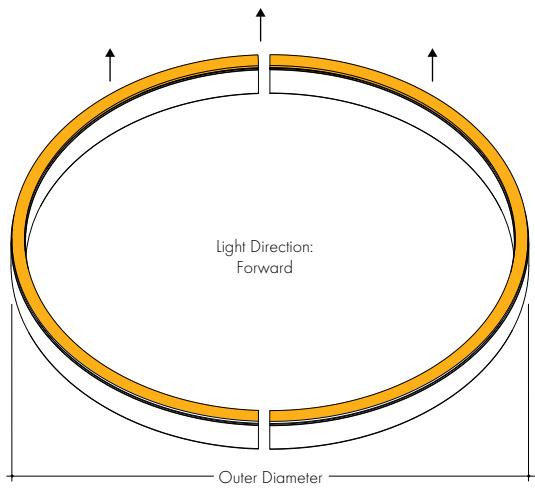

(Use this dimension for Ordering Code)

VR
Vertical Ring

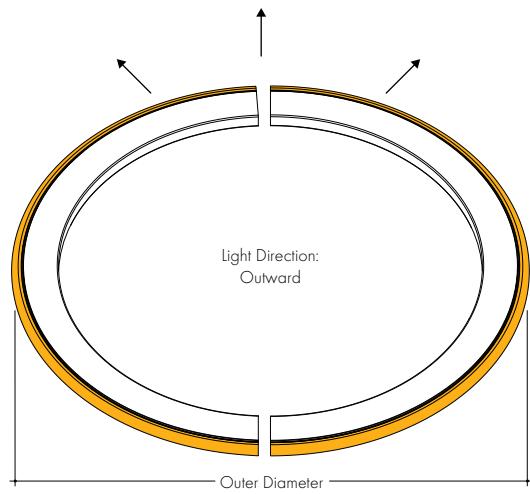

(Use this dimension for Ordering Code)

Plexineon Rings

Catenary Mount


RGB, RGBW and RGBW Pixel

ilight
by luminii




Sample Layout

- Note (Pixel Only): Pixel direction will be shown with a label on the side of the fixture. Pixel data direction travels from Plug to Receptacle



PX-72-HR-RGBW-PXSPI-SO-F-CD-GG-B-4


Plexineon Horizontal Ring, Catenary Mount, Decorative Clips

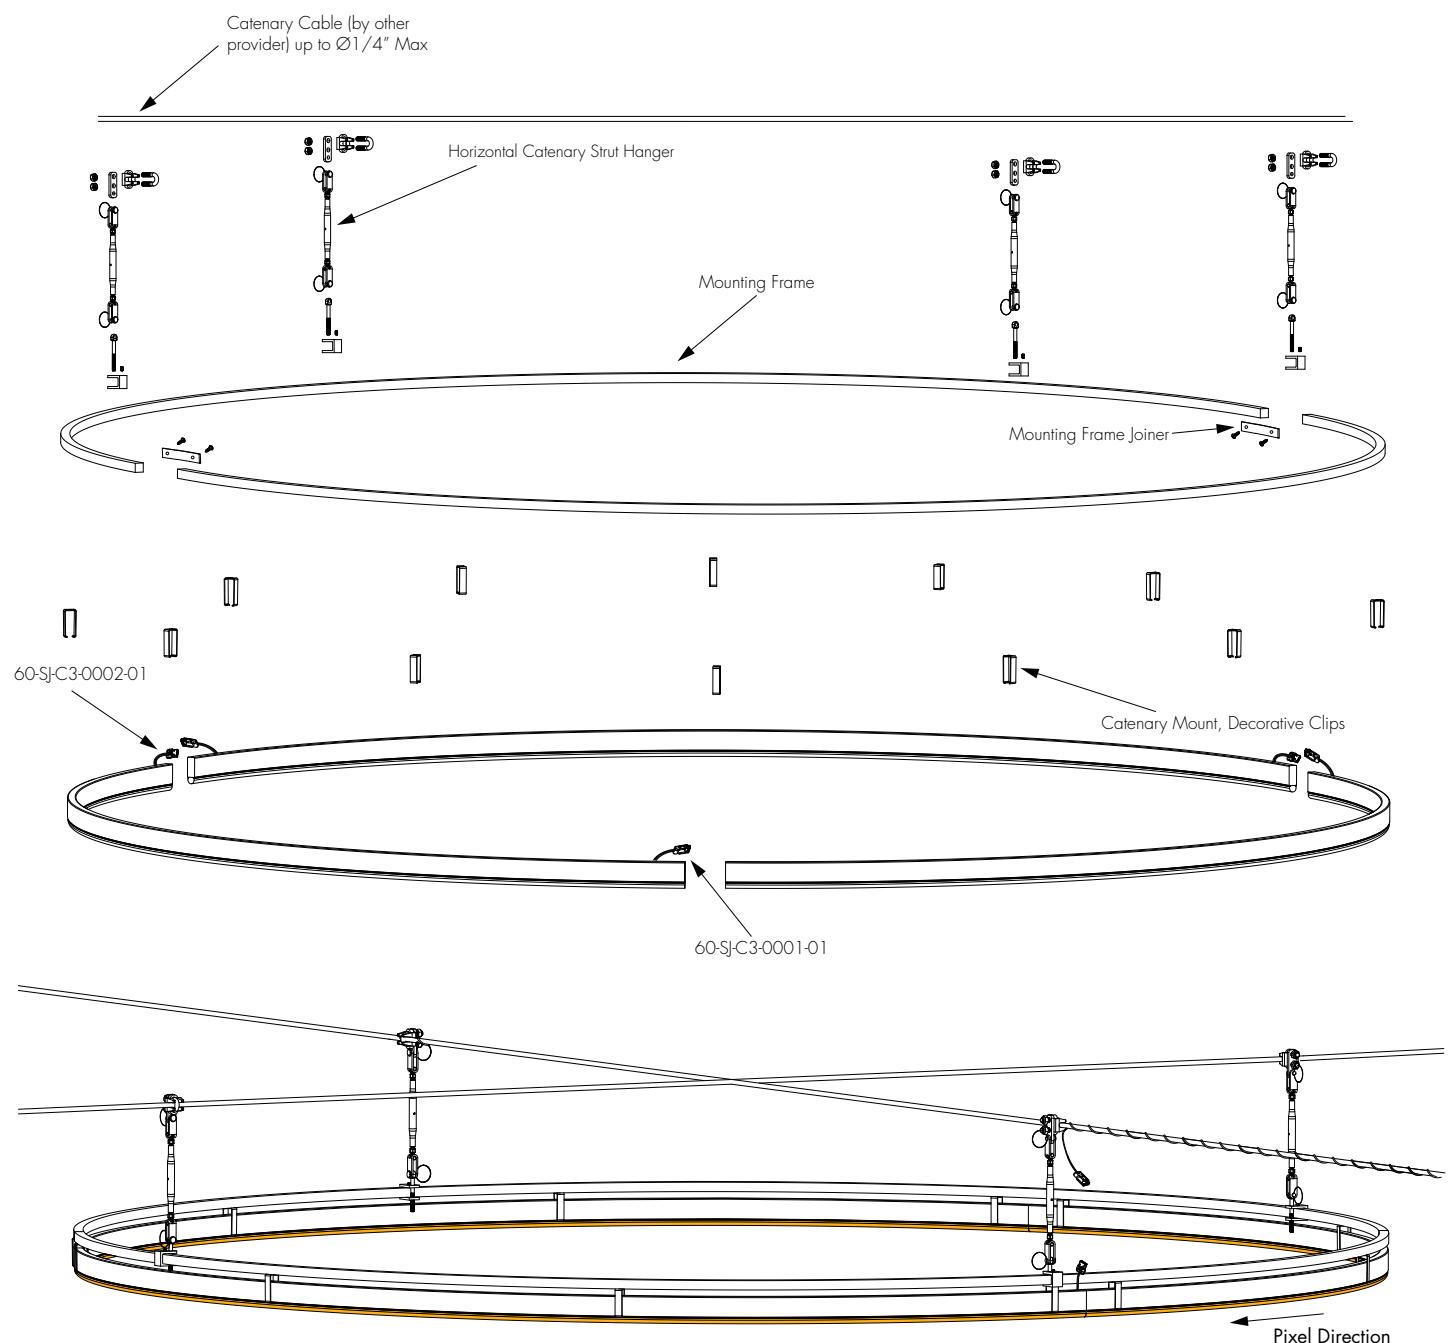




Sample Layout

- Horizontal Ring

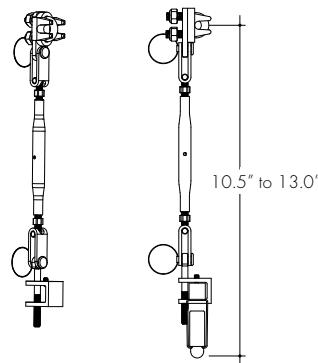

Dimensions for Turnbuckle show Cable to illuminated surface of Plexineon. Turnbuckle provides 2.5" vertical adjustability from 10.5" for 13.0" for leveling.

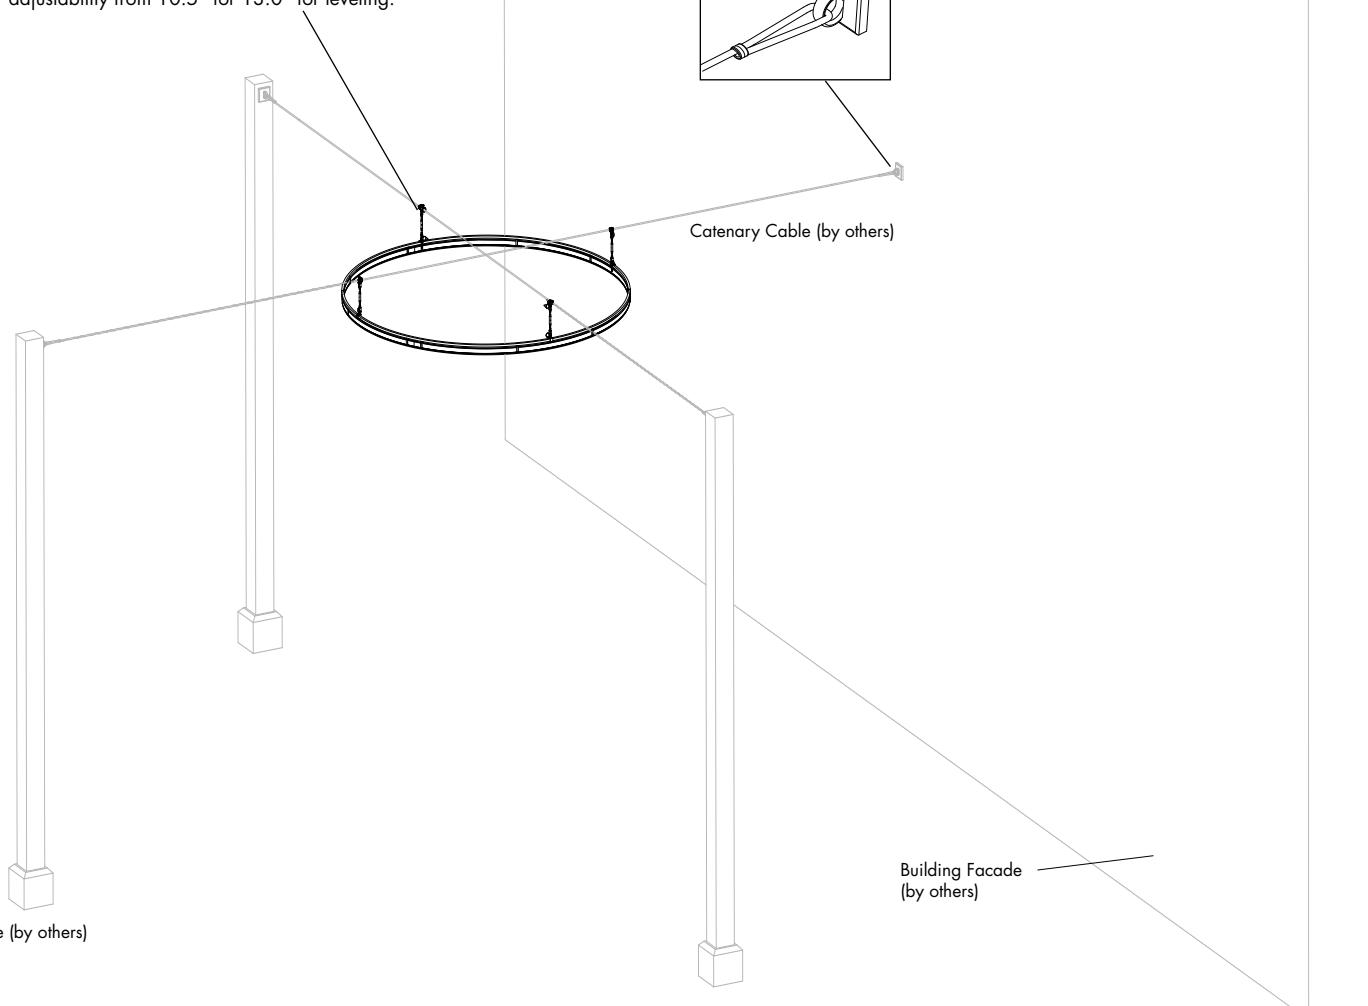

Plexineon Rings

Catenary Mount

RGB, RGBW and RGBW Pixel

ilight
by luminii




Sample Layout

- Note (Pixel Only): Pixel direction will be shown with a label on the side of the fixture. Pixel data direction travels from Plug to Receptacle



PX-36-VR-RGBW-PXSPI-SO-F-CD-GG-B-4

Plexineon Vertical Ring, Catenary Mount, Decorative Clips

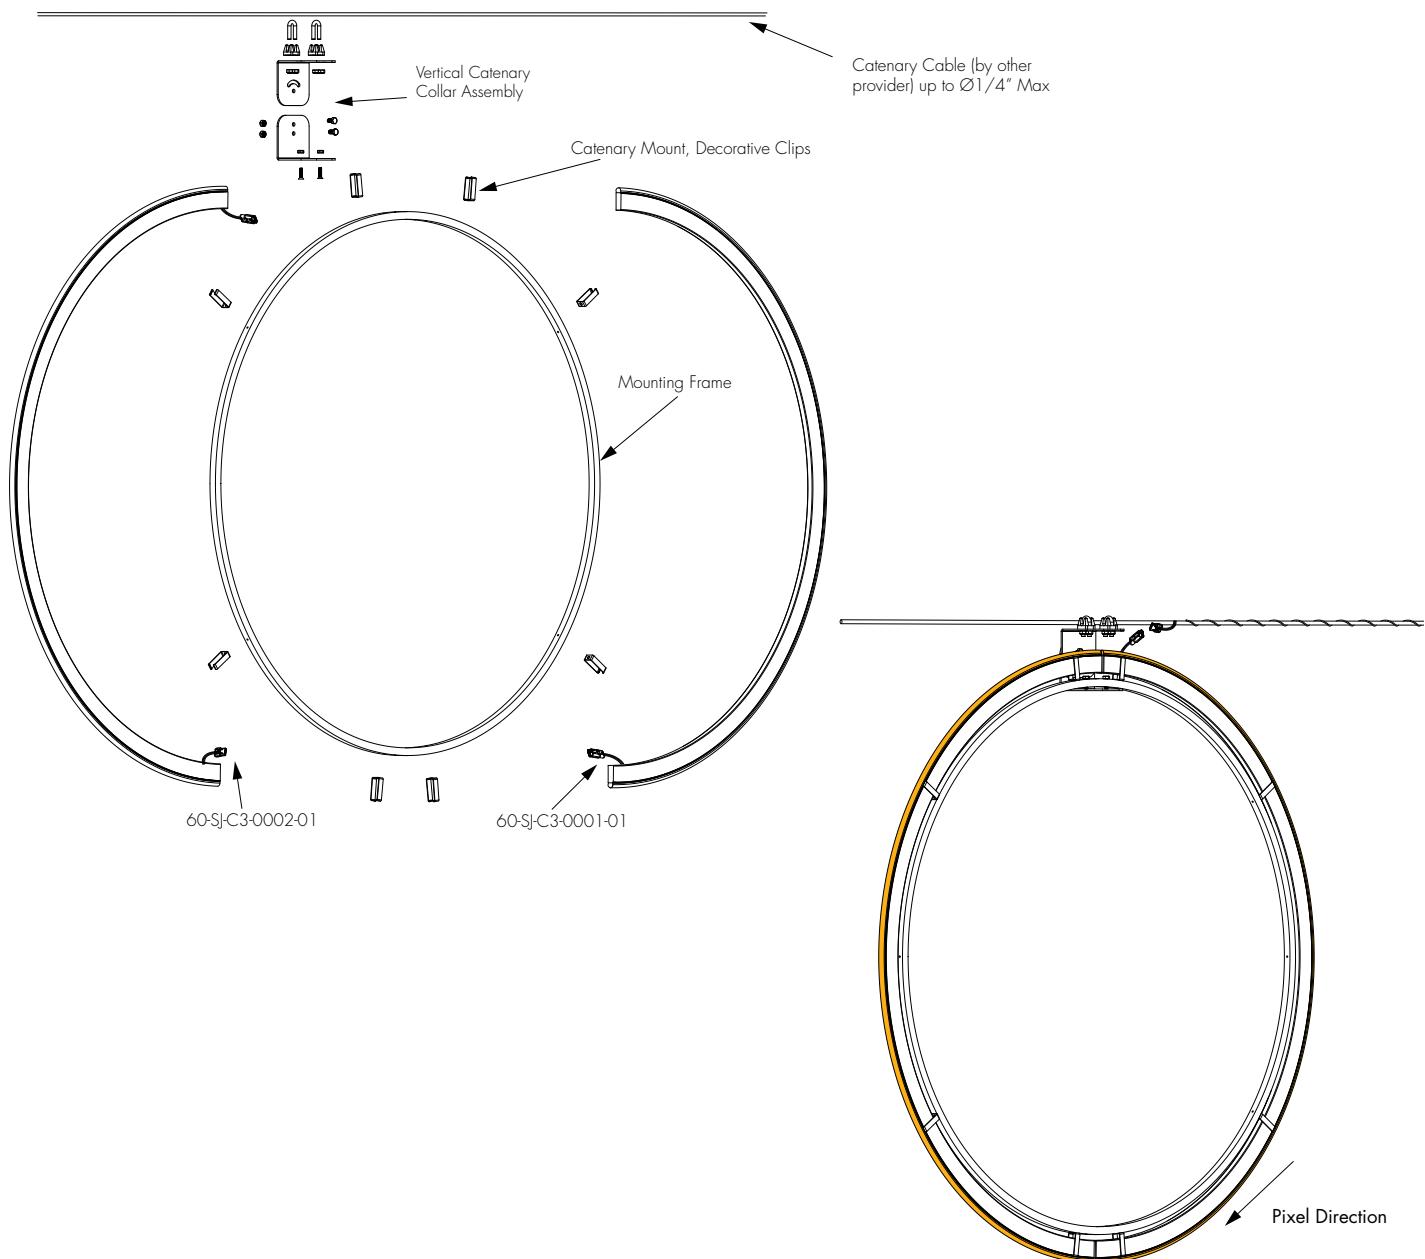

Plexineon Rings

Catenary Mount

RGB, RGBW and RGBW Pixel





ilight
by luminii


Sample Layout

- Vertical Ring


Collar provides up to 45° angular adjustability.
1 Collar per each plexineon vertical ring.

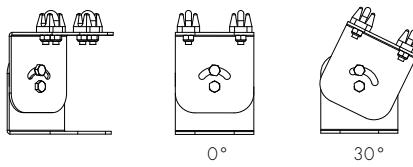

Cable Eye (by others)



Catenary Cable (by others)

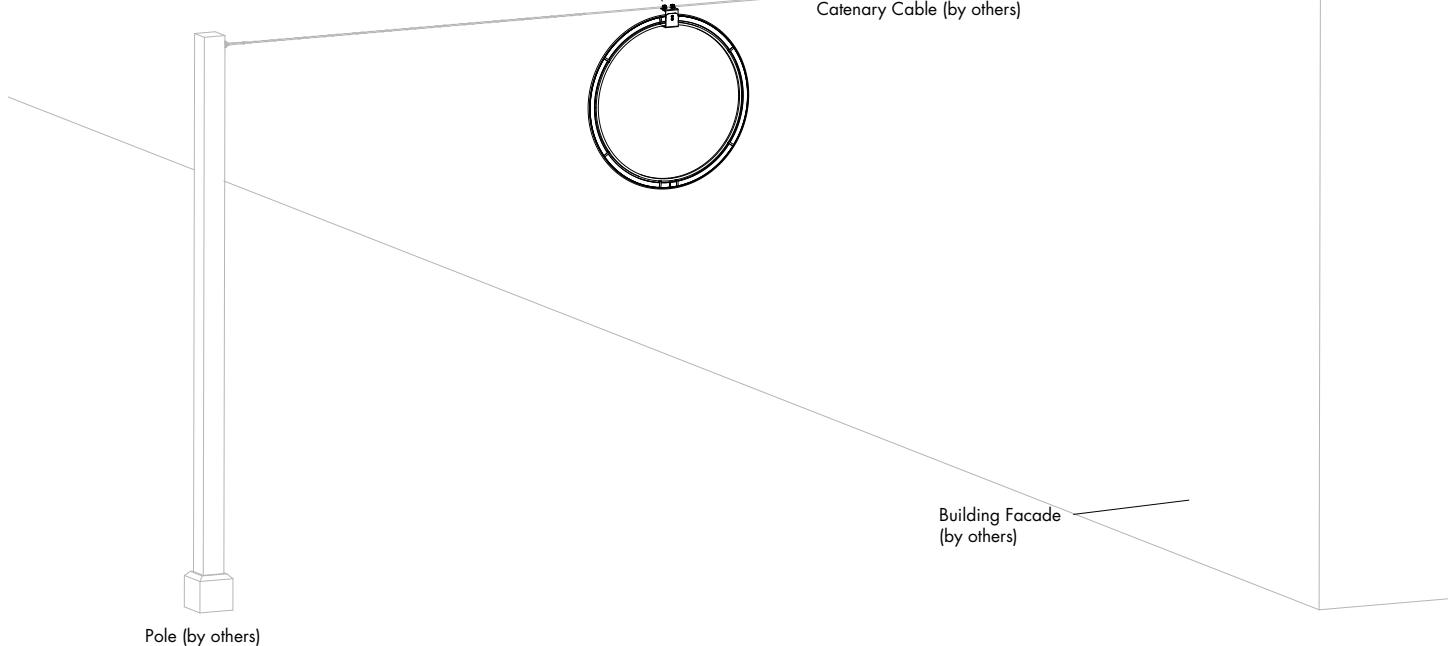

Plexineon Rings

Catenary Mount

RGB, RGBW and RGBW Pixel



ilight
by luminii

Power Consumption

Tested at Full Power with PS-UNI Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

RGB

Nominal Diameter (in)	Watts	Nominal Length (in)	Watts
12	12.8	217	236.8
24	26.2	222	242.4
36	39	227	246.4
48	52.4	232	252.8
60	64.4	237	257.6
72	78.6	242	257.6
84	90.9	244	266.4
96	104.8	250	272.7
156	170.4	256	277.2
159	173.4	261	284.4
163	177.6	267	289.8
167	181.8	273	289.8
171	184.8	272	296
174	189.6	278	303
178	193.2	284	308
182	193.2		
181	198.8		
186	202.3		
190	207.2		
195	212.1		
199	215.6		
203	221.2		
208	225.4		
212	225.4		

RGBW

Nominal Length (in)	Watts
12	17.1
24	34.6
36	51.8
48	69.2
72	103.8
84	116.1
96	138.4
120	173
159	224.4
167	232.2
174	242.4
182	253.2
177	250.6
186	261.8
195	270.9
203	282.8
212	295.4
222	309.6
232	323.2
242	337.6
239	336.6
250	348.3
261	363.6
273	379.8
265	374
278	387

PIXEL

Nominal Length (in)	Watts	Pixel Qty
12	17.5	9
24	36.2	19
36	53.8	28
48	72.4	38
72	108.6	57
84	125.1	66
96	144.8	76
120	181	95
159	240	126
167	250.2	132
174	261.6	138
182	271.2	144
177	266.7	140
186	280	147
195	291.9	154
203	305.2	161
212	316.4	168
222	333.6	176
232	348.8	184
242	361.6	192
239	360	189
250	375.3	198
261	392.4	207
273	406.8	216
265	400	210
278	417	220



Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Maximum Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

Plexineon Rings

Catenary Mount

RGB, RGBW and RGBW Pixel



ilight
by luminii

Common Applications

Custom Indoor Designs | Coves | Signs | Building Facades | Lobbies | Hallways | Statement Pieces | Restaurants

Corporate Offices | Schools | Residential Towers | Parking Garages | Hotels | Bridges | Benches | Airports



Plexineon Rings

Catenary Mount

RGB, RGBW and RGBW Pixel

ilight
by luminii




Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

For use with RGB/RGBW


Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)	30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

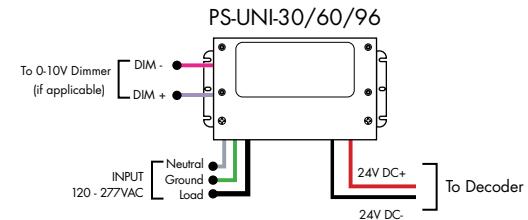

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

REQUIRES A CONTROLLER AND A DECODER TO WORK PROPERLY

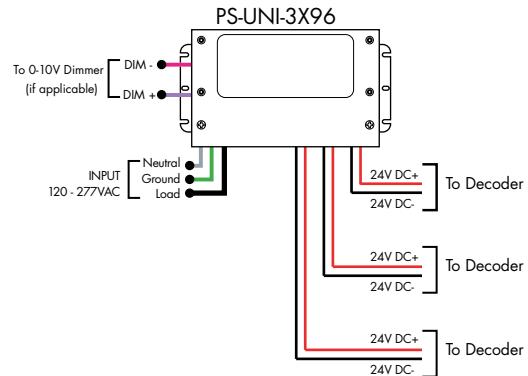


For use with RGB/RGBW


Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DMX - DMX (0.1%)	D-Dry	96-96 Watts 3X96 - 3X96 Watts	24-24 VDC

DMX CABLES
(FOR DMX CABLES, USE BELDEN 9829, 9842 OR CAT5 SHIELDED TWISTED PAIR CABLING OR EQUIVALENT)

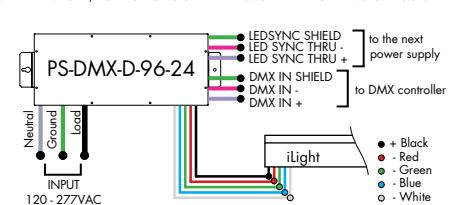

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

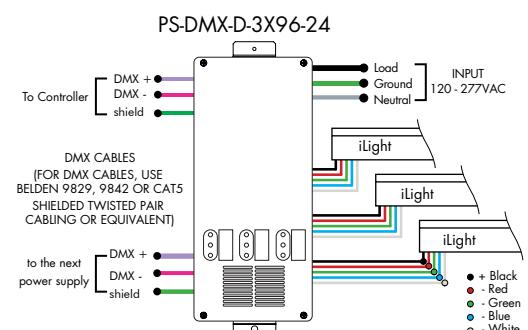

Plexineon Rings

Catenary Mount

RGB, RGBW and RGBW Pixel



ilight
by luminii


Power Supplies

See fixture and power supply instructions & spec sheet for wiring information. Dimming possible in select models - view Luminii website for list of compatible dimmers.

For use with RGB/RGBW/Pixel

Ordering Code - Non-Dimming Power Supply 120VAC - 277VAC


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - PSV Series	ND - Non Dimming	D - Dry	96 - 96 Watts	24 - 24 VDC

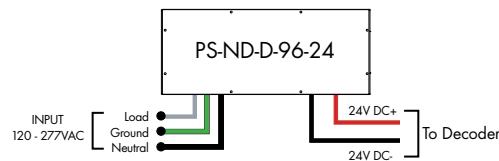

REQUIRES A CONTROLLER AND A DECODER TO WORK PROPERLY

Controllers and Decoders

For use with RGB/RGBW Power Supplies

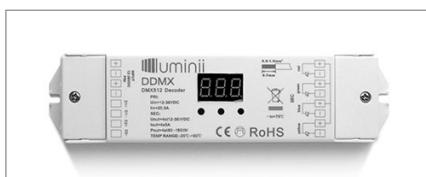

ORDERING CODE

MODEL
DDMX-RGBW

DDMX-RGBW - DMX decoder

Translates controller DMX512 programs for RGB and white LED strips.

Unique DMX address for the decoder can be set easily and displayed by the numeric display on the case. Changing and resetting the DMX address requires manual input.

Use power repeater to expand output.

Operating Voltage

12-36 VDC

Power Capacity

up to 96W at 24V

Operating Temperature Range

from -4°F to +122°F in case



ORDERING CODE

MODEL
RGBW-RC-R

RGBW-RC-R - RGBW receiver

The RGBW receiver is easily paired with controller by the click of a button. Receiver can be reset to factory settings at any time.

Each receiver can store one static RGB color, one color sequence, and one brightness setting for the white LED strip. Receivers assigned to the same scene within the same zone will have the same LED static color and color sequence.

Operating Voltage

12-36 VDC

Power Capacity

up to 96W at 24V

Operating Temperature Range

from -4°F to +122°F in case

Plexineon Rings

Catenary Mount

RGB, RGBW and RGBW Pixel



ilight
by luminii

Controllers and Decoders

For use with RGB/RGBW Power Supplies



ORDERING CODE

MODEL

RGBW-SR

RGBW-SR - RGBW signal repeater

Extends identical signal when connected in series to an RGBW LED control system. The RGBW signal repeater works with Luminii RGB and RGBW controllers, receivers, and decoders.

RGBW signal can be extended indefinitely when adequate power supply (not included) is connected to the system.

Operating Voltage

12-36 VDC

Operating Temperature Range

from -4°F to +122°F in case

Power Capacity

up to 96W at 24V



ORDERING CODE

MODEL

RGBW-MC3

RGBW-MC3 - 4-zone RGBW controller

Easy to operate wireless interface suitable for static or color changing scenes. Control 4 different color zones separately or at the same time. RGBW receiver (RGBW-RC-R) required for operation. Assign multiple receivers per zone to cover a large area.

Color wheel enables highly stable and sensitive color control functionality. Create your own color changing sequences with ease and flexibility.

Power

qty 3 AAA batteries

Scenes

up to 4 unique zones

Signal

Wireless (RF)

Energy Saving

Deactivates after 10 seconds of inactivity

Color Parameters

- Brightness
- Saturation
- Primary colors
- Speed of color changing sequence
- Fading



ORDERING CODE

MODEL

3Z - Three Zone

COLOR

DMX-DMX
Controller

1Z - One Zone

RGBW - Red, Green,
Blue, &
White

DMX /Wireless RGB-W wall-mount controller controls DMX lighting fixtures, wireless control of RGB-W lighting fixture or use both simultaneously. Fits in any standard US switch box. Includes all the outputs in the back of the controller.

Control brightness levels with a single touch, personalize and memorize 3 different scenes, and even create 3 variations of white.

Features

- 2 in 1 in-Wall Controller: DMX Control or Wireless RGB-W
- 65,000 Color Options, Dimming and Speed Control
- Memory Function
- 50 Foot Wireless Range
- Easily Fits Standard US Switch Boxes
- Touch Sensitive Glass Surface
- Includes 10 Built in Programs, or Create and Play Your Own

Operating Voltage

12 - 24V DC

Color Parameters

- Brightness
- Saturation
- Primary colors
- Fading
- Color changing speed

Plexineon Rings

Catenary Mount

RGB, RGBW and RGBW Pixel



ilight
by luminii

Controllers and Decoders

For use with RGB/RGBW, Pixel Power Supplies



ORDERING CODE

MODEL

TSMDMX-E

TSMDMX-E - Touchscreen DMX controller

Programmable advanced DMX512 lighting controller featuring a touch-screen interface. Operates as stand alone controller or integrated with most architectural lighting control systems. Can controller endless DMX512 enabled devices.

Mounts to standard single or dual gang wall box with the included power supply inside the junction box. Terminal block design for power and data connections.

Features

- Sleek glass design which sits 0.43" from the wall
- Graphical color display to show selected environment
- Color/dimmer/speed palette
- Color temperature mixing
- Touch sensitive buttons. No mechanical parts
- Touch sensitive wheel allows for accurate color selection
- Multi-zone microSD memory
- Multi-room control with 500 scenes, 10 zones
- 1024 DMX channels. Control 340 RGB fixtures
- USB & Ethernet connectivity for programming and control

Power Supply

7 VDC (included)

Programmability

PC, Mac, Tablet, Smartphone

Output Signal

DMX512 (1024 channels)

Color Parameters

- Brightness
- Saturation
- Speed of color changing sequence
- Fading / dimming / brightness

For use with RGB/RGBW Power Supplies



ORDERING CODE

MODEL

DALI2-DT8-RGBW

DALI2-DT8-RGBW - DALI-2 RGBW Decoder

A 4-channel DALI2 DT8 decoder designed to control RGB, RGBW, and TW LED fixtures, featuring adjustable color temperature and customizable lumen output.

Voltage/Frequency
12-36VDC

Ambient Operating Temperature Range
-20 to 50°C

Max Output Power
4 output channels, 60-180W each

Environment
Dry (IP20)

Max Output Current
4 output channels, max of 5A each



ORDERING CODE

MODEL

DDMX-5CH-RDM-PRO

DDMX-5CH-RDM-PRO - DMX512 Decoder

DMX512 decoder with RDM functionality features 5 PWM output channels with common anode. High PWM output frequency range allows the product to be used in HD video conferencing spaces. All DMX products to be installed per DMX512 Standard.

Power

96 Watt

PWM Output Resolution Ratio

8 or 16 bit

Inputs

RJ45, XLR-5Pin, Terminal Block

PWM Output Frequency

500Hz - 30KHz

DMX Channels

1 to 5 settable

Output Dimming Curve Gamma Value

0.1 ~ 9.9

Plexineon Rings

Catenary Mount

RGB, RGBW and RGBW Pixel



ilight
by luminii

Controllers and Decoders

For use with RGB/RGBW Power Supplies



ORDERING CODE

MODEL

RGBW-WI-R

RGBW-WI-R - WiFi generator

RGBW-WI-R creates a local network that enables any electronic device (phone, tablet, etc.) to control the RGB/W strip connected to a RGBW-RC-R receiver.

The control functions are achieved through a free application download for Android and iOS devices called REALCOLOR.

Operating Voltage

12-36 VDC

Power Supply

PI-130-24 (included)

Operating Temperature Range

from -4°F to +122°F in case

For use with Pixel Power Supplies



ORDERING CODE

MODEL

SR-DMX-SPI

SR-DMX-SPI - Smart Pixel Decoder

The SR-DMX-SPI is a smart LED pixel decoder that controls RGB/RGBW pixel LED strips with SPI signal. Designed with an OLED backlit panel, the pixel controller allows for easy configuration of most settings. Four push buttons are available for control of the LED functions.

*For pixel only.

Features

- 2 in 1 in-Wall Controller: DMX Control or Wireless RGB-W
- SPI signal output for RGB/RGBW pixel light control
- DMX512 controllable and RF/WIFI remote controllable
- Capable of addressing up to 1020 RGB pixels & 765 RGBW pixels
- OLED panel allows for easy configuration

Operating Voltage

12 - 36V DC

Power capacity

up to 96W at 24V

Operating temperature range

from -4°F to +122°F in case