

Installation Instructions - Plexineon Recessed Static Color

Models: Plexineon Fixture Recessed Mount Static Color

Please read all instructions prior to installation and keep for future reference!


1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT
3. 24 VOLTS DC
4. SUITABLE FOR WET LOCATIONS
5. RECESSED MOUNT ONLY



REVO.2
01272026

1 / 6

ilight
by luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

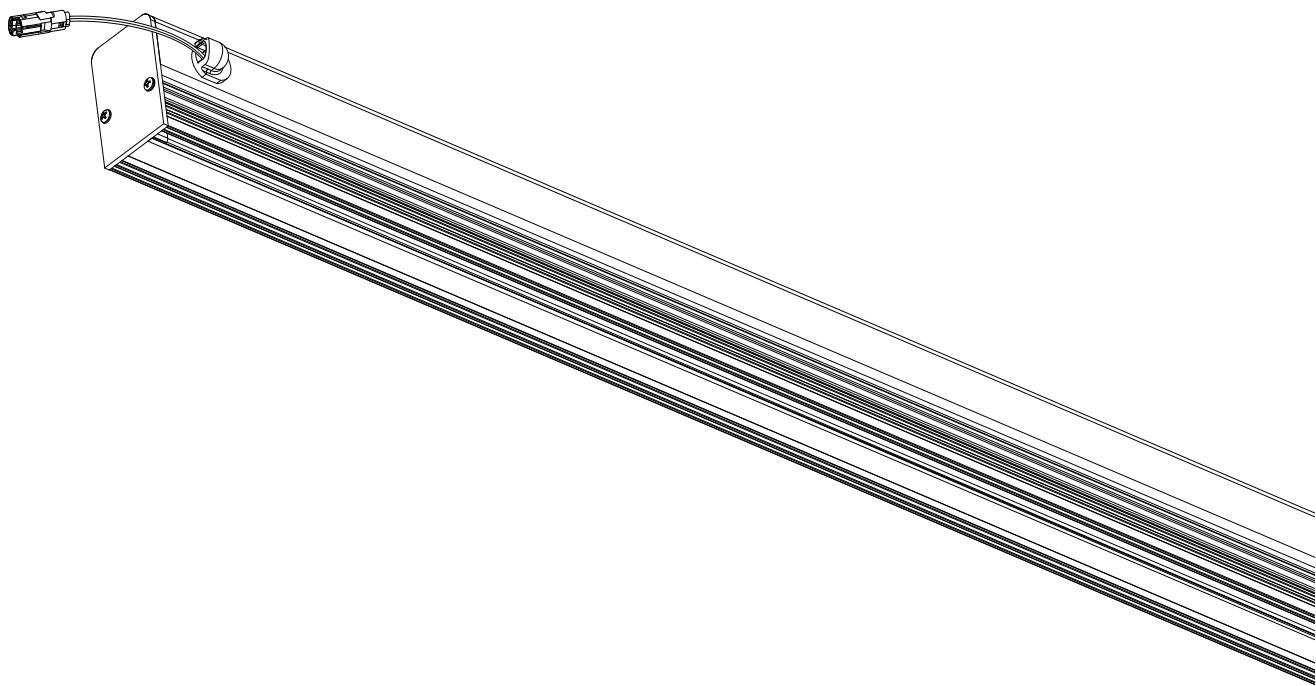

Installation Instructions - Plexineon Recessed Static Color

Models: Plexineon Fixture Recessed Mount Static Color

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT
3. 24 VOLTS DC
4. SUITABLE FOR WET LOCATIONS

5. RECESSED MOUNT ONLY



REVO.2
01272026


2 / 6

ilight
by luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

1

NOTE: Prior to installation all 24VDC wires must be present within 72" of the installation. Refer to the power supply installation instruction for additional information.

NOTE: More than one person is recommended for this installation.

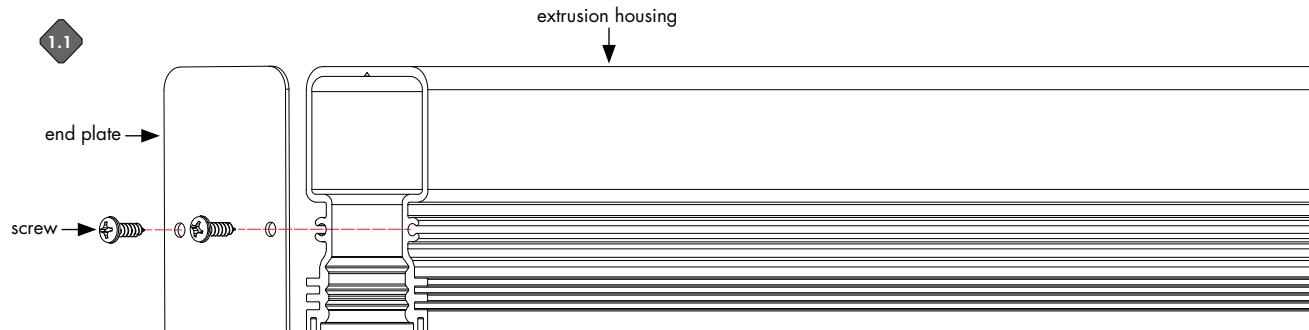


1.1 Screw end plate onto extrusion housing.

2

extrusion housing

extrusion housing

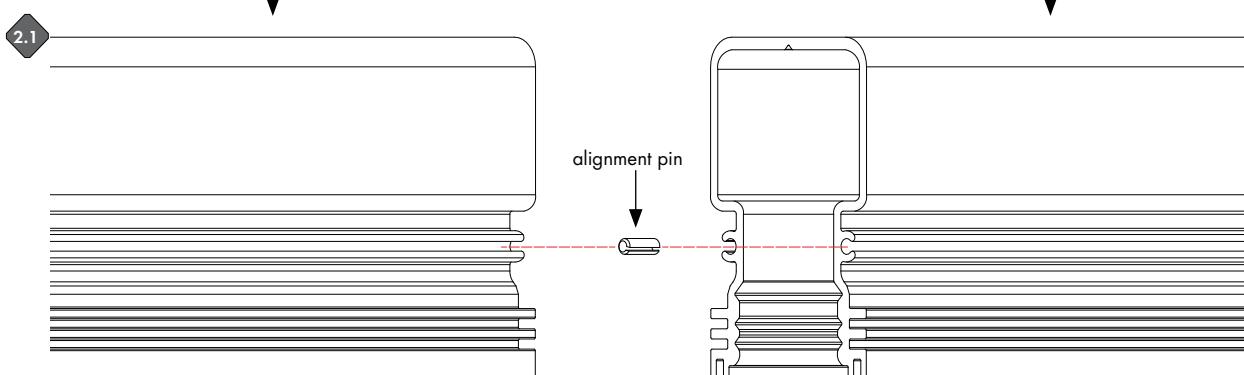

2.1 If more than one extrusion housing, use two alignment pins to connect both side of the extrusion housing.

Installation Instructions - Plexineon Recessed Static Color

Models: Plexineon Fixture Recessed Mount Static Color

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT
3. 24 VOLTS DC
4. SUITABLE FOR WET LOCATIONS
5. RECESSED MOUNT ONLY




REVO2
01272026


3 / 6

ilight by luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

INSTALLATION OPTIONS

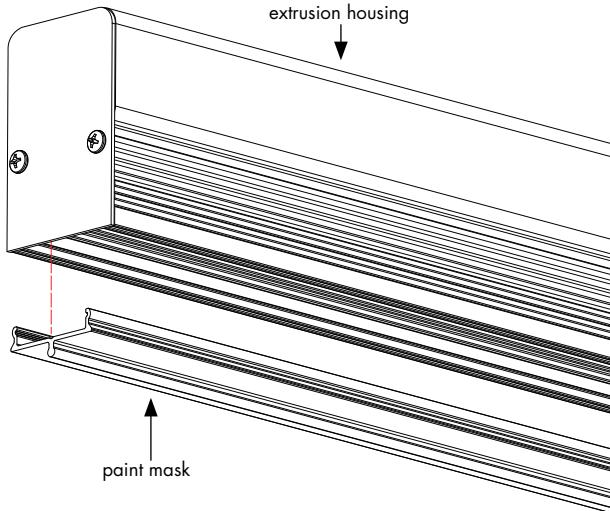

NOTE: Use paint mask to protect extrusion housing when doing a surface/wall finishing. Install plexineon fixtures after removing paint mask

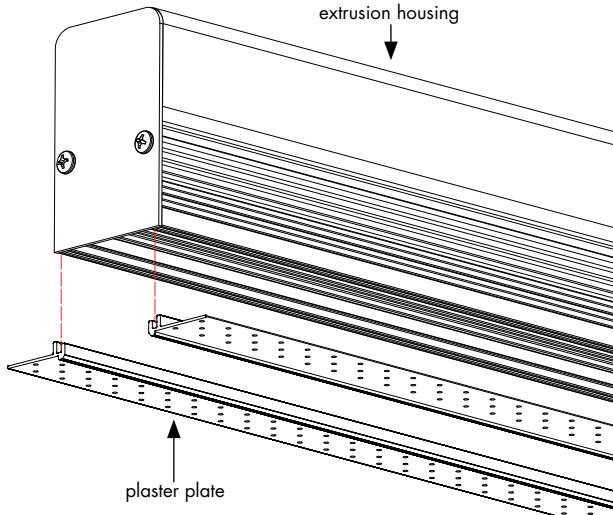


NOTE: Use plaster plate when doing a mud-in installation. Use paint mask to protect extrusion housing during surface/wall finishing.


INSTALLATION OPTIONS

Wood Blocking Installation

NOTE: Blocks are provided by others.

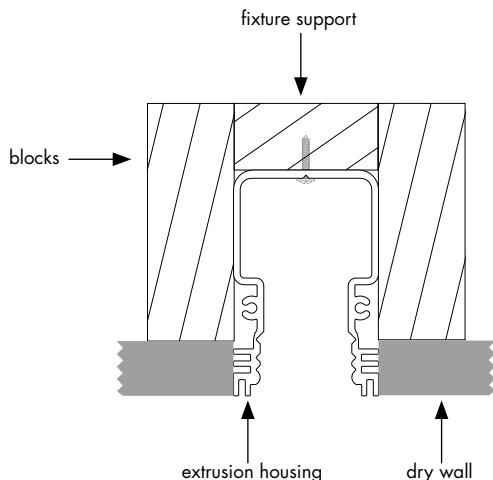

Mud-in Installation

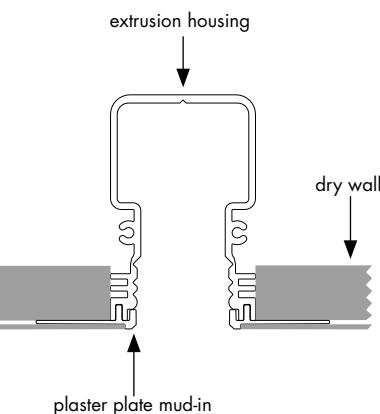

Installation Instructions - Plexineon Recessed Static Color

Models: Plexineon Fixture Recessed Mount Static Color

Please read all instructions prior to installation and keep for future reference!

- 1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
- 2. USE ONLY WITH CLASS 2 POWER UNIT
- 3. 24 VOLTS DC
- 4. SUITABLE FOR WET LOCATIONS
- 5. RECESSED MOUNT ONLY




REVO2
01272026


4 / 6

ilight by luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

3

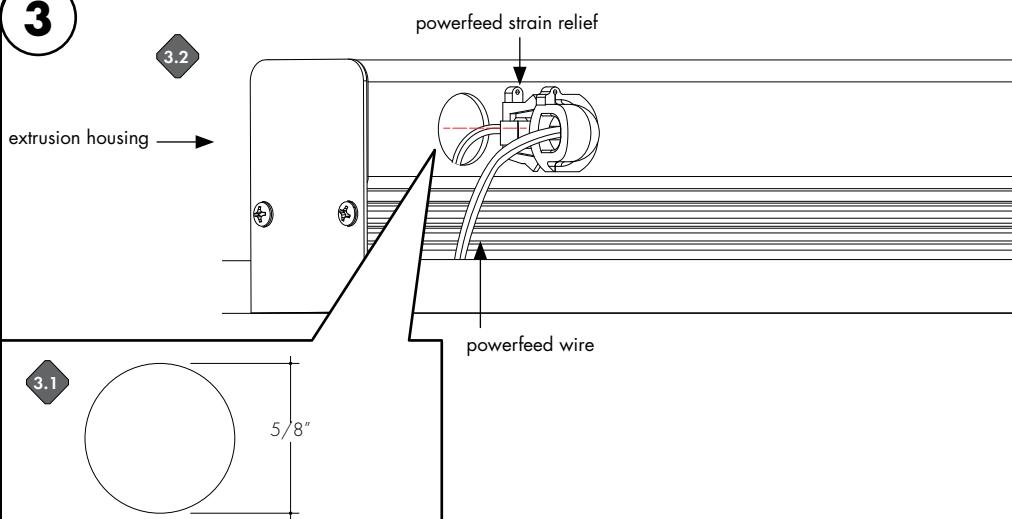

3.3

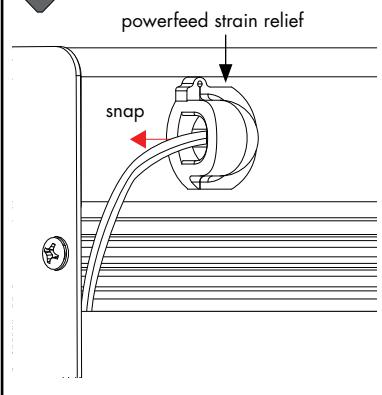



3.1 Drill or punch $\varnothing 5/8"$ hole into extrusion housing.

NOTE: Drill hole on extrusion housing before install into wall/surface.

3.2 Clamp powerfeed strain relief to wire.

3.3 Snap powerfeed strain relief into hole.

4

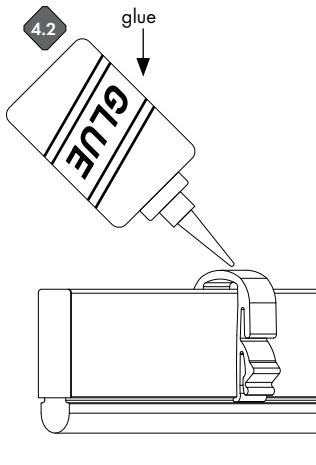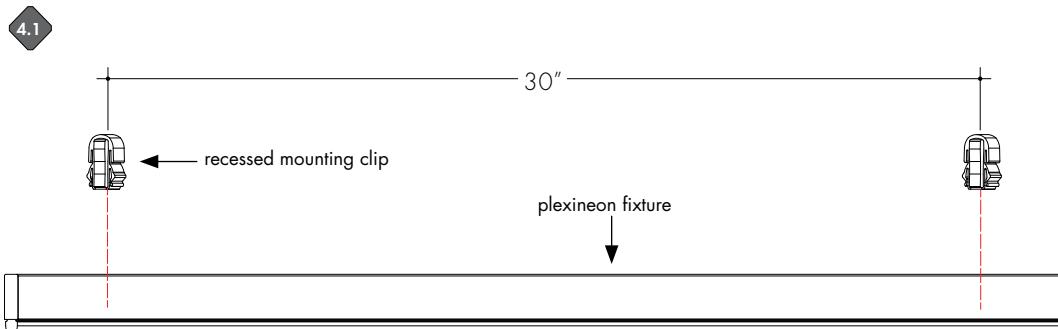

4.1 Install recessed mounting clips to fixture. Make sure they are approximately 30" apart.

4.2 Use glue to fill in all gaps between recessed mounting clips and plexineon fixture.

Installation Instructions - Plexineon Recessed Static Color

Models: Plexineon Fixture Recessed Mount Static Color

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT
3. 24 VOLTS DC
4. SUITABLE FOR WET LOCATIONS

5. RECESSED MOUNT ONLY




REVO.2
01272026

5 / 6

ilight
by luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

4

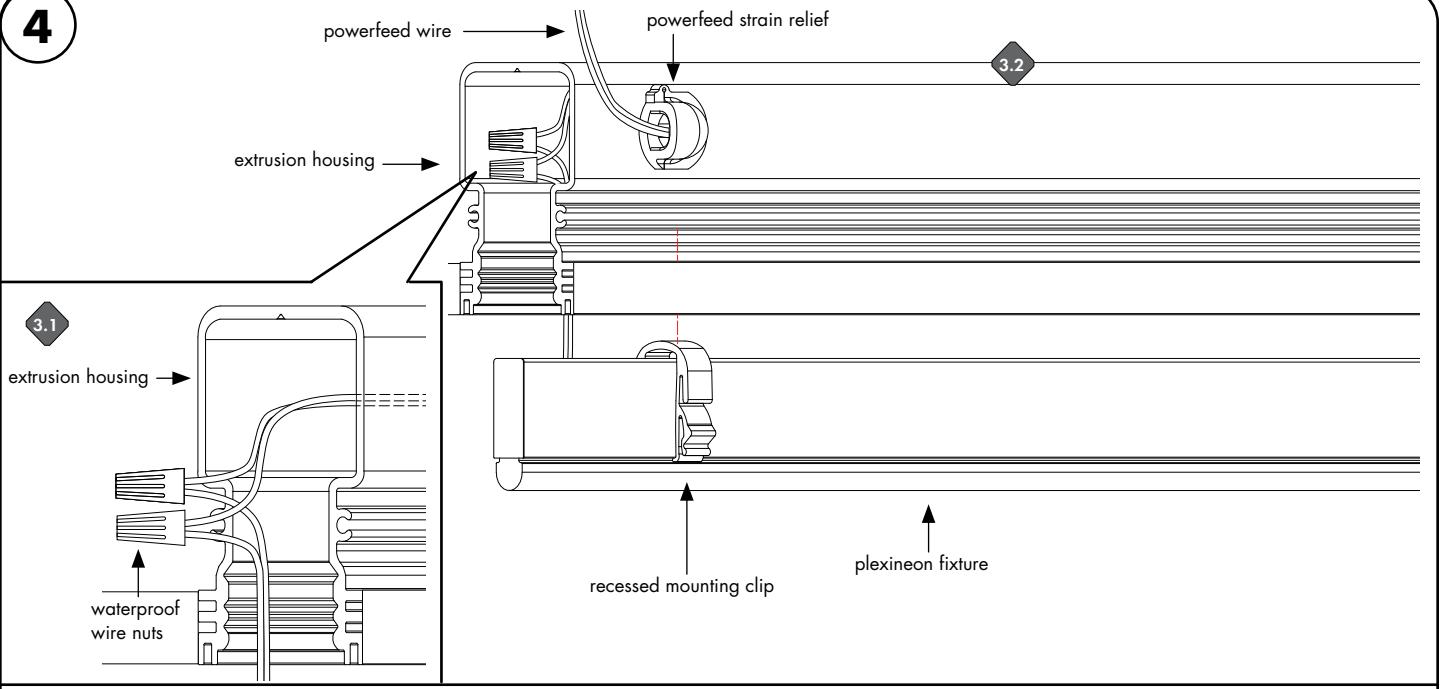

4.1 Peel back power cord to expose wires. Connect power supply wires to fixture wires. Waterproof wire nuts recommended in this step.

4.2 Snap plexineon fixture with glued mounting clips into extrusion housing.

Installation Instructions - Plexineon Recessed Static Color

Models: Plexineon Fixture Recessed Mount Static Color

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT
3. 24 VOLTS DC
4. SUITABLE FOR WET LOCATIONS

5. RECESSED MOUNT ONLY




REVO2
01272026

6 / 6

ilight
by luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

5

5.1 Connect +24 VDC red from the Plexineon to the power supply +24 VDC red wire. Connect -24 VDC black wire from the Plexineon to power supply -24 VDC black wire.

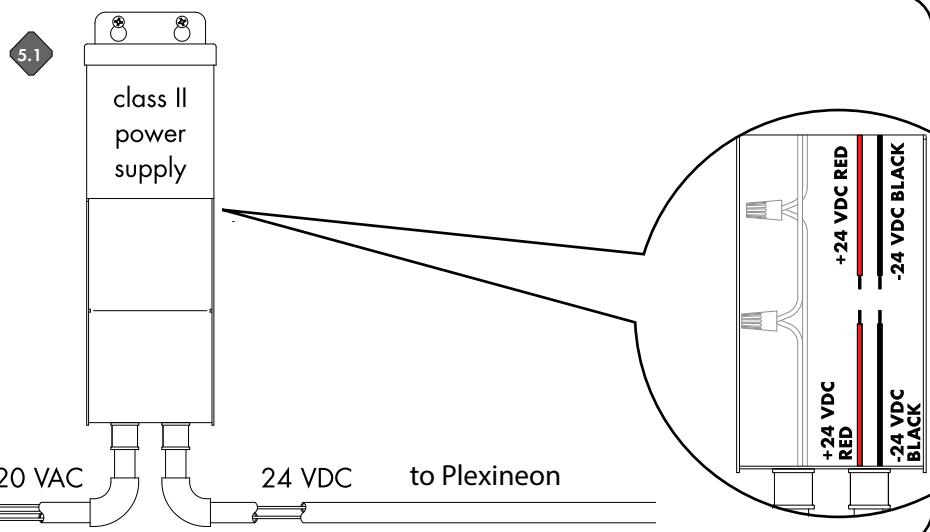

Multiple Fixtures



Power Supply Wiring Diagram

Note: Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instructions for additional information.



Static White
[Wiring Diagram PDF](#)