


Plexineon Rings Suspended Mount

Static White and Monochrome Colors

ilight
by luminii



- Easy to install, for interior accent lighting
- Neon look providing a crisp, clear line of light visible for miles
- Mounting Clips and aircraft cable are included in the appropriate quantities
- Operating Temperature: -40° F to 140° F (-40° C to 60° C)
- 24VDC Class 2
- IK10 and 3G rated
- 5 year warranty indoor



Technical Information

RING OUTER DIAMETER* (inch)		Plexineon Static White (30K)	Plexineon Monochrome Colors					
			Red	Blue	Green	Magenta	Teal	Yellow
WAVELENGTH		N/A	622 nm	468 nm	525 nm	567 nm	486 nm	563 nm
EFFICACY		39 lm/W	12.1 lm/W	8.1 lm/W	33.8 lm/W	9.2 lm/W	20.9 lm/W	23.2 lm/W
Ø36 (Ø3ft)	Lumen Output	1159 lm	132 lm	104 lm	471 lm	226 lm	565 lm	584 lm
	Power Consumption	30.2 W	11.3 W	13.2 W	14.1 W	24.5 W	27.3 W	25.4 W
Ø72 (Ø6ft)	Lumen Output	2318 lm	264 lm	207 lm	942 lm	452 lm	1131 lm	1169 lm
	Power Consumption	60.3 W	22.6 W	26.4 W	28.3 W	49.0 W	54.7 W	50.9 W
Ø144 (Ø12ft)	Lumen Output	4637 lm	528 lm	415 lm	1885 lm	905 lm	2262 lm	2337 lm
	Power Consumption	120.6 W	45.2 W	52.8 W	56.5 W	98.0 W	109.3 W	101.8 W
Ø288 (Ø24ft)	Lumen Output	9274 lm	1056 lm	829 lm	3770 lm	1810 lm	4524 lm	4675 lm
	Power Consumption	241.3 W	90.5 W	105.6 W	113.1 W	196.0 W	218.7 W	218.7 W

*Rings will be made of equal sections no longer than 96" arc length. Rings exceeding 96W will have allowances for additional power feeds.

CCT	Multiplier (reference - 3000K)	CRI	TM-30	
			R _f	R _g
2700K	0.94	90	88	97
3000k	1.00	90	87	97
3500k	1.02	90	87	97
4000k	1.02	90	84	92

Ordering Code

MODEL	RING DIAMETER ¹	RING TYPE	CCT	OUTPUT	LENS	MOUNTING ²	BODY FINISH	CANOPY FINISH	POWERFEED POSITION/TYPE
PX - Plexineon	____ Ring Outer diameter in inches, 6"-288" (24ft)	HR - Horizontal Ring	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K B - Blue G - Green T - Teal Y - Yellow R - Red M - Magenta	SO - Standard	F - Frosted	SP - Suspension Mount, Standard Clips SPD - Suspension Mount, Decorative Clips ³	GG - Gloss Grey BK - Matte Black GY - Matte Grey WH - Matte White	BK - Matte Black WH - Matte White	B-4 - Plug Quick Connect one end, Receptacle Quick Connect other end

1. Rings will be made of equal sections no longer than 96" arc length. Tolerance on size of diameter is +/- 1".

2. 2 mounting clips included for every 12" of diameter, with a minimum of 3 clips.

3. Standard mounting clip come with stainless steel finish. Decorative Clips match the fixture finish.

Plexineon Rings Suspended Mount

Static White and Monochrome Colors

Finish Options


BK
Matte Black Finish




WH
Matte White Finish



GY
Matte Grey Finish



GG
Gloss Grey Finish




Suspension Hardware

- Suspension Hardware is included with Plexineon runs in the appropriate quantity, every 30" of linear/arc length
- Standard Clips have a stainless steel finish, Decorative Clip finishes match the fixture finishes
- Canopy Finishes come in Black or White.

SP/SPD

SC-1MP2-SCL-0X-0Y

Suspension Kit with Single Clip,
Ø2.0" canopy, 150" A/C Cable




SC-1MP2-DCL-0X-0Y

Suspension Kit with Joiner Clip,
Ø2.0" canopy, 150" A/C Cable




SC-1FC5-SCL-C2-0X-0Y

Powerfeed Canopy Suspension Kit with
Single Clip, Ø5.0" canopy, 150" A/C Cable



SC-1FC5-DCL-C2-0X-0Y

Powerfeed Canopy Suspension Kit with Joiner
Clip, Ø5.0" canopy, 150" A/C Cable



Used approximately every 30" of linear/arc length for Standard Clips and every 18" of linear/arc length for Decorative Clips

Use to join two fixtures together in the middle of a Suspended Run

Used at the start of every Suspended Run

Used to join two fixtures together and to drop power in the middle of a Suspended Run

0X	Clip Finish
00	Stainless Steel
01	Matte Black
02	Matte Grey
03	Matte White

0Y	Canopy Finish
01	Matte Black
03	Matte White


Plexineon Rings Suspended Mount

Static White and Monochrome Colors




Powerfeed and Connectors

- Quick Connectors with 6" flying leads are included in the Plexineon runs per CCT option selected. Order extras as desired.




60-SJ-0001-08

iLight TABBED PLUG Quick Connect with 6" flying leads, 2-conductor




Also available with longer Flying Leads

60-SJ-C2-0001-01 120" flying leads




60-SJ-0002-08

iLight RECEPTABLE Quick Connect with 6" flying leads, 2-conductor




Also available with longer Flying Leads

60-SJ-C2-0002-01 120" flying leads



60-SJ-C2-JMP-12-01

iLight Plug-Receptacle Quick Connect 12" Jumper, 2-conductor, Black silicone jacket



Also available with longer wires

60-SJ-C2-JMP-48-01 48" jumper

60-SJ-C2-JMP-120-01 120" jumper

Additional Material

60-12-22AWGSBWN


Weatherproof Wire Nut Silicone Filled



Order 2 per Power Supply.

55-STW02-050-00


50 ft of 14 gauge wire Black jacket, 2 conductors



Sunlight, moisture resistant, and flame retardant PVC jacket per UL 1277

70-TOL02-001-01

Mounting Clip Installation Tool



Use for installation of Plexineon into Mounting Clips

Plexineon Rings


Suspended Mount

Static White and Monochrome Colors



Ring Types

HR
Horizontal Ring

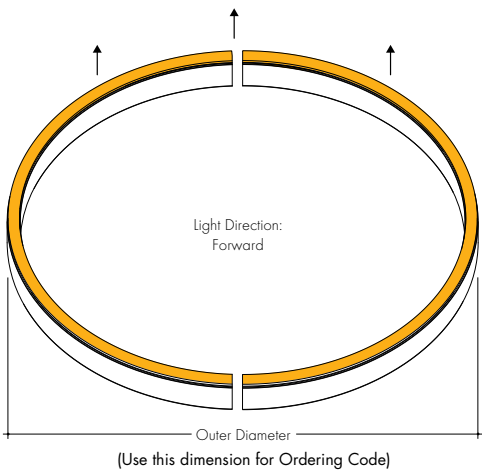


Additional Material

- Ordered separately.


CC-2MF-190-SCL-C2-0X-0Y

Powerfeed Canopy Suspension Kit with Cross Cable and 2 Single Clips Ø5.0" canopy 150" A/C Cable

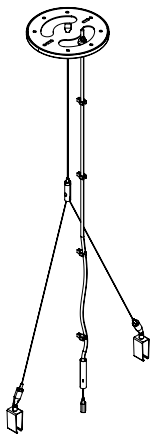

CC-2MF-150-SCL-C2-0X-0Y

Powerfeed Canopy Suspension Kit with 2 Cables and Single Clips Ø5.0" canopy 150" A/C Cable



SC-2FC5-DCL-C2-0X-0Y

Dual Powerfeed Canopy Standard or Decorative Joiner Clips 150" A/C Cable



0X	Clip Finish
00	Stainless Steel
01	Matte Black
02	Matte Grey
03	Matte White

0Y	Canopy Finish
01	Matte Black
03	Matte White

Plexineon Rings Suspended Mount

Static White and Monochrome Colors




ilight
by luminii

Sample Layout

PX-48-HR-30K-SO-F-SP-GG-B-PFC

Plexineon Horizontal Ring, Suspended Mounting Clips

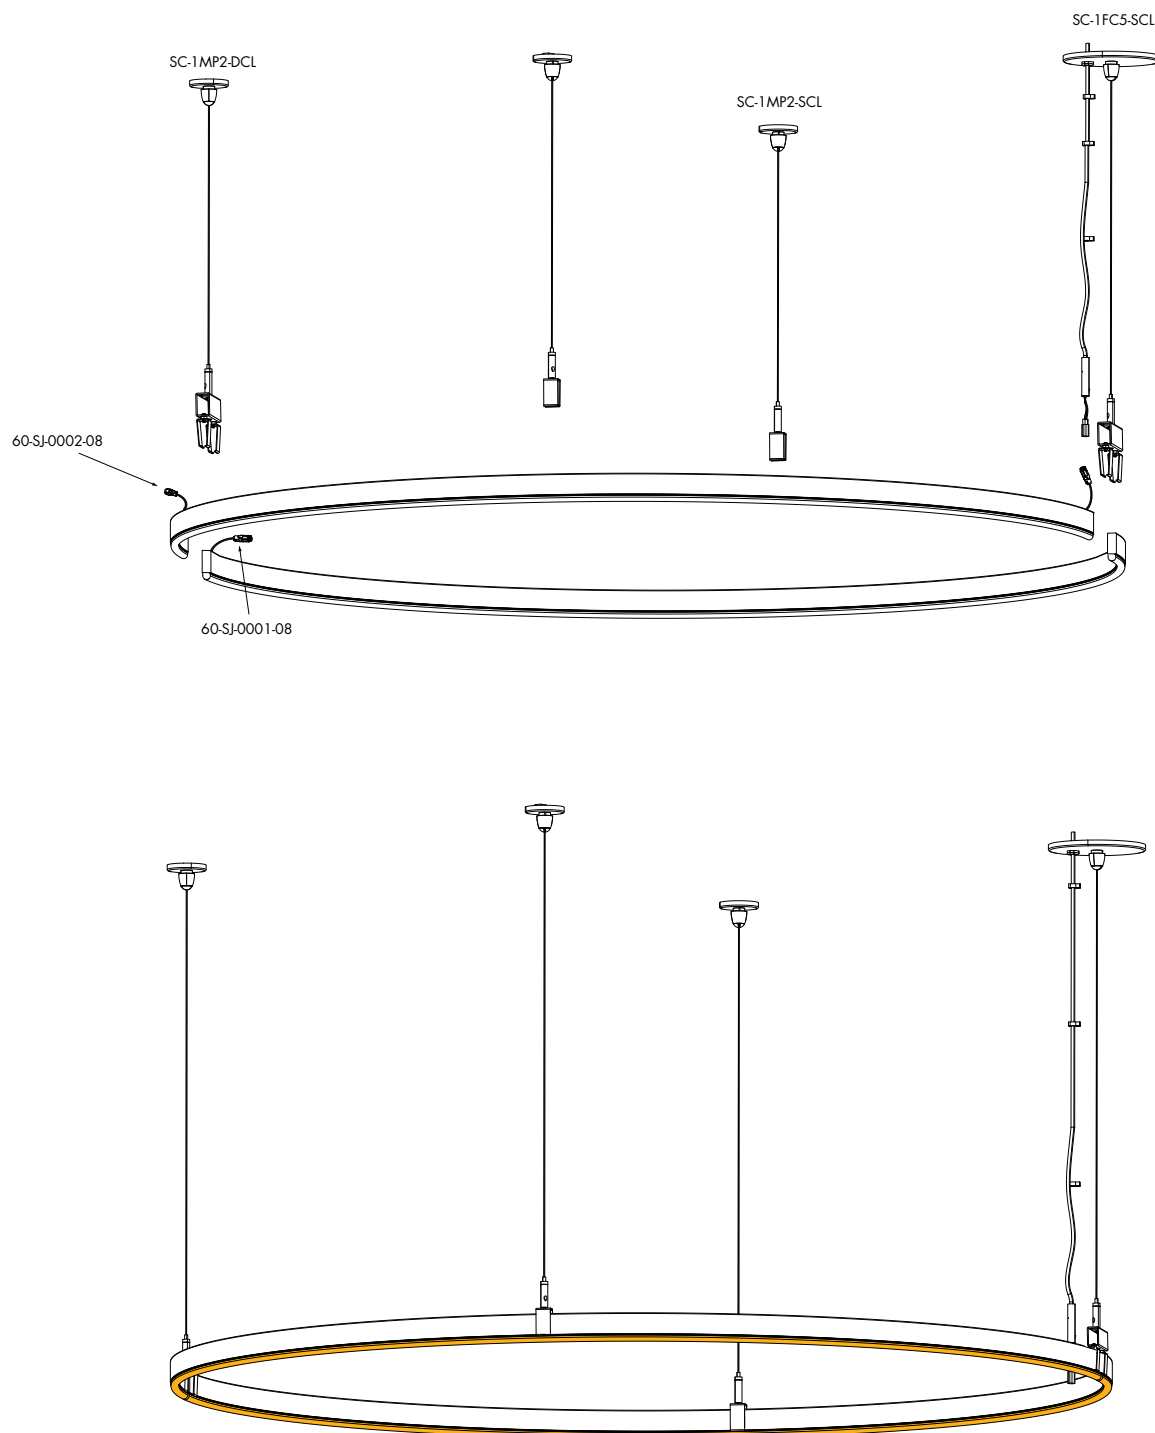

Plexineon Rings Suspended Mount

Static White and Monochrome Colors



Power Consumption

Tested at Full Power with PS-UNI Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

Static White

Nominal Ring Dia (in)	Wattage Per Ring	Nominal Ring Dia (in)	Wattage Per Ring
12	9.9	217	179.2
24	19.5	222	183.2
36	30.4	227	187.2
48	39	232	191.2
60	48.6	237	194.4
72	58.5	242	198.4
84	68.7	244	201.6
96	78	250	206.1
156	127.2	256	210.6
159	130.2	261	215.1
163	134.4	267	218.7
167	137.4	273	223.2
171	140.4	272	224
174	143.4	278	229
178	145.8	284	234
182	148.8		
181	148.4		
186	151.9		
190	156.8		
195	160.3		
199	163.8		
203	167.3		
208	170.1		
212	173.6		

Plexineon Rings Suspended Mount

Static White and Monochrome Colors



Power Consumption

Tested at Full Power with PS-UNI Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

Monochrome													
Nominal Length (in)	Watts						Nominal Length (in)	Watts					
	Red	Yellow	Green	Teal	Blue	Magenta		Red	Yellow	Green	Teal	Blue	Magenta
12	3.6	8.4	4.8	9.1	4.6	8.2	217	67.2	154.4	86.4	169.6	83.2	150.4
24	7.5	17.4	9.9	18.8	9.2	16.6	222	69.6	158.4	88.8	173.6	84.8	152
36	11	25.6	14.4	28.4	13.6	25	227	71.2	160	92.8	175.2	86.4	156
48	15	34.8	19.8	37.6	18.4	33.2	232	73.6	168	94.4	183.2	88.8	160
60	18.4	42	23.6	46.2	22.2	40.6	237	73.6	168	94.4	184.8	88.8	162.4
72	22.5	52.2	29.7	56.4	27.6	49.8	242	73.6	168	94.4	185.6	92.8	165.6
84	26.1	59.4	33.3	65.1	31.8	57	244	75.6	173.7	97.2	190.8	93.6	169.2
96	30	69.6	39.6	75.2	36.8	66.4	250	78.3	178.2	99.9	195.3	95.4	171
156	49.2	109.8	63.6	121.2	59.4	108.6	256	80.1	180	104.4	197.1	97.2	175.5
159	50.4	114.6	64.8	126	60.6	109.8	261	82.8	189	106.2	206.1	99.9	180
163	50.4	115.8	64.8	127.2	62.4	112.8	267	82.8	189	106.2	207.9	99.9	182.7
167	52.2	118.8	66.6	130.2	63.6	114	273	82.8	189	106.2	208.8	104.4	186.3
171	53.4	120	69.6	131.4	64.8	117	272	84	193	108	212	104	188
174	55.2	126	70.8	137.4	66.6	120	278	87	198	111	217	106	190
178	55.2	126	70.8	138.6	66.6	121.8	284	89	200	116	219	108	195
182	55.2	126	70.8	139.2	69.6	124.2							
181	57.4	128.1	74.2	141.4	69.3	126.7							
186	58.8	133.7	75.6	147	70.7	128.1							
190	58.8	135.1	75.6	148.4	72.8	131.6							
195	60.9	138.6	77.7	151.9	74.2	133							
199	62.3	140	81.2	153.3	75.6	136.5							
203	64.4	147	82.6	160.3	77.7	140							
208	64.4	147	82.6	161.7	77.7	142.1							
212	64.4	147	82.6	162.4	81.2	144.9							

Plexineon Rings Suspended Mount

Static White and Monochrome Colors



Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Maximum Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

Plexineon Rings Suspended Mount

Static White and Monochrome Colors



ilight
by luminii

Common Applications

Custom Indoor Designs | Coves | Signs | Building Facades | Lobbies | Hallways | Statement Pieces | Restaurants

Corporate Offices | Schools | Residential Towers | Parking Garages | Hotels | Bridges | Benches | Airports



Plexineon Rings Suspended Mount

Static White and Monochrome Colors

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.


Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)	30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.

0-10V - 0.1% dimming
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart


MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

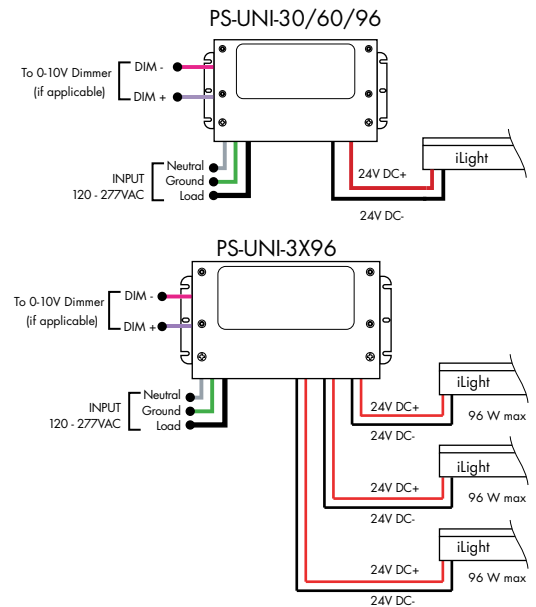


Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D - Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

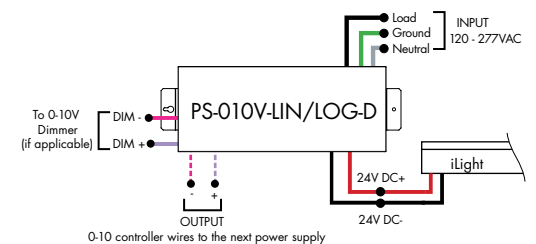

PS-010V-LIN/LOG-D-3X96

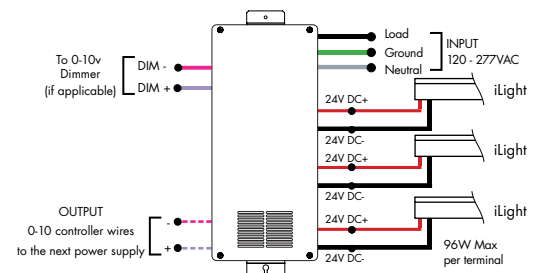

Plexineon Rings Suspended Mount


Static White and Monochrome Colors

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Ordering Code - Athena 0-10V LED Driver


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D-Dry	96-96 Watts	24-24 VDC	AWN - Athena

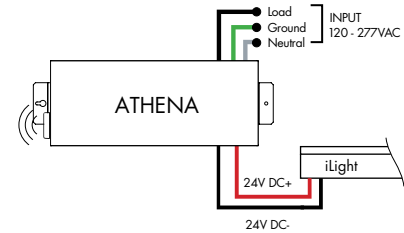

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-DT6 - DALI2 DT6 (0.1%)	D-Dry	96-96 Watts	24-24 VDC

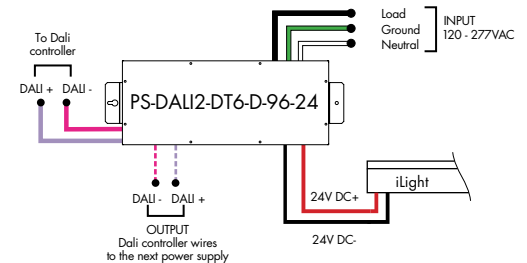


Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI - DALI (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

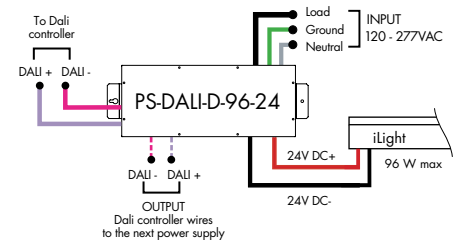

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

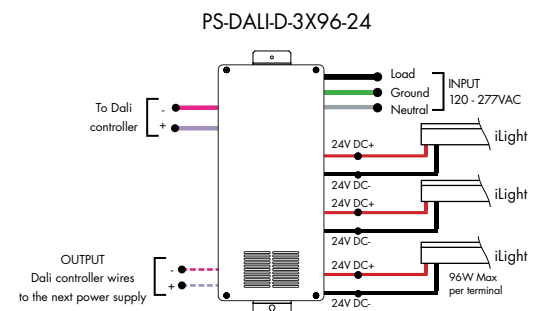

Plexineon Rings Suspended Mount

Static White and Monochrome Colors

Power Supplies



See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"


ZONAL CONTROL POWER SUPPLIES.
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

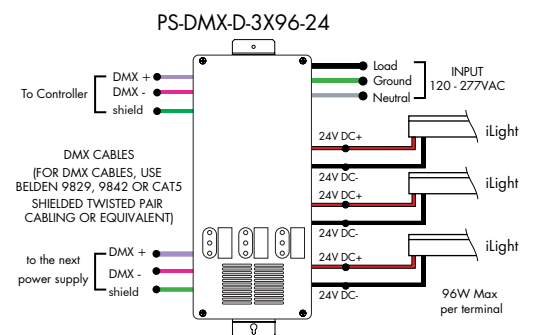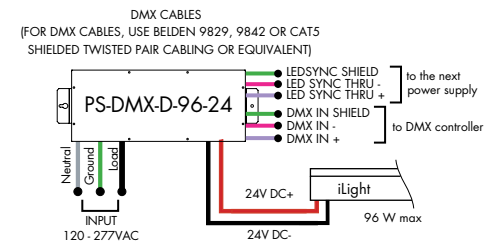

Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

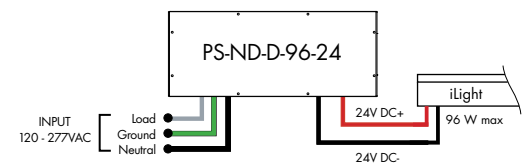

Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120 - Power Supply, 120VAC PS240 - Power Supply, 240VAC PS277 - Power Supply, 277VAC	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC

MODELS	2X96W
Length	8.40"
Width	8.30"
Depth	8.10"

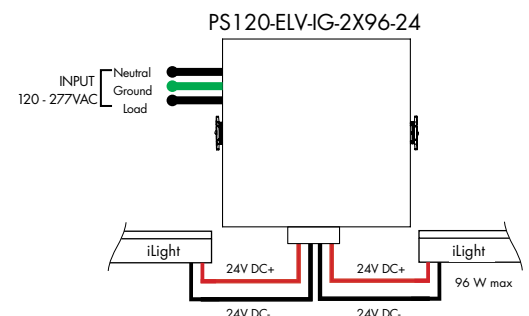

Plexineon Rings Suspended Mount

Static White and Monochrome Colors



Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



Luminii is a Lutron OEM Advantage Partner


Lutron Power Supplies 1%

MODEL

L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver
40W max

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"

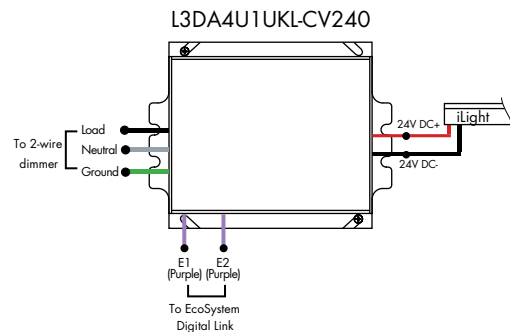

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™
96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

