



Plexineon Suspended Mount

Static White and Monochrome Colors


ilight
by luminii

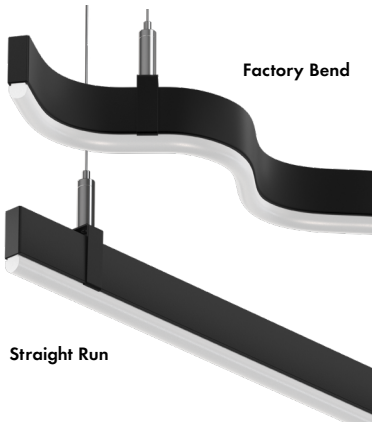

- Easy to install, for interior accent lighting
- Neon look providing a crisp, clear line of light visible for miles
- Creative freedom to make stunning designs, rigid construction maintains factory formed shape
- Mounting Clips and aircraft cable are included in the appropriate quantities
- Operating Temperature: -40° F to 140° F (-40° C to 60° C)
- 24VDC Class 2
- IK10 and 3G rated
- 5 year warranty indoor



Straight Run



With Mounting Clip and A/C hardware



Technical Information

MODEL	Plexineon Static White (30K)	Plexineon Monochrome Colors					
		Red	Blue	Green	Magenta	Teal	Yellow
OUTPUT OPTIONS	SO	SO					
Lumens Output (3000K)	123 lm/ft	14 lm/ft	11 lm/ft	50 lm/ft	24 lm/ft	60 lm/ft	62 lm/ft
Average Power Consumption (for a 4" section)	3.2 W/ft	1.2 W/ft	1.4 W/ft	1.5 W/ft	2.6 W/ft	2.9 W/ft	2.7 W/ft
Wavelength	N/A	622 nm	468 nm	525 nm	567 nm	486 nm	563 nm
Efficacy	39 lm/W	12.1 lm/W	8.1 lm/W	33.8 lm/W	9.2 lm/W	20.9 lm/W	23.2 lm/W
Order Increment	1.97"	1.97"					
Max Run Length (in series)	30 ft	32ft	32ft	32ft	32ft	32ft	32ft

CCT	Multiplier (reference - 3000K)	TM-30		
		CRI	R _f	R _g
2700K	0.94	90	88	97
3000K	1.00	90	87	97
3500K	1.02	90	87	97
4000K	1.02	90	84	92

Ordering Code

MODEL	RUN LENGTH ¹	BEND	CCT	OUTPUT	LENS	MOUNTING ³	BODY FINISH	CANOPY FINISH	POWERFEED POSITION/TYPE
PX - Plexineon	— Run length in inches, 3" min, no max run length	SR - Straight Run EB - Factory Bend, Side/Easy Bend ²	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K B - Blue G - Green T - Teal Y - Yellow R - Red M - Magenta	SO - Standard	F - Frosted	SP - Suspension Mount, Standard Clips SPD - Suspension Mount, Decorative Clips ⁴	GG - Gloss Grey BK - Matte Black GY - Matte Grey WH - Matte White	BK - Matte Black WH - Matte White	B-4 - Plug Quick Connect one end, Receptacle Quick Connect other end

1. Static White and Monochrome colors are available in 2"(1.97") increments, +/- 1/2" tolerance. Run Lengths over 96" (8ft) will be made of equal sections no longer than 96".
2. Factory Bends require an Image or Drawing input at time of Quote to calculate total linear/arc length. Factory Bends require a Custom Drawing submittal at time of Order. Allow 2 weeks (typical) for Custom Drawing generation/confirmation process.

3. Standard mounting clip come with stainless steel finish, included approximately every 30" of linear/arc length.
4. Decorative Clips match the fixture finish, included approximately every 18" of linear/arc length.
5. Quote Number correlates the Quote to the Custom Drawing. If a single Quote includes different designs having the same length, add -1, -2, -3, etc. to the end of the Quote Number for each unique configuration.

Plexineon Suspended Mount


Static White and Monochrome Colors



Corner Dimensions

HC-SR

Horizontal Corner

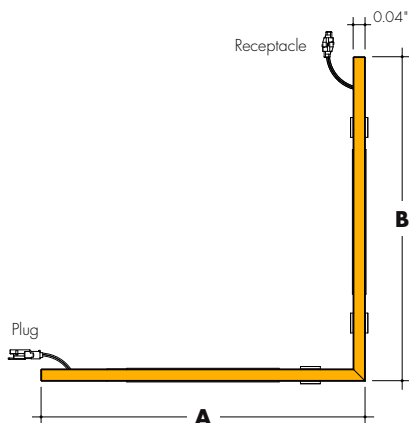

Note: Horizontal Corner legs are asymmetric, receptacle connector is on the longer end, plug connector is on the shorter end.

High Color Quality	Actual Length		Total Wattage						
	A	B	Static White	Red	Yellow	Monochrome Green	Teal	Blue	Magenta
HORIZONTAL (FC-SR)	12 4/16	12 5/16	6.5	2.1	5.5	3.1	6.3	2.9	5.3

Ordering Code

MODEL	CORNER ¹	CCT	OUTPUT	LENS	MOUNTING ¹	BODY FINISH	CANOPY FINISH	POWERFEED POSITION/TYPE
PX - Plexineon	HC-SR - Horizontal Corner	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K B - Blue G - Green T - Teal Y - Yellow R - Red M - Magenta	SO - Standard	F - Frosted	SP - Suspension Mount, Standard Clips SPD - Suspension Mount, Decorative Clips ²	GG - Gloss Grey BK - Matte Black GY - Matte Grey WH - Matte White	BK - Matte Black WH - Matte White	B-4 - Plug Quick Connect one end, Receptacle Quick Connect other end

1. Corners include 3 mounting clips.


2. Standard mounting clip come with stainless steel finish, included approximately every 30" of linear/arc length. Decorative Clips match the fixture finish.

Factory Bends

- Require Custom Drawing submittal and approval.

EB

Factory Bend, Side/Easy Bend

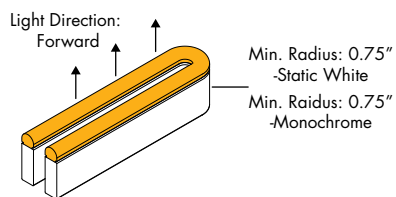

Plexineon Suspended Mount

Static White and Monochrome Colors

Finish Options


BK
Matte Black Finish




WH
Matte White Finish



GY
Matte Grey Finish



GG
Gloss Grey Finish




Suspension Hardware

- Suspension Hardware is included with Plexineon runs in the appropriate quantity, every 30" of linear/arc length
- Standard Clips have a stainless steel finish, Decorative Clip finishes match the fixture finishes
- Canopy Finishes come in Black or White.


SP/SPD

SC-1MP2-SCL-0X-0Y
Suspension Kit with Single Clip,
Ø2.0" canopy, 150" A/C Cable




Used approximately every 30" of linear/
arc length

SC-1MP2-DCL-0X-0Y
Suspension Kit with Joiner Clip,
Ø2.0" canopy, 150" A/C Cable




Use to join two fixtures together in the middle
of a Suspended Run

SC-1FC5-SCL-C2-0X-0Y
Powerfeed Canopy Suspension Kit with
Single Clip, Ø5.0" canopy, 150" A/C Cable

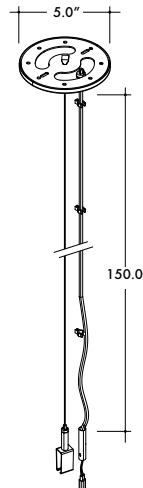

Used at the start of every Suspended Run

SC-1FC5-DCL-C2-0X-0Y
Powerfeed Canopy Suspension Kit with Joiner
Clip, Ø5.0" canopy, 150" A/C Cable

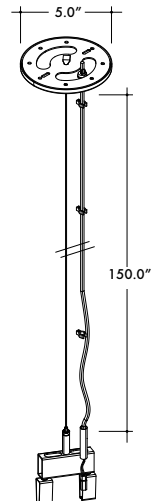

Used to join two fixtures together and to drop
power in the middle of a Suspended Run

0X	Clip Finish
00	Stainless Steel
01	Matte Black
02	Matte Grey
03	Matte White

0Y	Canopy Finish
01	Matte Black
03	Matte White


Plexineon Suspended Mount

Static White and Monochrome Colors




Powerfeed and Connectors

- Quick Connectors with 6" flying leads are included in the Plexineon runs per CCT option selected. Order extras as desired.




60-SJ-0001-08

iLight TABBED PLUG Quick Connect with 6" flying leads, 2-conductor




Also available with longer Flying Leads

60-SJ-C2-0001-01 120" flying leads




60-SJ-0002-08

iLight RECEPTABLE Quick Connect with 6" flying leads, 2-conductor




Also available with longer Flying Leads

60-SJ-C2-0002-01 120" flying leads



60-SJ-C2-JMP-12-01

iLight Plug-Receptacle Quick Connect 12" Jumper, 2-conductor, Black silicone jacket



Also available with longer wires


60-SJ-C2-JMP-48-01 48" jumper

60-SJ-C2-JMP-120-01 120" jumper

Additional Material

60-12-22AWGSBWN


Weatherproof Wire Nut Silicone Filled



Order 2 per Power Supply.

55-STW02-050-00


50 ft of 14 gauge wire Black jacket, 2 conductors



Sunlight, moisture resistant, and flame retardant PVC jacket per UL 1277

70-TOL02-001-01

Mounting Clip Installation Tool



Use for installation of Plexineon into Mounting Clips

Plexineon Suspended Mount


Static White and Monochrome Colors

ilight
by luminii

Sample Layout

PX-120-EB-30K-SO-F-5P-GG-BK-B-4

Plexineon Factory Bend, Suspended Mounting Clips

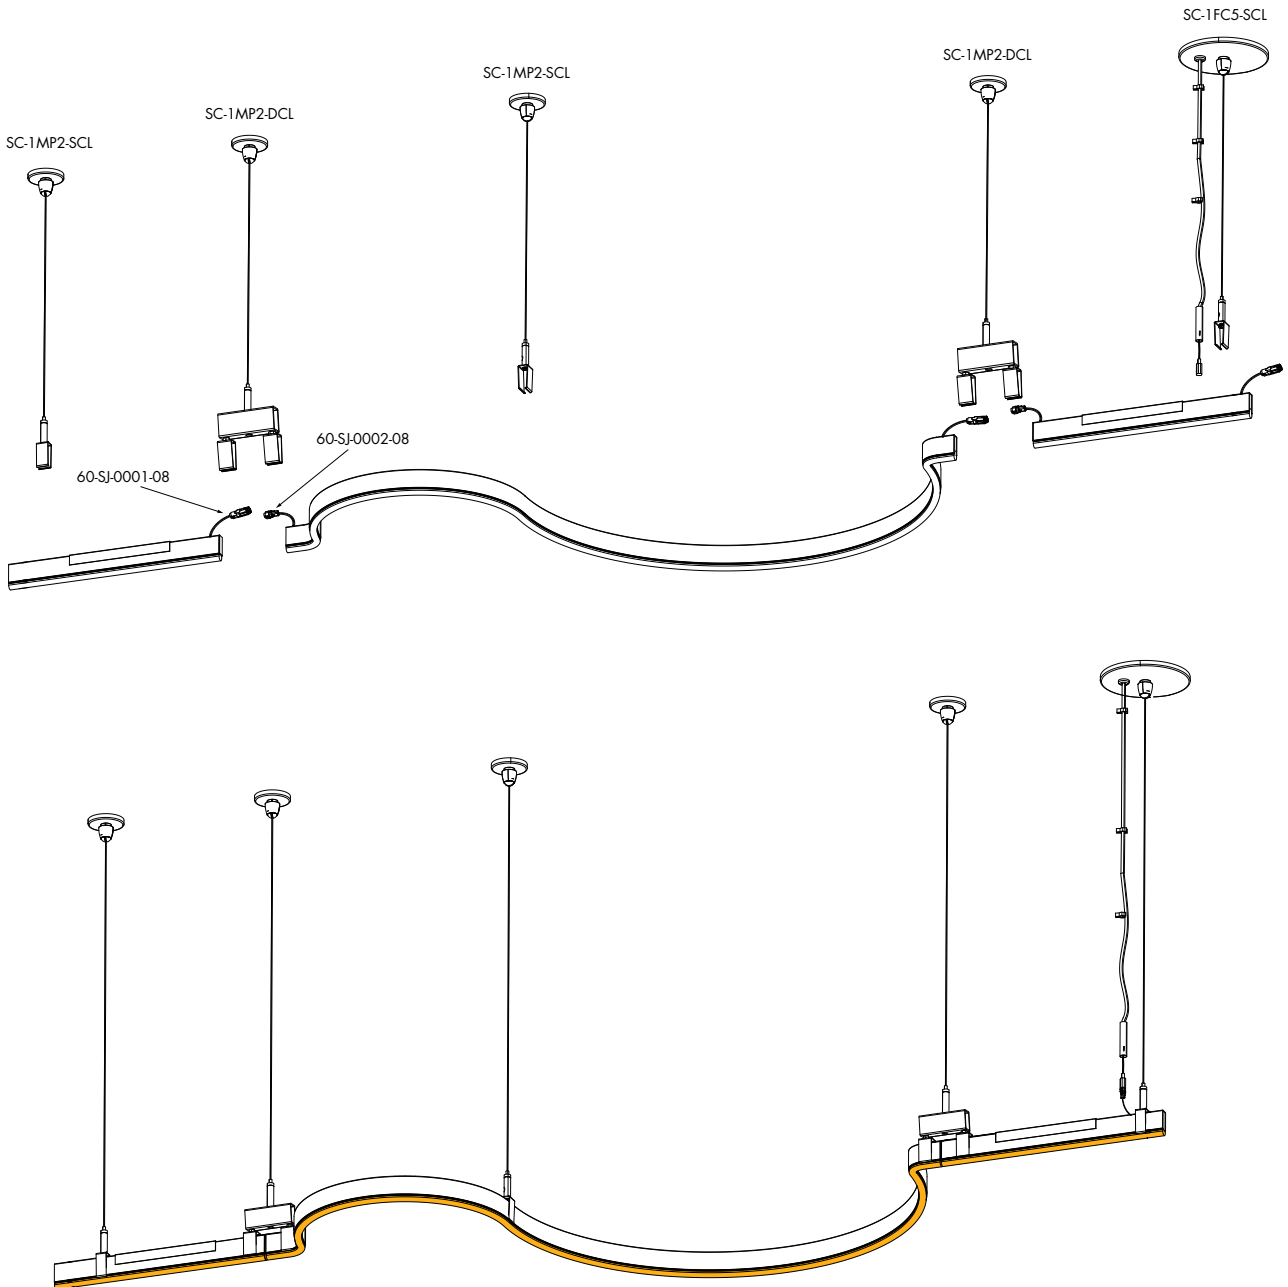

Power Consumption

Tested at Full Power with PS-UNI Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

Static White

Nominal Length (in)	Actual Length	Watts	Nominal Length (in)	Actual Length	Watts
3	2 8/16	2.5	54	53 11/16	14.5
5	4 8/16	4.5	56	55 11/16	15.2
7	6 7/16	1.5	58	57 10/16	15.7
9	8 7/16	2.1	60	59 10/16	16.2
11	10 6/16	2.6	62	61 9/16	16.6
13	12 6/16	3.1	64	63 9/16	17.4
15	14 5/16	3.6	66	65 8/16	17.6
17	16 5/16	4.1	68	67 8/16	18.1
19	18 4/16	4.8	70	69 7/16	18.5
21	20 4/16	5.3	72	71 7/16	19.3
23	22 3/16	5.8	74	73 6/16	19
25	24 3/16	6.5	76	75 6/16	19.5
27	26 2/16	7	78	77 5/16	20
29	28 2/16	7.5	80	79 5/16	20.7
31	30 1/16	8.2	82	81 4/16	21.2
33	32 1/16	8.7	84	83 4/16	21.7
35	34	9.2	86	85 3/16	22.4
36	36	9.9	88	87 3/16	22.9
38	37 15/16	10.4	90	89 2/16	23.4
40	39 15/16	10.8	92	91 2/16	23.9
42	41 14/16	11.6	94	93 1/16	24.3
44	43 14/16	11.9	96	95 1/16	24.8
46	45 13/16	12.5			
48	47 13/16	12.8			
50	49 12/16	13.5			
52	51 12/16	14			

Plexineon Suspended Mount

Static White and Monochrome Colors



Power Consumption

Tested at Full Power with PS-UNI Series power supplies.

Standard Nominal Lengths offered provide minimal shadowing. For alternate lengths, please consult Inside Sales with specific request.

Monochrome

Nominal Length (in)	Actual Length	Watts						Nominal Length (in)	Actual Length	Watts					
		Red	Yellow	Green	Teal	Blue	Magenta			Red	Yellow	Green	Teal	Blue	Magenta
3	2 8/16	0.2	0.4	0.3	0.5	0.2	0.4	54	53 11/16	5.3	12.5	7.0	13.7	6.5	12.1
5	4 8/16	0.4	0.9	0.5	1.0	0.5	0.8	56	55 11/16	5.5	12.8	7.2	14.2	6.8	12.5
7	6 7/16	0.6	1.4	0.8	1.4	0.7	1.4	58	57 10/16	5.8	13.5	7.5	14.7	7.0	23.8
9	8 7/16	0.8	1.6	1.0	1.9	1.0	1.6	60	59 10/16	5.8	14.0	7.7	15.2	7.2	12.8
11	10 6/16	1.0	2.1	1.2	2.6	1.2	2.1	62	61 9/16	6.3	14.2	8.2	15.7	7.5	13.7
13	12 6/16	1.2	2.9	1.4	3.1	1.4	2.6	64	63 9/16	6.5	14.7	8.4	16.2	7.7	14.2
15	14 5/16	1.3	3.1	1.6	3.3	1.6	3.1	66	65 8/16	6.7	15.2	8.7	16.5	8.2	14.7
17	16 5/16	1.4	3.6	1.9	3.8	1.9	3.6	68	67 8/16	6.7	15.7	8.9	17.1	8.4	15.2
19	18 4/16	1.6	4.1	2.1	4.6	2.1	3.8	70	69 7/16	7.0	16.2	9.2	17.6	8.4	15.7
21	20 4/16	1.9	4.6	2.6	5.0	2.1	4.6	72	71 7/16	7.0	16.6	9.2	17.8	8.7	15.9
23	22 3/16	1.9	5.0	2.9	5.5	2.6	5.0	74	73 6/16	7.2	17.1	9.4	18.3	8.9	16.3
25	24 3/16	2.1	5.5	3.1	6.3	2.9	5.3	76	75 6/16	7.5	17.4	9.9	18.8	9.2	16.6
27	26 2/16	2.6	6.3	3.3	6.7	3.1	5.8	78	77 5/16	7.7	17.8	10.1	19.3	9.4	17.1
29	28 2/16	2.9	6.5	3.6	7.0	3.3	6.3	80	79 5/16	7.7	18.1	10.4	19.8	9.6	17.6
31	30 1/16	3.1	7.0	3.8	7.5	3.6	6.7	82	81 4/16	8.2	18.3	10.6	20.2	9.9	18.1
33	32 1/16	3.1	7.2	4.1	8.2	3.8	7.0	84	83 4/16	8.4	19.1	10.8	21.0	10.1	18.3
35	34	3.3	7.7	4.6	8.7	4.1	7.5	86	85 3/16	8.4	19.3	10.8	21.2	10.4	18.8
36	36	3.6	8.4	4.8	9.1	4.6	8.2	88	87 3/16	8.7	19.8	11.1	21.7	10.6	19.0
38	37 15/16	3.8	8.9	5.0	9.7	4.8	8.4	90	89 2/16	8.9	20.0	11.6	21.9	10.8	19.5
40	39 15/16	3.8	9.2	5.3	10.1	4.8	8.9	92	91 2/16	9.2	21.0	11.8	22.9	11.1	20.0
42	41 14/16	4.1	9.9	5.3	10.6	5.0	9.4	94	93 1/16	9.2	21.0	11.8	23.1	11.1	20.3
44	43 14/16	4.6	10.1	5.5	11.1	5.3	9.9	96	95 1/16	9.2	21.0	11.8	23.2	11.6	20.7
46	45 13/16	4.6	10.6	6.1	11.8	5.5	10.4								
48	47 13/16	4.8	11.1	6.3	12.3	5.8	10.6								
50	49 12/16	5.0	11.6	6.5	12.5	6.3	11.1								
52	51 12/16	5.3	12.1	6.7	13.0	6.5	11.6								

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Maximum Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

Plexineon Suspended Mount

Static White and Monochrome Colors

ilight
by luminii

Common Applications

Custom Indoor Designs | Coves | Signs | Building Facades | Lobbies | Hallways | Statement Pieces | Restaurants
Corporate Offices | Schools | Residential Towers | Parking Garages | Hotels | Bridges | Benches | Airports



Plexineon Suspended Mount

Static White and Monochrome Colors



Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.


Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)	30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.

0-10V - 0.1% dimming
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart


MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50"	7.40"	8.66"	11.85"
Width	3.73"	3.73"	3.73"	4.32"
Depth	1.61"	1.61"	1.61"	1.81"

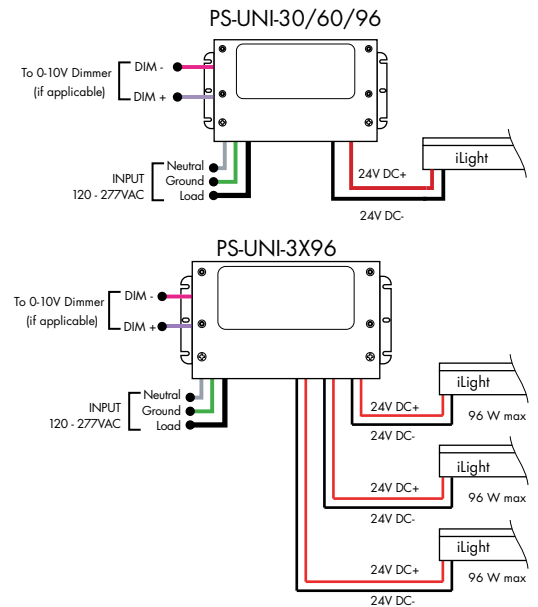


Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D - Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

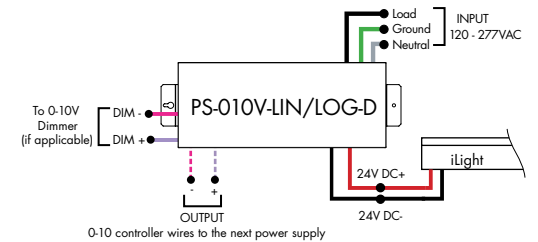

PS-010V-LIN/LOG-D-3X96

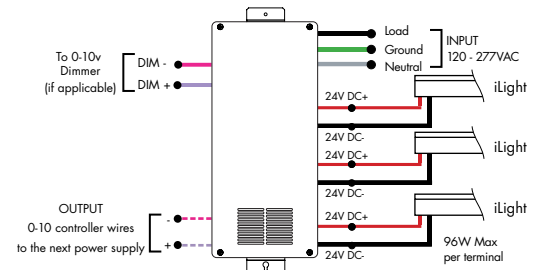

Plexineon Suspended Mount


Static White and Monochrome Colors

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Ordering Code - Athena 0-10V LED Driver


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D-Dry	96-96 Watts	24-24 VDC	AWN - Athena

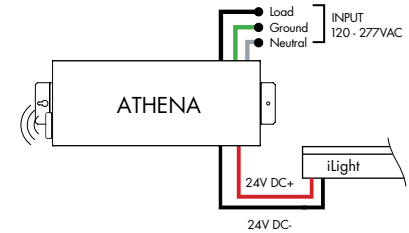

MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-DT6 - DALI2 DT6 (0.1%)	D-Dry	96-96 Watts	24-24 VDC

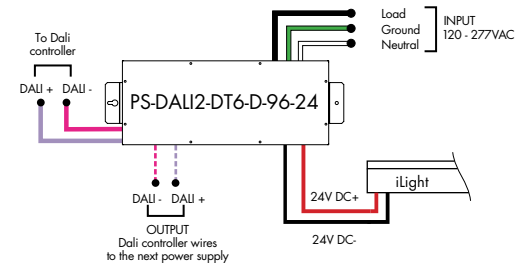

Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"


Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI - DALI (0.1%)	D-Dry	96-96 Watts 3x96 - 3x96 Watts	24-24 VDC

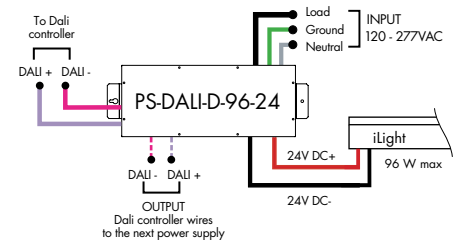

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"

PS-DALI-D-3X96-24

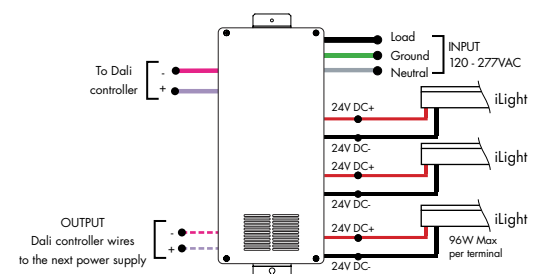

Plexineon Suspended Mount

Static White and Monochrome Colors

ilight
by luminii

Power Supplies



See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DMX - DMX (0.1%)	D - Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"


ZONAL CONTROL POWER SUPPLIES.
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

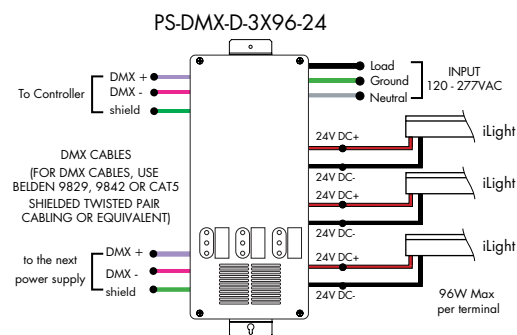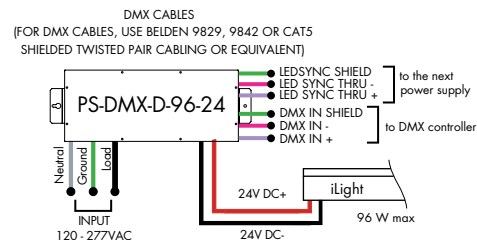

Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	ND - Non Dimming	D - Dry	96 - 96 Watts	24 - 24 VDC


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

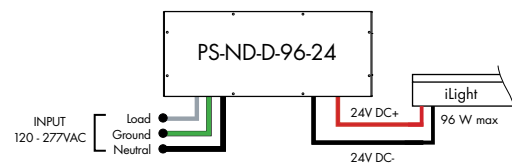

Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120 - Power Supply, 120VAC PS240 - Power Supply, 240VAC PS277 - Power Supply, 277VAC	ELV - ELV Dimming (1%)	IG - In Ground	2X96 - 2X96 Watts	24 - 24 VDC

MODELS	2X96W
Length	8.40"
Width	8.30"
Depth	8.10"

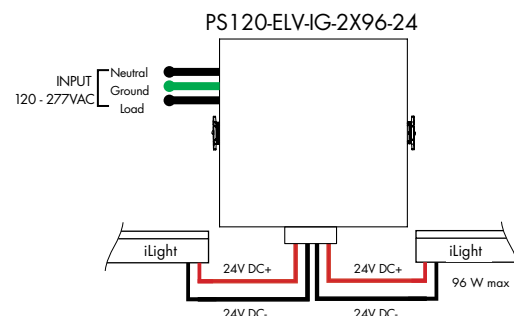

Plexineon Suspended Mount

Static White and Monochrome Colors



Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.



Luminii is a Lutron OEM Advantage Partner


Lutron Power Supplies 1%

MODEL

L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver
40W max

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"

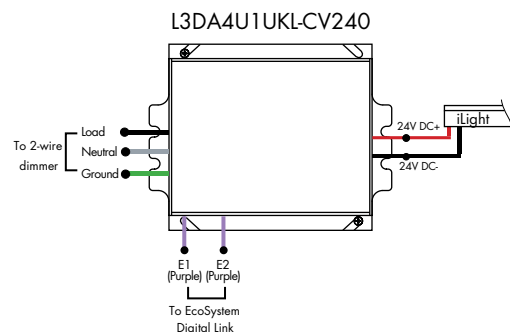

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™
96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

