Runda Wall - Installation Instructions

Model: RUNW-


Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
3. SUITABLE FOR DAMP LOCATIONS.
4. MORE THAN ONE PERSON IS RECOMMENDED FOR THIS INSTALLATION.
5. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.
6. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.

c UL us LISTED

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

1

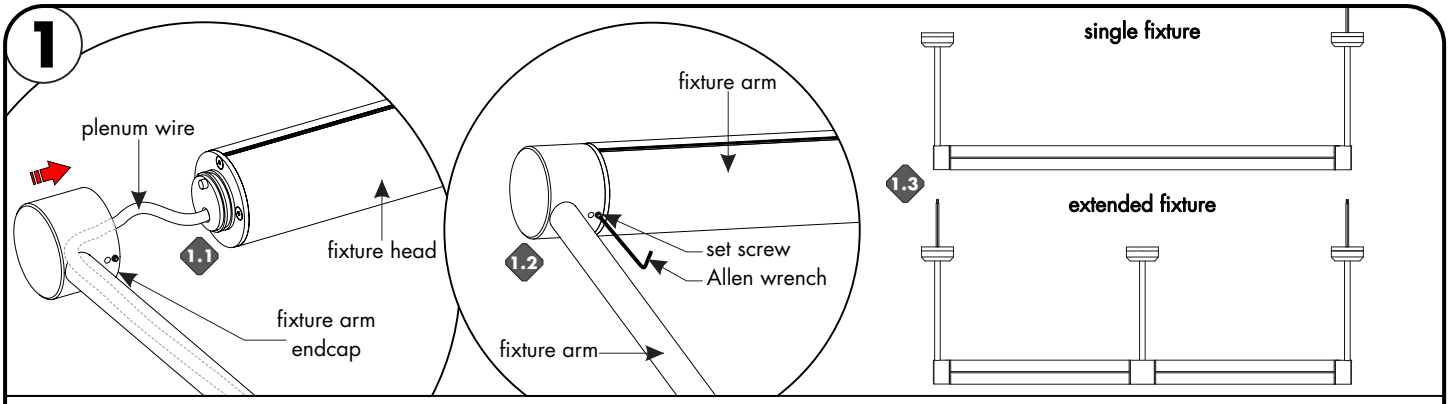


1.1 After removing the fixture from the packaging. Pull the slack out of the plenum wire through the fixture.

1.2 Align the fixture arm endcap to the fixture head, make sure to rotate to the desired position. Then secure by tightening the set screw using the provided Allen wrench


1.3 Repeat for the remaining arm(s). Depending on the fixture type, it may come with additional arms for joiner.

2

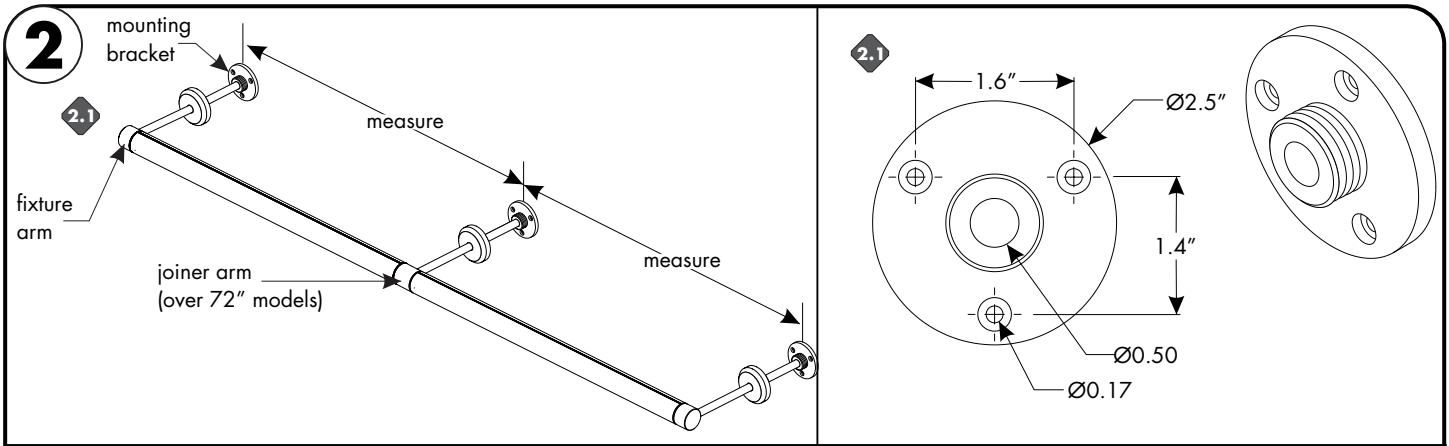


2.1 Measure the distance from one mounting bracket to the next. Then mark these location to the wall. Use the reference detail of mounting bracket above, for any additional information.

3

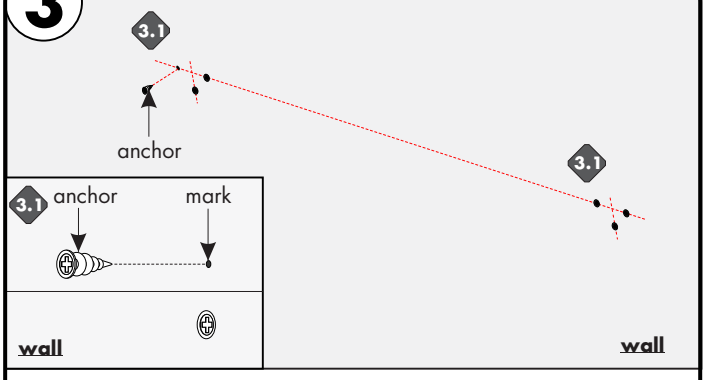

3.1 Align and then tap each anchor onto the marks until the threaded section. Followed by tightening the anchors with a Phillips screw driver. **(Anchors not provided)**

4

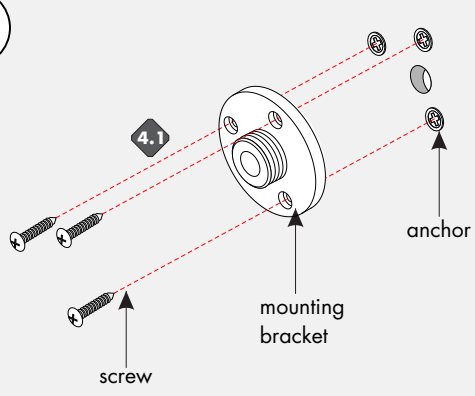

4.1 Secure each mounting bracket onto the anchors using the appropriate hardware.

*LUMINII RESERVES THE RIGHTS TO CHANGE SPECIFICATION & INSTRUCTION WITHOUT NOTICE

Runda Wall - Installation Instructions

Model: RUNW-


Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
3. SUITABLE FOR DAMP LOCATIONS.
4. MORE THAN ONE PERSON IS RECOMMENDED FOR THIS INSTALLATION.
5. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.
6. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.

c UL us LISTED

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

5

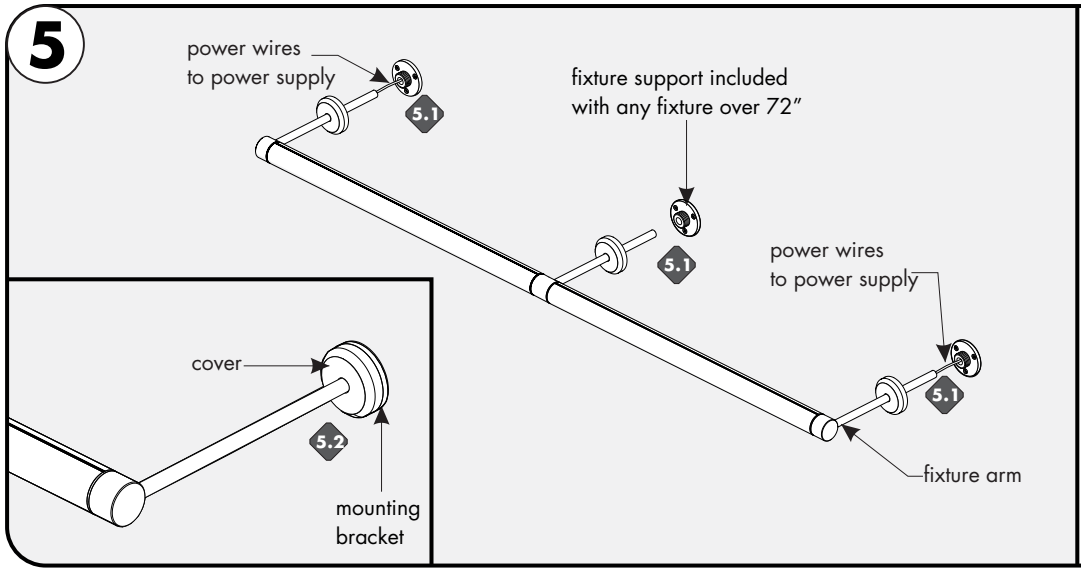


5.1 While holding the fixture, run the power feed wires through the mounting bracket. ***Slide each fixture arm completely into its mounting bracket and secure by tightening the set screw.***

5.2 Thread covers completely onto the mounting brackets.

6

6.1 Connect +24 VDC red wire from the fixture to the power supply +24 VDC red wire with a wire nut. Connect -24VDC black wire from the fixture to power supply -24VDC black wire with a wire nut.

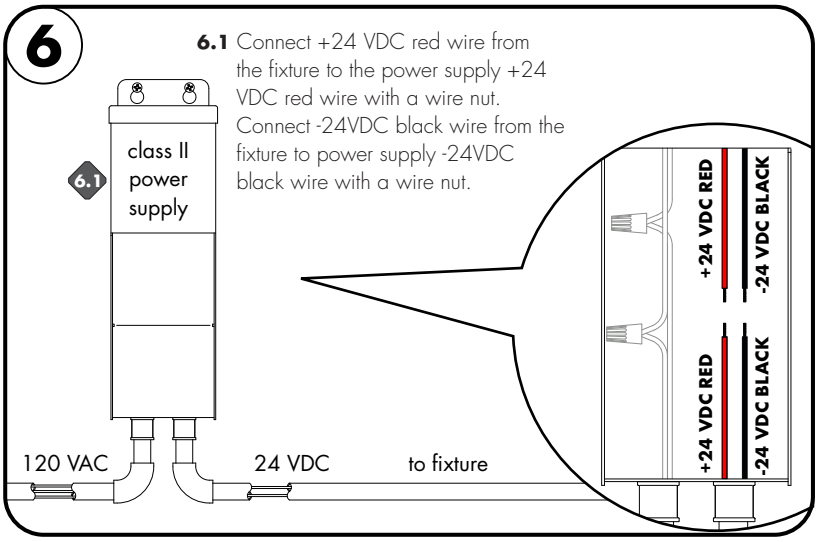

Runda Wall - Installation Instructions

Model: RUNW-

Please read all instructions prior to installation and keep for future reference!

1. PRODUCT TO BE INSTALLED BY A QUALIFIED ELECTRICIAN.
2. USE ONLY WITH CLASS 2 POWER UNIT.
3. 24 VOLTS DC.
3. SUITABLE FOR DAMP LOCATIONS.
4. MORE THAN ONE PERSON IS RECOMMENDED FOR THIS INSTALLATION.
5. FIXTURE SHOULD BE INSTALLED BY TWO PEOPLE.
6. SUITABLE FOR INSTALLATION IN THE STORAGE AREA OF A CLOTHES CLOSET ON OUTPUTS 5.7W/FT OR LESS.

c UL us LISTED

luminii
7777 Merrimac Ave
Niles, IL 60714
T 224.333.6033
F 224.757.7557
info@luminii.com
www.luminii.com

Power Supply Wiring Diagram

Note: *Prior to installation all 24VDC wires must be present near fixture. Refer to the power supply installation instructions for additional information.*

Static White
Wiring Diagram PDF

RGB/RGBW
Wiring Diagram PDF

Warm Dim
Wiring Diagram PDF

Pixel
Wiring Diagram PDF

Tunable White
Wiring Diagram PDF