

SOLO 11

ACCENT SPOTLIGHT | 48V MULTISYSTEM TRACK

STATIC WHITE | INTENSE



KEY FEATURES

- Beam Options: 11 | 14 | 18 | 30 | 50
- Light Engine Performance: 413lm | 4.20W
- Movement: 360 Pan | 90 Tilt
- Tool-less field changeable optics
- Ultra narrow high intensity beams
- Interchangeable accessories
- UK Part L1 / L2 (Display) Compliant
- Title 24 JA8 Certified



OVERVIEW

Solo 11 Intense 48V DC Track is a Constant Voltage single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has five site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. Our 413lm | 4.20W light engine has a max peak intensity of 7259cd. An accessory holder is available separately that can accommodate 37mm (1.45") lenses and louvers. This product mounts to the 48V DC Stucchi Multisystem Evo Track and requires an external 12V Constant Voltage LED power supply to the track.

PERFORMANCE

	Intense				
	U. Narrow	Narrow	Medium	Flood	W. Flood
FWHM	11°	14°	18°	30°	50°
Luminous Flux	396 lm	413 lm	391 lm	322 lm	317 lm
Peak Intensity	7259 cd	5422 cd	3338 cd	1052 cd	383 cd
CCT	2700K 3000K 3500K 4000K				
CRI Min.	92 92 92 90				
LED Current	0.350 A				
Voltage	48 V				
Input Wattage	4.67 W				
Efficacy	98.3 lm/W				
Driver Type	Constant Voltage Remote AC to 48VDC				
Class	SELV Class III				

ORDER CODE

Model	Type	Output	CCT	Beam Angle	Voltage	Control	Adaptor Finish	Finish
SOL11 Solo 11	MU Multisystem Track	IO Intense Output	27K 2700K	UN Ultra Narrow 11°	48 48V DC	010G 0-10V Log	WH White	WH White
			30K 3000K	NR Narrow 14°		LOC On-board	BK Black	BK Black
			35K 3500K	ME Medium 18°		CAS Casambi		AL Br. Aluminium
			40K 4000K	FL Flood 30°		DALI DALI		RBZ Rubbed Bronze
				WF Wide Flood 50°				BR Br. Brass
								PB Polished Brass

Example code: SOL11-MU-IO-27K-UN-48-010G-WH-WH

See Drivers, Power Supplies and Accessories sections for further order codes

LIGHT ENGINE SELECTION

This product specification sheet references our Intense light engine, this product is also available with Plus and HE static white light engines, please refer to their separate sheets.

▸ intense ▸

Precision's signature intense light engines offer tight, surgical beams combined with the highest peak intensity values available.

- Ultra-tight beams
- High Peak Cd

plus⁺

Precision's plus light engines offer the best balance between delivered lumens, beam quality and outstanding colour rendition.

- Increased Lumen Output
- CRI 98 Typical

HE

Precision's high efficiency light engines deliver the highest possible lumen values as well as our outstanding energy efficiency

- Maximum Lumen Output
- Maximum Energy Efficiency

LIFETIME & ENVIRONMENTAL

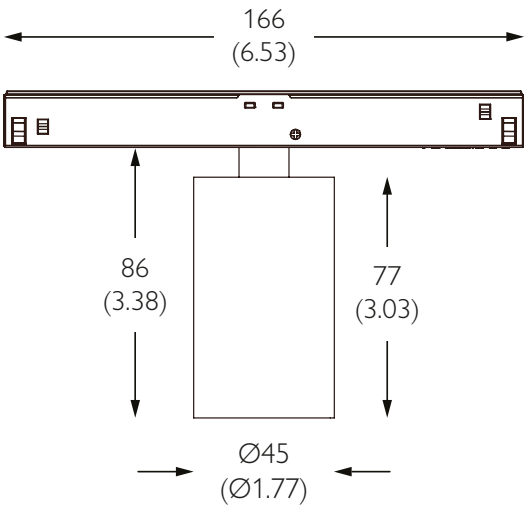
At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

CIBSE TM65	10.77 Kg/CO2e
CIBSE TM66	2.4
RoHS Compliance	Yes
REACH Compliance	Yes
WEEE Compliance	Yes - Registered Producer
Declare	Declared
Lifetime	L90B10 100,000hrs
Warranty	5 Years

UK PART L	
Part L1A / L1B (Dwellings)	Compliant 105 lm/W ≥75 lm/W source lumens Source lm (441 lm) / Source W (4.20 W)
Part L2A (General)	- ≥95lm/W delivered lumens
Part L2A (Display)	Compliant 105 lm/W ≥80 lm/W source lumens Source lm (441 lm) / Source W (4.20 W)

SOLO 11

DIMENSIONS



MECHANICAL

Location	IP20 Indoor Dry Location Only	Cutout	N/A
Mounting	48V Track Recessed Trimless Recessed Surface Suspended	Ceiling Thickness	N/A
Adjustability	360 Pan 90 Tilt	Product Class	SELV Class III
Lockable	Pan	Material	Machined AL 6063-T6 Machined Brass
Accessories	Lenses Louver	Weight	170g 235g* 0.37lb 0.52lb*
		* Brass finishes weight	

FINISHES



100W | Direct to track | Remote | Constant Voltage

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Voltage
Location	IP20 Indoor Location Only
Dimming Control	Direct to track
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	Refer to guide



	All CCT's		L	W	H
Max. Lights	1 to 16	mm	190	52	37
Order Code	PSCV-100-48-N1-MW	in	7.48	2.05	1.46

200W | Direct to track | Remote | Constant Voltage

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Voltage
Location	IP20 Indoor Location Only
Dimming Control	Direct to track
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	Refer to guide



	All CCT's		L	W	H
Max. Lights	1 to 32	mm	195	68	40
Order Code	PSCV-200-48-N1-MW	in	7.68	2.68	1.57

48V TRACK CABLE DISTANCES

100W	A = Distance from power supply to track 2 x 16 AWG (1.5mm²) cable							
	m	ft	m	ft	m	ft	m	ft
	5	16.4	10	32.8	20	65.6	30	98.4
	B = Track Length with max 5.5% V drop							
	m	ft	m	ft	m	ft	m	ft
	50	164	50	164	40	131.2	25	82
	200W	40	131.2	30	98.4	-	-	-

SOLO 11

ACCENT SPOTLIGHT | 48V MULTISYSTEM TRACK

STATIC WHITE | INTENSE

96W | Direct to track | Remote | Constant Voltage

Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Voltage
Location	IP20 Indoor Location Only
Dimming Control	Direct to track
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	Refer to guide



	All CCT's		L	W	H
Max. Lights	1 to 16	mm	220	95	40
Order Code	USCV-96-48-N1-SC-EN	in	8.66	3.74	1.57

48V TRACK CABLE DISTANCES

100W	A = Distance from power supply to track 2 x 16 AWG (1.5mm²) cable							
	m	ft	m	ft	m	ft	m	ft
	5	16.4	10	32.8	20	65.6	30	98.4
	B = Track Length with max 5.5% V drop							
	m	ft	m	ft	m	ft	m	ft
	50	164	50	164	40	131.2	25	82
	200W	40	131.2	30	98.4	-	-	-

SOLO 11

ACCENT SPOTLIGHT | 48V MULTISYSTEM TRACK

STATIC WHITE | INTENSE

OUTPUT SCALING

CCT	Output Multiplier	CRI	R9 Typ.	TM-30: Rf	TM-30: Rg	Max Lm
2400K	-	-	-	-	-	-
2700K	0.90	92	50	90	99	372
3000K	1.00	92	50	90	99	413
3500K	1.00	92	50	90	99	413
4000K	1.00	90	50	90	98	413

Colour Consistency: 2 SDCM at 2700K / 3000K, 3DCM at 3500 / 4000K

PHOTOMETRY

ULTRA NARROW				<table><tr><td>Cd: 0</td><td>1217</td><td>2433</td><td>3650</td><td>4867</td><td>6083</td><td>7300</td></tr><tr><td>10°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>20°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>30°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>40°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Cd: 0	1217	2433	3650	4867	6083	7300	10°							20°							30°							40°							<table><tr><td>0.19m</td><td>7259lx</td><td>807fc</td><td>0.6'</td></tr><tr><td>1m</td><td></td><td>3'</td><td></td></tr><tr><td>0.39m</td><td>1815lx</td><td>202fc</td><td>1.2'</td></tr><tr><td>2m</td><td></td><td>6'</td><td></td></tr><tr><td>0.58m</td><td>807lx</td><td>90fc</td><td>1.7'</td></tr><tr><td>3m</td><td></td><td>9'</td><td></td></tr><tr><td>0.77m</td><td>454lx</td><td>50fc</td><td>2.3'</td></tr><tr><td>4m</td><td></td><td>12'</td><td></td></tr><tr><td>0.96m</td><td>290lx</td><td>32fc</td><td>2.9'</td></tr><tr><td>5m</td><td></td><td>15'</td><td></td></tr><tr><td></td><td></td><td>22fc</td><td>3.5'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.19m	7259lx	807fc	0.6'	1m		3'		0.39m	1815lx	202fc	1.2'	2m		6'		0.58m	807lx	90fc	1.7'	3m		9'		0.77m	454lx	50fc	2.3'	4m		12'		0.96m	290lx	32fc	2.9'	5m		15'				22fc	3.5'				18'
Cd: 0	1217				2433	3650	4867	6083	7300																																																																															
10°																																																																																								
20°																																																																																								
30°																																																																																								
40°																																																																																								
0.19m	7259lx	807fc	0.6'																																																																																					
1m		3'																																																																																						
0.39m	1815lx	202fc	1.2'																																																																																					
2m		6'																																																																																						
0.58m	807lx	90fc	1.7'																																																																																					
3m		9'																																																																																						
0.77m	454lx	50fc	2.3'																																																																																					
4m		12'																																																																																						
0.96m	290lx	32fc	2.9'																																																																																					
5m		15'																																																																																						
		22fc	3.5'																																																																																					
			18'																																																																																					
FWHM	11°																																																																																							
Delivered Flux	396 lm																																																																																							
Peak Intensity	7259 cd																																																																																							

NARROW				<table><tr><td>Cd: 0</td><td>908</td><td>1817</td><td>2725</td><td>3633</td><td>4542</td><td>5450</td></tr><tr><td>10°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>20°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>30°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>40°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Cd: 0	908	1817	2725	3633	4542	5450	10°							20°							30°							40°							<table><tr><td>0.25m</td><td>5422lx</td><td>602fc</td><td>0.7'</td></tr><tr><td>1m</td><td></td><td>3'</td><td></td></tr><tr><td>0.49m</td><td>1356lx</td><td>151fc</td><td>1.5'</td></tr><tr><td>2m</td><td></td><td>6'</td><td></td></tr><tr><td>0.74m</td><td>602lx</td><td>67fc</td><td>2.2'</td></tr><tr><td>3m</td><td></td><td>9'</td><td></td></tr><tr><td>0.98m</td><td>339lx</td><td>38fc</td><td>2.9'</td></tr><tr><td>4m</td><td></td><td>12'</td><td></td></tr><tr><td>1.23m</td><td>217lx</td><td>24fc</td><td>3.7'</td></tr><tr><td>5m</td><td></td><td>15'</td><td></td></tr><tr><td></td><td></td><td>17fc</td><td>4.4'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.25m	5422lx	602fc	0.7'	1m		3'		0.49m	1356lx	151fc	1.5'	2m		6'		0.74m	602lx	67fc	2.2'	3m		9'		0.98m	339lx	38fc	2.9'	4m		12'		1.23m	217lx	24fc	3.7'	5m		15'				17fc	4.4'				18'
Cd: 0	908				1817	2725	3633	4542	5450																																																																															
10°																																																																																								
20°																																																																																								
30°																																																																																								
40°																																																																																								
0.25m	5422lx	602fc	0.7'																																																																																					
1m		3'																																																																																						
0.49m	1356lx	151fc	1.5'																																																																																					
2m		6'																																																																																						
0.74m	602lx	67fc	2.2'																																																																																					
3m		9'																																																																																						
0.98m	339lx	38fc	2.9'																																																																																					
4m		12'																																																																																						
1.23m	217lx	24fc	3.7'																																																																																					
5m		15'																																																																																						
		17fc	4.4'																																																																																					
			18'																																																																																					
FWHM	14°																																																																																							
Delivered Flux	413 lm																																																																																							
Peak Intensity	5422 cd																																																																																							

MEDIUM				<table><tr><td>Cd: 0</td><td>558</td><td>1117</td><td>1675</td><td>2233</td><td>2792</td><td>3350</td></tr><tr><td>10°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>20°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>30°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>40°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Cd: 0	558	1117	1675	2233	2792	3350	10°							20°							30°							40°							<table><tr><td>0.32m</td><td>3338lx</td><td>371fc</td><td>1.0'</td></tr><tr><td>1m</td><td></td><td>3'</td><td></td></tr><tr><td>0.63m</td><td>835lx</td><td>93fc</td><td>1.9'</td></tr><tr><td>2m</td><td></td><td>6'</td><td></td></tr><tr><td>0.95m</td><td>371lx</td><td>41fc</td><td>2.9'</td></tr><tr><td>3m</td><td></td><td>9'</td><td></td></tr><tr><td>1.27m</td><td>209lx</td><td>23fc</td><td>3.8'</td></tr><tr><td>4m</td><td></td><td>12'</td><td></td></tr><tr><td>1.58m</td><td>134lx</td><td>15fc</td><td>4.8'</td></tr><tr><td>5m</td><td></td><td>15'</td><td></td></tr><tr><td></td><td></td><td>10fc</td><td>5.7'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.32m	3338lx	371fc	1.0'	1m		3'		0.63m	835lx	93fc	1.9'	2m		6'		0.95m	371lx	41fc	2.9'	3m		9'		1.27m	209lx	23fc	3.8'	4m		12'		1.58m	134lx	15fc	4.8'	5m		15'				10fc	5.7'				18'
Cd: 0	558				1117	1675	2233	2792	3350																																																																															
10°																																																																																								
20°																																																																																								
30°																																																																																								
40°																																																																																								
0.32m	3338lx	371fc	1.0'																																																																																					
1m		3'																																																																																						
0.63m	835lx	93fc	1.9'																																																																																					
2m		6'																																																																																						
0.95m	371lx	41fc	2.9'																																																																																					
3m		9'																																																																																						
1.27m	209lx	23fc	3.8'																																																																																					
4m		12'																																																																																						
1.58m	134lx	15fc	4.8'																																																																																					
5m		15'																																																																																						
		10fc	5.7'																																																																																					
			18'																																																																																					
FWHM	18°																																																																																							
Delivered Flux	391 lm																																																																																							
Peak Intensity	3338 cd																																																																																							

FLOOD				<table><tr><td>Cd: 0</td><td>183</td><td>367</td><td>550</td><td>733</td><td>917</td><td>1100</td></tr><tr><td>10°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>20°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>30°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>40°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Cd: 0	183	367	550	733	917	1100	10°							20°							30°							40°							<table><tr><td>0.54m</td><td>1052lx</td><td>117fc</td><td>1.6'</td></tr><tr><td>1m</td><td></td><td>3'</td><td></td></tr><tr><td>1.07m</td><td>263lx</td><td>29fc</td><td>3.2'</td></tr><tr><td>2m</td><td></td><td>6'</td><td></td></tr><tr><td>1.61m</td><td>117lx</td><td>13fc</td><td>4.8'</td></tr><tr><td>3m</td><td></td><td>9'</td><td></td></tr><tr><td>2.14m</td><td>66lx</td><td>7fc</td><td>6.4'</td></tr><tr><td>4m</td><td></td><td>12'</td><td></td></tr><tr><td>2.68m</td><td>42lx</td><td>5fc</td><td>8.0'</td></tr><tr><td>5m</td><td></td><td>15'</td><td></td></tr><tr><td></td><td></td><td>3fc</td><td>9.6'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.54m	1052lx	117fc	1.6'	1m		3'		1.07m	263lx	29fc	3.2'	2m		6'		1.61m	117lx	13fc	4.8'	3m		9'		2.14m	66lx	7fc	6.4'	4m		12'		2.68m	42lx	5fc	8.0'	5m		15'				3fc	9.6'				18'
Cd: 0	183				367	550	733	917	1100																																																																															
10°																																																																																								
20°																																																																																								
30°																																																																																								
40°																																																																																								
0.54m	1052lx	117fc	1.6'																																																																																					
1m		3'																																																																																						
1.07m	263lx	29fc	3.2'																																																																																					
2m		6'																																																																																						
1.61m	117lx	13fc	4.8'																																																																																					
3m		9'																																																																																						
2.14m	66lx	7fc	6.4'																																																																																					
4m		12'																																																																																						
2.68m	42lx	5fc	8.0'																																																																																					
5m		15'																																																																																						
		3fc	9.6'																																																																																					
			18'																																																																																					
FWHM	30°																																																																																							
Delivered Flux	322 lm																																																																																							
Peak Intensity	1052 cd																																																																																							

WIDE FLOOD				<table><tr><td>Cd: 0</td><td>67</td><td>133</td><td>200</td><td>267</td><td>333</td><td>400</td></tr><tr><td>10°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>20°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>30°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>40°</td><td></td><td></td><td></td><td></td><td></td><td></td></tr></table>	Cd: 0	67	133	200	267	333	400	10°							20°							30°							40°							<table><tr><td>0.93m</td><td>383lx</td><td>43fc</td><td>2.8'</td></tr><tr><td>1m</td><td></td><td>3'</td><td></td></tr><tr><td>1.87m</td><td>96lx</td><td>11fc</td><td>5.6'</td></tr><tr><td>2m</td><td></td><td>6'</td><td></td></tr><tr><td>2.80m</td><td>43lx</td><td>5fc</td><td>8.4'</td></tr><tr><td>3m</td><td></td><td>9'</td><td></td></tr><tr><td>3.73m</td><td>24lx</td><td>3fc</td><td>11.2'</td></tr><tr><td>4m</td><td></td><td>12'</td><td></td></tr><tr><td>4.66m</td><td>15lx</td><td>2fc</td><td>14.0'</td></tr><tr><td>5m</td><td></td><td>15'</td><td></td></tr><tr><td></td><td></td><td>1fc</td><td>16.8'</td></tr><tr><td></td><td></td><td></td><td>18'</td></tr></table>	0.93m	383lx	43fc	2.8'	1m		3'		1.87m	96lx	11fc	5.6'	2m		6'		2.80m	43lx	5fc	8.4'	3m		9'		3.73m	24lx	3fc	11.2'	4m		12'		4.66m	15lx	2fc	14.0'	5m		15'				1fc	16.8'				18'
Cd: 0	67				133	200	267	333	400																																																																															
10°																																																																																								
20°																																																																																								
30°																																																																																								
40°																																																																																								
0.93m	383lx	43fc	2.8'																																																																																					
1m		3'																																																																																						
1.87m	96lx	11fc	5.6'																																																																																					
2m		6'																																																																																						
2.80m	43lx	5fc	8.4'																																																																																					
3m		9'																																																																																						
3.73m	24lx	3fc	11.2'																																																																																					
4m		12'																																																																																						
4.66m	15lx	2fc	14.0'																																																																																					
5m		15'																																																																																						
		1fc	16.8'																																																																																					
			18'																																																																																					
FWHM	50°																																																																																							
Delivered Flux	317 lm																																																																																							
Peak Intensity	383 cd																																																																																							

DOUBLE ACCESSORY HOLDER

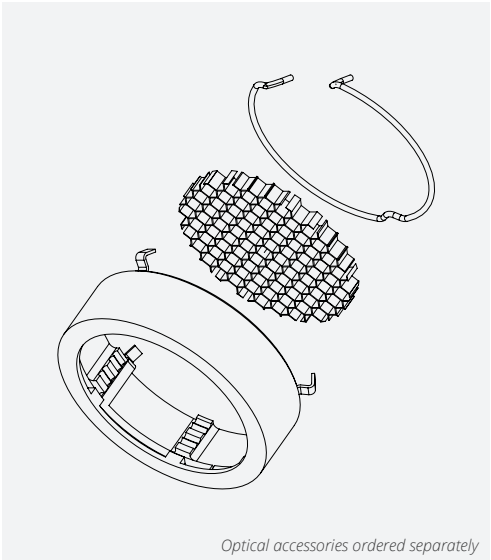


The Double Accessory Holder 244-BK (sold separately) greatly enhances Solo 11's optical accessory capacity providing space for up to two additional accessories. It snaps in and out of the fixture's snout without the need for tools, making on-site adjustments quick and simple.

Accessory Diameter	Ø37 mm 1.45"
Capacity	8.0 mm 0.31" Max. Thickness
Orientation Index	No
Weight	TBC

Ordering Codes

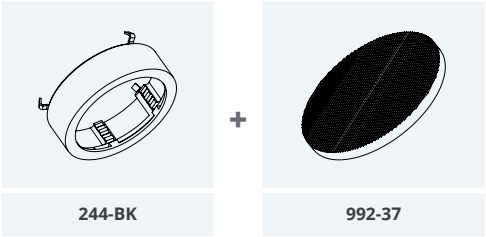
	Black	244-BK
--	-------	--------




Optical accessories ordered separately

* N.B. - Custom RAL, Brass and Brozne finishes subject to extended lead times

Ø37MM LINEAR SPREAD LENS





- The Linear Spread Lens **992-37** is a prismatic glass lens that can be used to create asymmetric linear beam effects
- It must be used in conjunction with the Single Accessory Holder **244-BK**
- Using narrower base optics will produce a longer, thinner beam
- The beam is spread widest perpendicular to the disc's vertical stripes (see *fig. 1*)



	Ultra Narrow (11°)	Narrow (14°)	Medium (18°)	Flood (30°)	Wide Flood (50°)
Distribution Angle	10° x 54°	12° x 43°	17° x 53°	28° x 68°	40° x 75°
Delivered Flux	255 lm	253 lm	245 lm	207 lm	160 lm
Peak Intensity	1,320 Cd	1,183 Cd	756 Cd	349 Cd	165 Cd
Efficiency	60.7 lm/W	60.2 lm/W	58.3 lm/W	49.3 lm/W	66.6 lm/W
Efficiency Multiplier	x 0.64	x 0.61	x 0.63	x 0.64	x 0.50






OPTICS

There are 5 tool-less interchangeable optics, cross reference the text on the optic disc for beam.

Optic Disc	Optic Disc	Optic Disc	Optic Disc	Optic Disc
				
Ultra Narrow Disc FWHM 11 deg Order Code 911-01	Narrow Disc FWHM 14 deg Order Code 911-02	Medium Disc FWHM 18 deg Order Code 911-03	Flood Disc FWHM 30 deg Order Code 911-04	Wide Flood Disc FWHM 50 deg Order Code 911-05

ACCESSORIES

This product can hold 2 x accessories using the double accessory holder. Accessories are pre-installed unless otherwise requested.

Accessory Holder	Glare Control	Beam Shaping	Beam Shaping	Colour Change
				
Double Accessory Holder W43xH14mm W1.69xH0.55" Order Code 244-BK	Honeycomb Louver W37xH3.2mm W1.46xH0.13" Order Code 995-37-BK	Softening Lens W37xH3.2mm W1.46xH0.13" Order Code 991-37	Linear Lens W37xH3.2mm W1.46xH0.13" Order Code 992-37	1/4 CTO W37xH1.8mm W1.46xH0.07" Order Code 997-1/4CTO-37

Colour Change

Custom Colour Filter W37xH1.8mm W1.46xH0.07" Order Code Contact Sales Rep

Linear	Softening	1/4 CTO	Honeycomb
			
			
Clip Included with holder	Accessory	Double Accessory Holder Can hold 2 accessories	