



## KEY FEATURES

Beam Options: 17 | 24 | 35 | 50  
Light Engine Performance: 461lm | 6.00W  
Movement: 360 Pan | 90 Tilt  
Tool-less field changeable optics  
Interchangeable accessories  
Ultra-high CRI  
UK Part L1 / L2 (Display) Compliant  
Title 24 JA8 Certified



## OVERVIEW

Solo 8 Plus Surface is a Constant Current single source LED spotlight that is machined from aerospace grade aluminium 6063-T6 and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has four site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. Our 461lm | 6.00W light engine has a max peak intensity of 3738cd. This product requires an external 0.35mA 17.15V Constant Current LED driver.

## PERFORMANCE

	Plus			
	Narrow	Medium	Wide	V. Wide
FWHM	17°	24°	35°	50°
Luminous Flux	405 lm	440 lm	461 lm	415 lm
Peak Intensity	3738 cd	2468 cd	1253 cd	591 cd
CCT	2400K   2700K   3000K   3500K   4000K			
CRI Min.	90   98   98   98   95			
LED Current		0.350 A		
Voltage		17.15 V		
Input Wattage		6 W		
Efficacy		76.8 lm/W		
Driver Type		Constant Current   Remote		
Class		SELV   Class III		

## ORDER CODE

Model	-	Type	-	Output	-	CCT	-	Beam Angle	-	Finish	
<b>SOL08</b>	<b>Solo 08</b>	<b>SP</b>	<b>Surface Plate</b>	<b>PL</b>	<b>Plus</b>	<b>24K</b>	<b>2400K</b>	<b>NR</b>	<b>Narrow 17°</b>	<b>WH</b>	<b>White</b>
						<b>27K</b>	<b>2700K</b>	<b>ME</b>	<b>Medium 24°</b>	<b>BK</b>	<b>Black</b>
						<b>30K</b>	<b>3000K</b>	<b>WD</b>	<b>Wide 35°</b>	<b>AL</b>	<b>Br. Aluminium</b>
						<b>35K</b>	<b>3500K</b>	<b>VW</b>	<b>Very Wide 50°</b>	<b>RBZ</b>	<b>Rubbed Bronze</b>
						<b>40K</b>	<b>4000K</b>			<b>BR</b>	<b>Br. Brass</b>
										<b>PB</b>	<b>Polished Brass</b>

**Example code:** SOL08-SP-PL-24K-NR-WH

See Drivers, Power Supplies and Accessories sections for further order codes

## LIGHT ENGINE SELECTION

This product specification sheet references our Plus light engine, this product is also available with a HE static white light engine, please refer to is separate specification sheet.

### plus<sup>+</sup>

Precisions plus light engines offer the best balance between delivered lumens, beam quality and outstanding colour rendition.

- Increased Lumen Output
- CRI 98 Typical

### HE

Precisions high efficiency light engines deliver the highest possible lumen values as well as our outstanding energy efficiency

- Maximum Lumen Output
- Maximum Energy Efficiency


## LIFETIME & ENVIRONMENTAL

At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

CIBSE TM65	8.18 Kg/CO2e
CIBSE TM66	2.4
RoHS Compliance	Yes
REACH Compliance	Yes
WEEE Compliance	Yes - Registered Producer
Declare	Declared
Lifetime	L90B10 50,000hrs
Warranty	5 Years

UK PART L	
<b>Part L1A / L1B (Dwellings)</b> ≥75 lm/W source lumens	Compliant 121 lm/W Source lm (726 lm) / Source W (6.00 W)
<b>Part L2A (General)</b> ≥95 lm/W delivered lumens	-
<b>Part L2A (Display)</b> ≥80 lm/W source lumens	Compliant 121 lm/W Source lm (726 lm) / Source W (6.00 W)

## DIMENSIONS

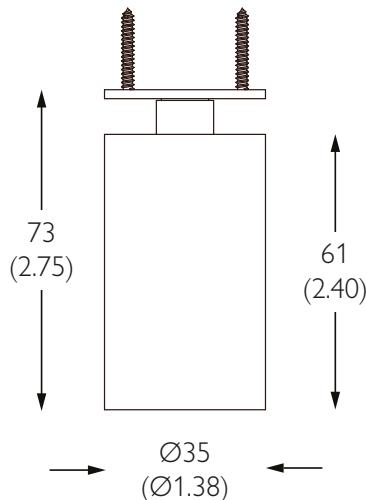

## MECHANICAL

<b>Location</b>	IP20   Indoor Dry Location Only	<b>Cutout</b>	N/A
<b>Mounting</b>	Surface mounting plate	<b>Ceiling Thickness</b>	N/A
<b>Adjustability</b>	360 Pan   90 Tilt	<b>Product Class</b>	SELV   Class III
<b>Lockable</b>	Pan	<b>Material</b>	Machined AL 6063-T6   Machined Brass
<b>Accessories</b>	Louver   Lenses	<b>Weight</b>	82g   0.18lb

## FINISHES



## 20W | 0-10V | Remote | Constant Current

Input Voltage	230VAC   50/60 Hz
Driver Type	Remote   Constant Current
Location	IP20   Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible   No Observable Effect
Wiring Distance	16 AWG - 36m (118')   18 AWG 22m (72')



## 20W | DALI-2 | Remote | Constant Current

Input Voltage	230VAC   50/60 Hz
Driver Type	Remote   Constant Current
Location	IP20   Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible   No Observable Effect
Wiring Distance	16 AWG - 36m (118')   18 AWG 22m (72')



	All CCT's	L	W	H
Max. Lights	1 to 2 in series	mm	160	41
Order Code	PSCC-20-350-A-EL	in	6.3	1.61

# SOLO 08


precision  
by luminii

ACCENT SPOTLIGHT | SURFACE MOUNT

STATIC WHITE | **PLUS**

## 30W | 0-10V | Remote | Constant Current


Input Voltage	120-277V   50/60 Hz
Driver Type	Remote   Constant Current
Location	IP20   Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible   No Observable Effect
Wiring Distance	16 AWG - 36m (118')   18 AWG 22m (72')

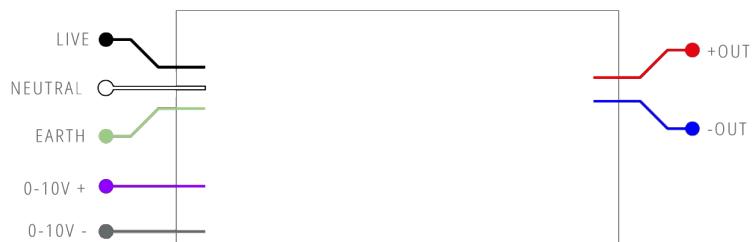

	All CCT's	L	W	H
Max. Lights	1 to 2 in series	mm	348	65
Order Code	USCC-30-350-A-EL-ENC	in	13.7	2.56
			1.85	

## 30W | DALI-2 | Remote | Constant Current


Input Voltage	120-277V   50/60 Hz
Driver Type	Remote   Constant Current
Location	IP20   Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible   No Observable Effect
Wiring Distance	16 AWG - 36m (118')   18 AWG 22m (72')

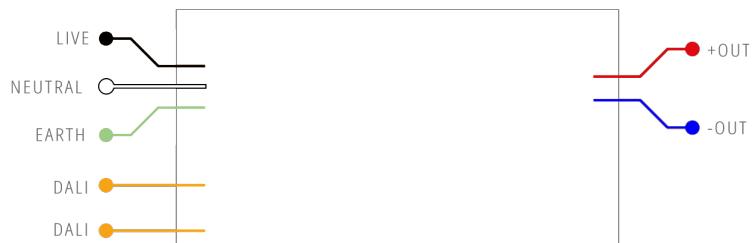

	All CCT's	L	W	H
Max. Lights	1 to 2 in series	mm	348	65
Order Code	USCC-30-350-D-EL-ENC	in	13.7	2.56
			1.85	

## 12W | Phase | Remote | Constant Current

Input Voltage	120V   50/60Hz
Driver Type	Remote   Constant Current
Location	IP20   Indoor Location Only
Dimming Control	Phase
Min. Dim Level	1.0%
Flicker	IEEE P1789 Compatible   No Observable Effect
Wiring Distance	16 AWG - 14m (46')   18 AWG 9m (30')

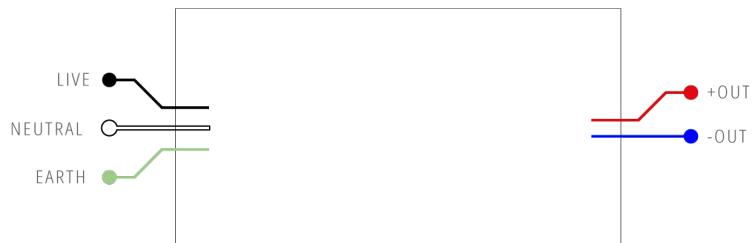


	All CCT's	L	W	H
Max. Lights	1 only	mm	247	65
Order Code	USCC-12-350-P-HT-ENC	in	9.72	2.56
			1.85	


**OUTPUT SCALING**

CCT	Output Multiplier	CRI	R9 Typ.	TM-30: Rf	TM-30: Rg	Max Lm
2400K	0.97	90	90	90	99	447
2700K	0.93	98	95	95	101	429
3000K	1.00	98	95	95	100	461
3500K	1.05	98	92	95	99	484
4000K	1.05	95	90	90	99	484

Colour Consistency: 2 SDCM

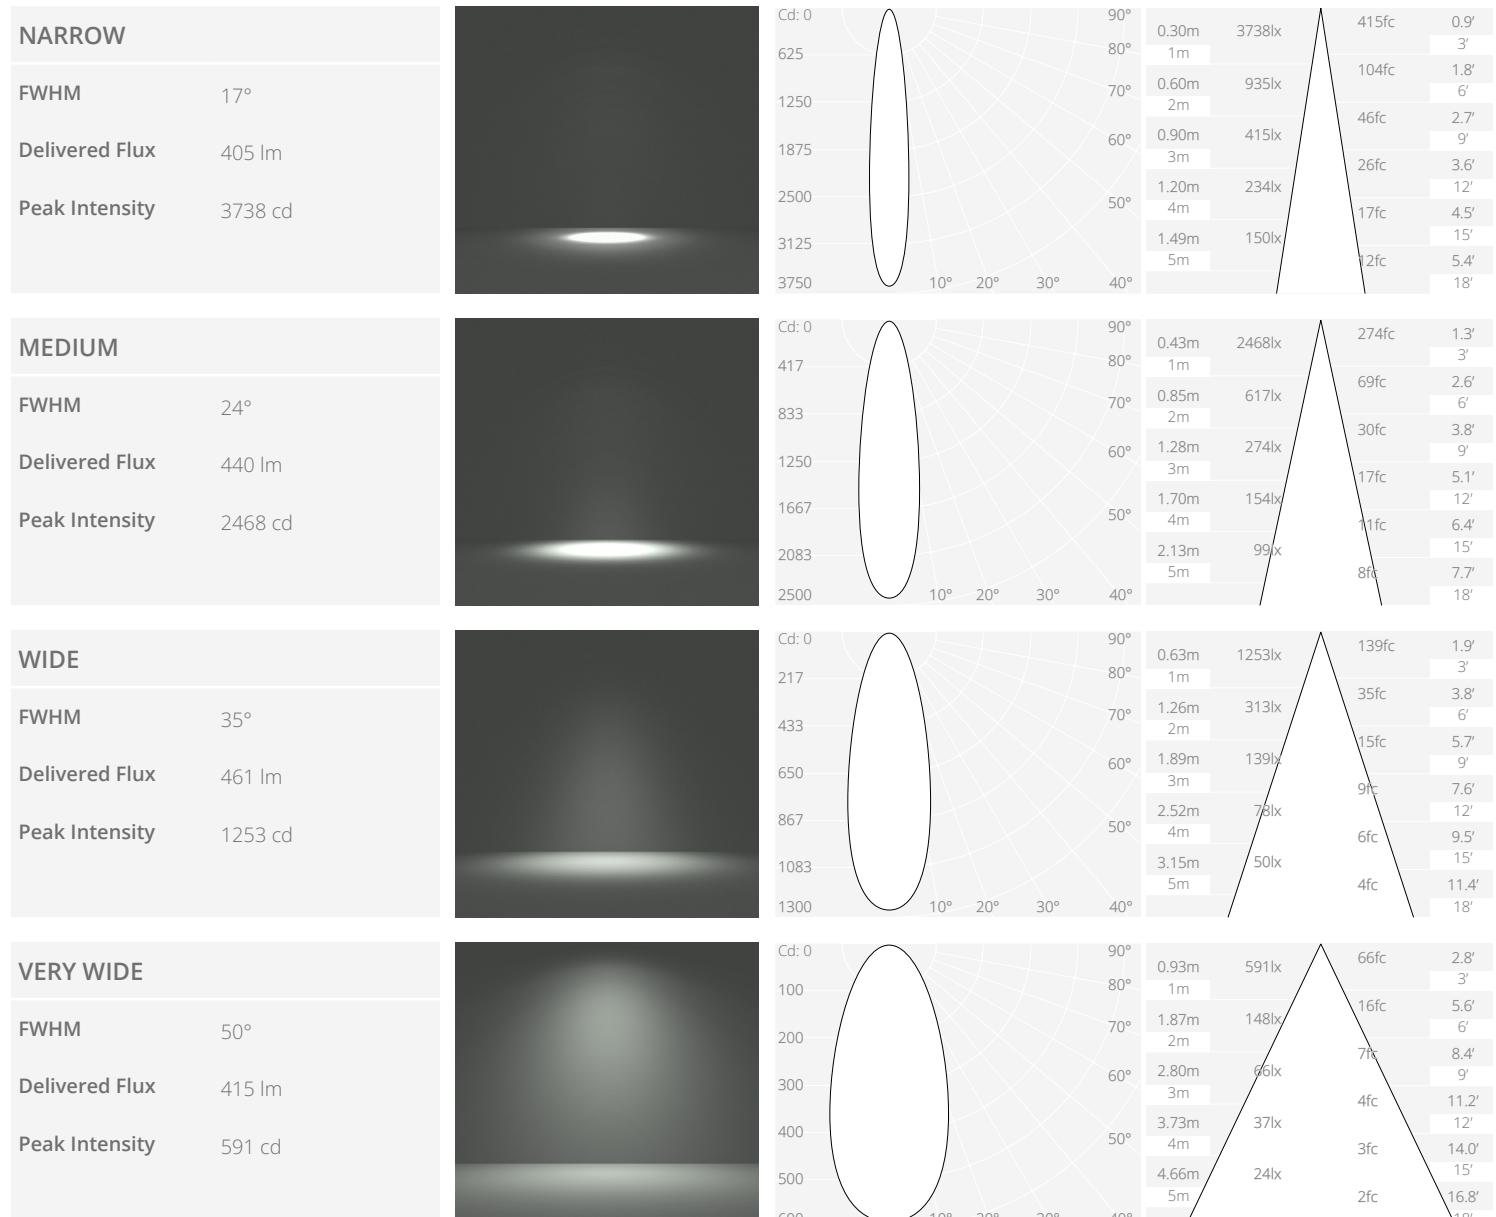**PHOTOMETRY**

## GLARE GUARD ACCESSORY HOLDER

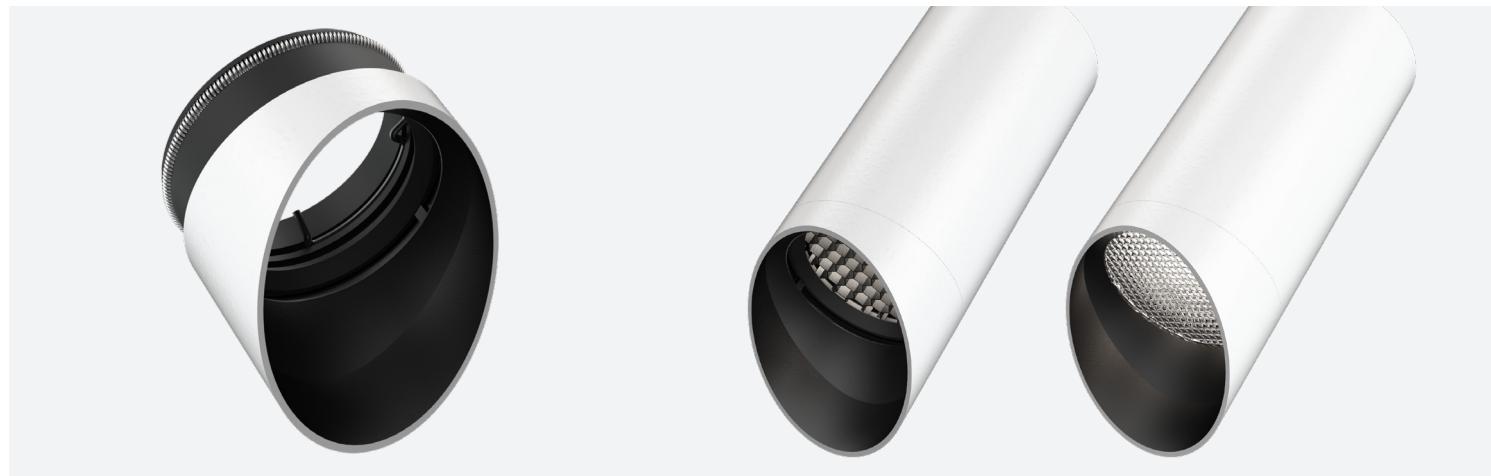


The Glare Guard Accessory Holder is an angled, snap-in snoot extension capable of holding a range of optical accessories, including honeycombs, gels, and beam shaping optics such as Wallwash and Linear Spread Lenses. The holder comprises of two halves, a front compartment and a rear compartment. The rear compartment is capable of holding a single accessory, whilst the front compartment is used to hold orientation dependent beam shaping optics such as the Wallwash and Linear Spread lens.

	a. Front Compartment	b. Rear Compartment
Accessory Diameter	Ø30 mm   1.18"	Ø25 mm   0.98"
Capacity	1.2mm   0.05" Max. Thickness	3.2mm   0.125" Max. Thickness
Orientation Indexing	Yes - Alignment Notches	No
Weight	Aluminium: 120g   Brass: 290g	


### Ordering Codes

	Black	1110-GLR-01-BK		Polished Brass *	1110-GLR-02-PB
	Traffic White	1110-GLR-01-TW		Brushed Brass*	1110-GLR-02-SB
	Brushed Aluminium	1110-GLR-01-AL		Rubbed Bronze *	1110-GLR-02-RB

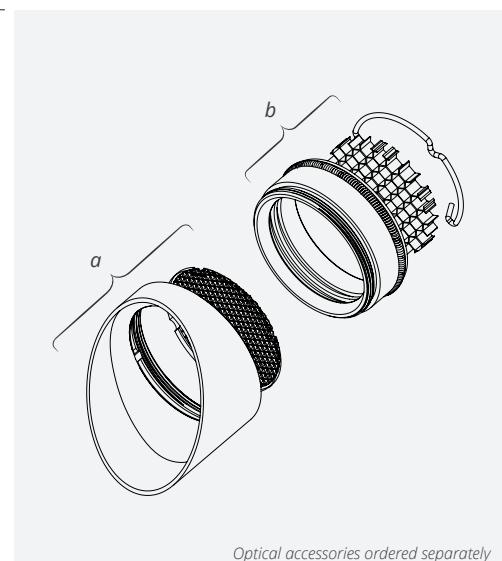


Optical accessories ordered separately

\* N.B. - Custom RAL, Brass and Brozne finishes subject to extended lead times

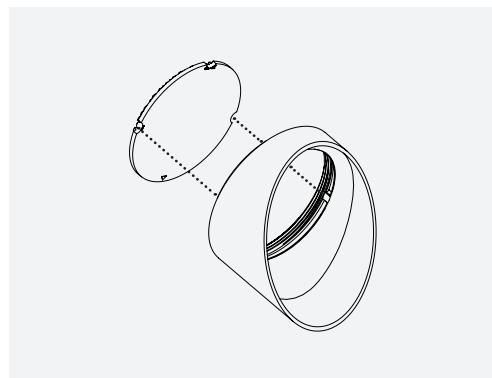


### Orientation Indexing

Orientation indexing is not available with this accessory holder, please align accessories by eye. Ensure that discs are installed with their textured side facing inwards towards LED.

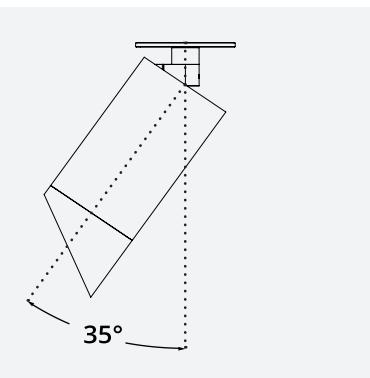

### Wallwash Fixture Angle

For optimum performance, the fixture should be angled at approx. 35° from the vertical plane.

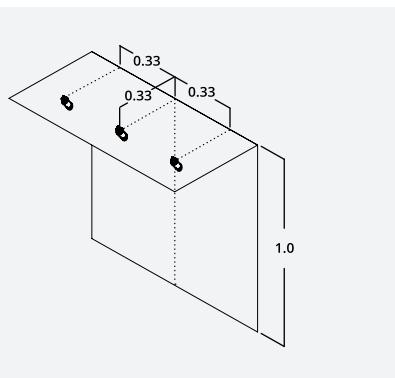

### Wallwash Positioning and Pitch

Wallwash fixtures should be positioned one-third of the ceiling height away from the wall and spaced apart by the same distance.

**plus<sup>+</sup>**


## WALLWASH PHOTOMETRY



+



+





Solo 08 Plus

1110-GLR-01-AL

HKFD-30-WAS-1




- Recommended max. wall height is 1.00m / 3.28 ft
- Recommended set back and fixture spacing is 0.33m / 1.08 ft
- Recommended base optics are Medium 24° or Wide 36°
- The Wallwash Disc **HKFD-30-WAS-1** can only be used in combination with the Glare Guard Accessory Holder **1110-GLR-XX-XX**
- Follow the set back and fixture spacing rules outlined on page 10 - results may vary depending on your application

Base Optic	Narrow (17°)
Distribution Angle	22° x 49°
Delivered Flux	300 lm
Peak Intensity	751 Cd
Efficiency	50 lm/W
Efficiency Multiplier	x 0.74

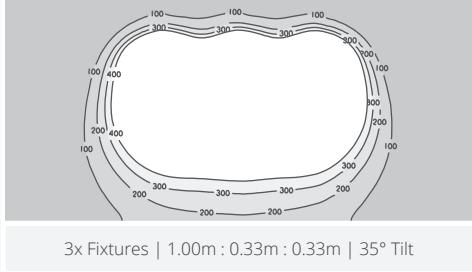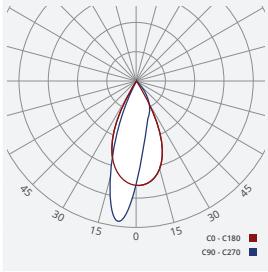



3x Fixtures | 1.00m : 0.33m : 0.33m | 35° Tilt

Base Optic	Medium (24°)
Distribution Angle	27° x 51°
Delivered Flux	309 lm
Peak Intensity	628 Cd
Efficiency	51.5 lm/W
Efficiency Multiplier	x 0.70

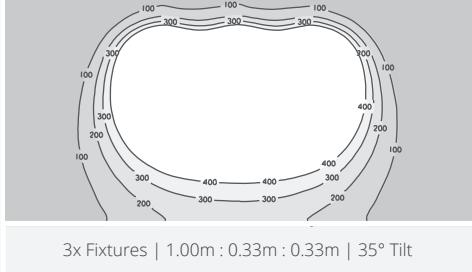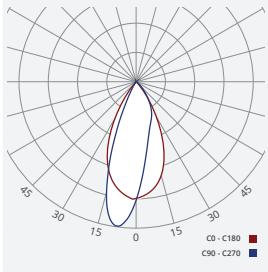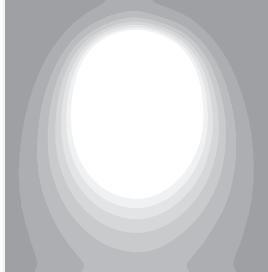



3x Fixtures | 1.00m : 0.33m : 0.33m | 35° Tilt

Base Optic	Wide (35°)
Distribution Angle	37° x 55°
Delivered Flux	310 lm
Peak Intensity	472 Cd
Efficiency	51.6 lm/W
Efficiency Multiplier	x 0.67

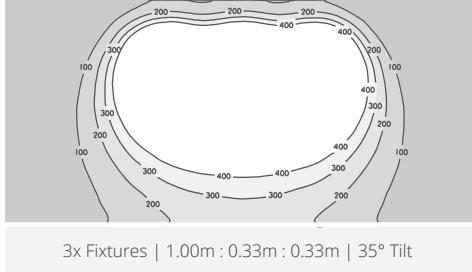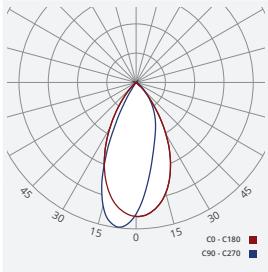

3x Fixtures | 1.00m : 0.33m : 0.33m | 35° Tilt

Base Optic	Very Wide (50°)
Distribution Angle	46° x 58°
Delivered Flux	228 lm
Peak Intensity	276 Cd
Efficiency	38 lm/W
Efficiency Multiplier	x 0.55

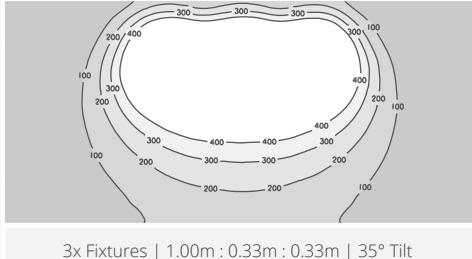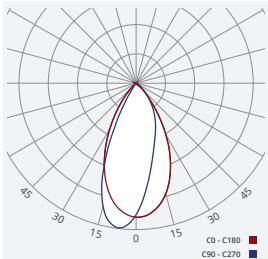

3x Fixtures | 1.00m : 0.33m : 0.33m | 35° Tilt

Digital photometric files available as .LDT format.

Contact your sales rep or visit [www.luminii.com](http://www.luminii.com) for more information.



## SNOOT ACCESSORY HOLDER



The Single Accessory Holder (sold separately) enhances the Solo 08's optical accessory capacity while adding decorative trim in a variety of complementary finishes. Its snap-in, snap-out mechanism is completely tool-free, making on-site adjustments simple and ensuring the holder fits flush with the snoot's front edge.

---

<b>Accessory Diameter</b>	Ø30 mm   1.18"
<b>Capacity</b>	3.2 mm   0.12" Max. Thickness
<b>Orientation Index</b>	No
<b>Weight</b>	Aluminum 60g   Brass 170g

### Ordering Codes

	<b>Black</b>	1110-HOL-01-BK		<b>Polished Brass *</b>	1110-HOL-02-PB
	<b>Traffic White</b>	1110-HOL-01-TW		<b>Brushed Brass *</b>	1110-HOL-02-SB
	<b>Brushed Aluminium</b>	1110-HOL-01-AL		<b>Rubbed Bronze *</b>	1110-HOL-02-RB




*Optical accessories ordered separately*

\* N.B. - Custom RAL, Brass and Bronze finishes subject to extended lead times

## Ø25MM LINEAR SPREAD LENS




+



1110-HOL-XX-XX

HKFD-25-LIN-1


- The Linear Spread Lens **HKFD-25-LIN-1** is a micoprismatic PMMA lens that can be used to create asymmetric linear beam effects
- For best performance, use in conjunction with the Snoot Accessory Holder **1110-HOL-XX-XX**
- Using narrower base optics will produce a longer, thinner beam
- The beam is spread widest perpendicular to the disc's vertical stripes (see *fig. 1*)



*fig. 1*



**plus<sup>+</sup>**

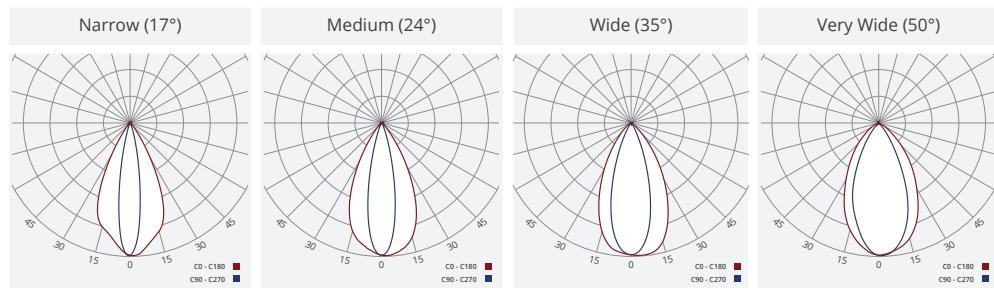

Distribution Angle	18° x 51°	23° x 53°	33° x 57°	46° x 63°
Delivered Flux	366 lm	380 lm	398 lm	334 lm
Peak Intensity	1,214 Cd	957 Cd	649 Cd	367 Cd
Efficiency	61.0 lm/W	63.3 lm/W	66.3 lm/W	61.1 lm/W
Efficiency Multiplier	x 0.90	x 0.86	x 0.86	x 0.80





## OPTICS


There are 4 interchangeable optics, cross reference the molded ID on the optic for beam option.

Optic	Optic	Optic	Optic
			
<b>Narrow TIR Optic</b>	<b>Medium TIR Optic</b>	<b>Wide TIR Optic</b>	<b>Very Wide TIR Optic</b>
Molded ID 15   FWHM 17	Molded ID 24   FWHM 24	Molded ID 36   FWHM 35	Molded ID 50   FWHM 35
Order Code	Order Code	Order Code	Order Code
HKHG-25-15-PMMA	HKHG-25-24-PMMA	HKHG-25-36-PMMA	HKHG-25-50-PMMA

## ACCESSORIES

This product can hold 2 x accessories within the integrated holder. To accommodate additional accessories please contact our sales team. Accessories are pre-installed unless otherwise requested.

Glare Control	Beam Shaping	Beam Shaping	Colour Change	Colour Change
				
<b>Honeycomb Louver</b>	<b>Softening Lens</b>	<b>Linear Lens</b>	<b>1/4 CTO</b>	<b>Custom Colour Filter</b>
W25xH3.2mm   W0.98xH0.13"	W25xH1.5mm   W0.98xH0.06"	W25xH1.5mm   W0.98xH0.06"	W25xH1.8mm   W0.98xH0.07"	W25xH1.8mm   W0.98xH0.07"
Order Code	Order Code	Order Code	Order Code	Order Code
995-25-BK	HKFD-25-SMO-1	HKFD-25-LIN-1	997-1/4CTO-25	Contact Sales Rep

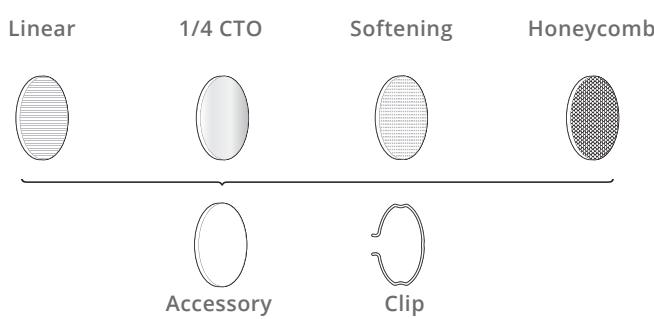

Included with luminaire