

SOLO 8 TUNABLE WHITE 48V DC TRACK

precision
by luminii

PRODUCT OVERVIEW



TUNABLE WHITE LIGHT ENGINE

KEY FEATURES

Beam Options: 25 | 33 | 48
Light Engine Performance: 384lm | 6.58W
Movement: 360 Pan | 90 Tilt
Tool-less field changeable optics
Interchangeable accessories
2 Channel tunable CCT
UK Part L1 / L2 (Display) Compliant
Title 24 JA8 Certified



OVERVIEW

Solo 8 Tunable White 48V DC Track is a Constant Voltage LED spotlight with the option of 2 CCT tuning ranges (1800-3000K / 2700-5000K) and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has three site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. Our 384lm | 6.58W light engine has a max peak intensity of 1475cd. This product mounts to the 48V DC Stucchi Multisystem Evo Track and requires an external 35V Constant Voltage LED power supply to the track.

PERFORMANCE

	Tunable White		
	Medium	Wide	V. Wide
FWHM	25°	33°	48°
Luminous Flux	356 lm	366 lm	384 lm
Peak Intensity	1475 cd	1045 cd	645 cd
CCT	1800-3000K 2700-5000K		
CRI Min.	92 92		
LED Current	0.188 A		
Voltage	48 V		
Input Wattage	7.31 W		
Efficacy	58.4 lm/W		
Driver Type	Constant Voltage Remote AC to 48VDC		
Class	SELV Class III		

ORDER CODE

Model	-	Type	-	Output	-	CCT	-	Beam Angle	-	Voltage	-	Control	-	Adaptor Finish	-	Finish
SOL08 Solo 08	MU Multisystem Track	TWSO Tunable White		18K30K 1800K-3000K	ME Medium 25°		48 48V DC	DALI	DALI DT6	WH	White		WH	White		
				27K50K 2700K-5000K	WD Wide 33°			DALI8	DALI DT8	BK	Black		BK	Black		
					VW Very Wide 48°								AL	Br. Aluminium		
													RBZ	Rubbed Bronze		
													BR	Br. Brass		
													PB	Polished Brass		

Example code: SOL08-MU-TWSO-18K30K-ME-48-DALI-WH-WH

See Drivers, Power Supplies and Accessories sections for further order codes

LIGHT ENGINE SELECTION

This product specification sheet references our 2 channel Tunable White light engine, for Warm Dim please refer to its separate specification sheet.

tunable/**WHITE**

Allows users to adjust the correlated colour temperature (CCT) of their light on demand, with options for analogue, digital, or wireless control. Tuning ranges are available to suit a range of applications.

- 1800K - 3000K
- 2700K - 5000K

LIFETIME & ENVIRONMENTAL

At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

CIBSE TM65	8.77 Kg/CO2e
CIBSE TM66	2.4
RoHS Compliance	Yes
REACH Compliance	Yes
WEEE Compliance	Yes - Registered Producer
Declare	Declared
Lifetime	L90B10 50,000hrs
Warranty	5 Years

UK PART L	
Part L1A / L1B (Dwellings) ≥75 lm/W source lumens	Compliant 110 lm/W Source lm (724 lm) / Source W (6.58 W)
Part L2A (General) ≥95 lm/W delivered lumens	-
Part L2A (Display) ≥80 lm/W source lumens	Compliant 110 lm/W Source lm (724 lm) / Source W (6.58 W)


SOLO 8 TUNABLE WHITE 48V DC TRACK

precision
by luminii

DIMENSIONS & FINISHES

TUNABLE WHITE LIGHT ENGINE

DIMENSIONS

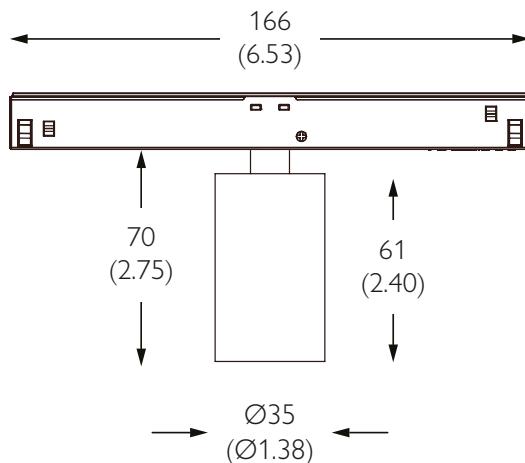

MECHANICAL

Location	IP20 Indoor Dry Location Only	Cutout	N/A
Mounting	48V Track Recessed Trimless Recessed Surface Suspended	Ceiling Thickness	N/A
Adjustability	360 Pan 90 Tilt	Product Class	SELV Class III
Lockable	Pan	Material	Machined AL 6063-T6 Machined Brass
Accessories	Louver Lenses	Weight	102g 0.22lb

** Brass finishes weight*

FINISHES



SOLO 8 TUNABLE WHITE 48V DC TRACK


precision
by luminii

DRIVERS & POWER SUPPLIES – UK, EU, MIDDLE EAST, ASIA, PACIFIC

TUNABLE WHITE LIGHT ENGINE

100W | Direct to track | Remote | Constant Voltage

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Voltage
Location	IP20 Indoor Location Only
Dimming Control	Direct to track
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	Refer to guide

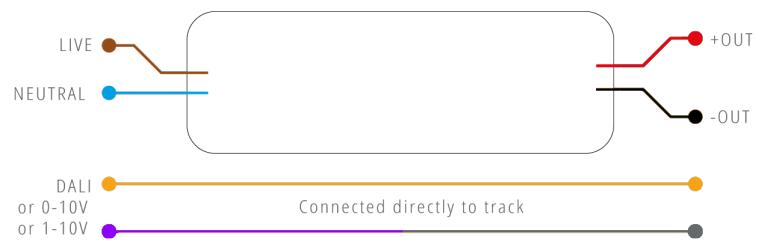

	All CCT's	L	W	H
Max. Lights	1 to 12	mm	190	52
Order Code	PSCV-100-48-N1-MW	in	7.48	2.05
				1.46

200W | Direct to track | Remote | Constant Voltage

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Voltage
Location	IP20 Indoor Location Only
Dimming Control	Direct to track
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	Refer to guide



	All CCT's	L	W	H
Max. Lights	1 to 24	mm	195	68
Order Code	PSCV-200-48-N1-MW	in	7.68	2.68
				1.57

48V TRACK CABLE DISTANCES

A = Distance from power supply to track 2 x 16 AWG (1.5mm²) cable

	m	ft	m	ft	m	ft	m	ft
	5	16.4	10	32.8	20	65.6	30	98.4

B = Track Length with max 5.5% V drop

	m	ft	m	ft	m	ft	m	ft
100W	50	164	50	164	40	131.2	25	82
200W	40	131.2	30	98.4	-	-	-	-

SOLO 8 TUNABLE WHITE 48V DC TRACK

precision
by luminii

DRIVERS & POWER SUPPLIES – NORTH AMERICA

TUNABLE WHITE LIGHT ENGINE

96W | Direct to track | Remote | Constant Voltage

Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Voltage
Location	IP20 Indoor Location Only
Dimming Control	Direct to track
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	Refer to guide



	All CCT's		L	W	H
Max. Lights	1 to 11	mm	220	95	40
Order Code	USCV-96-48-N1-SC-EN	in	8.66	3.74	1.57

48V TRACK CABLE DISTANCES

A = Distance from power supply to track 2 x 16 AWG (1.5mm²) cable

	m	ft	m	ft	m	ft	m	ft
	5	16.4	10	32.8	20	65.6	30	98.4

B = Track Length with max 5.5% V drop

	m	ft	m	ft	m	ft	m	ft
100W	50	164	50	164	40	131.2	25	82
200W	40	131.2	30	98.4	-	-	-	-

SOLO 8 TUNABLE WHITE 48V DC TRACK

precision
by luminii

PHOTOMETRY


TUNABLE WHITE LIGHT ENGINE

OUTPUT SCALING

CCT	Output Multiplier	CRI	R9 Typ.	TM-30: Rf	TM-30: Rg	Max Lm
1800K	0.57	92	68	90	99	219
2400K	0.77	92	80	90	99	296
3000K	1.00	92	75	90	99	384
4000K	1.05	91	70	89	101	403
5000K	1.06	91	65	89	99	407

Colour Consistency: 3 SDCM at 3000K

PHOTOMETRY

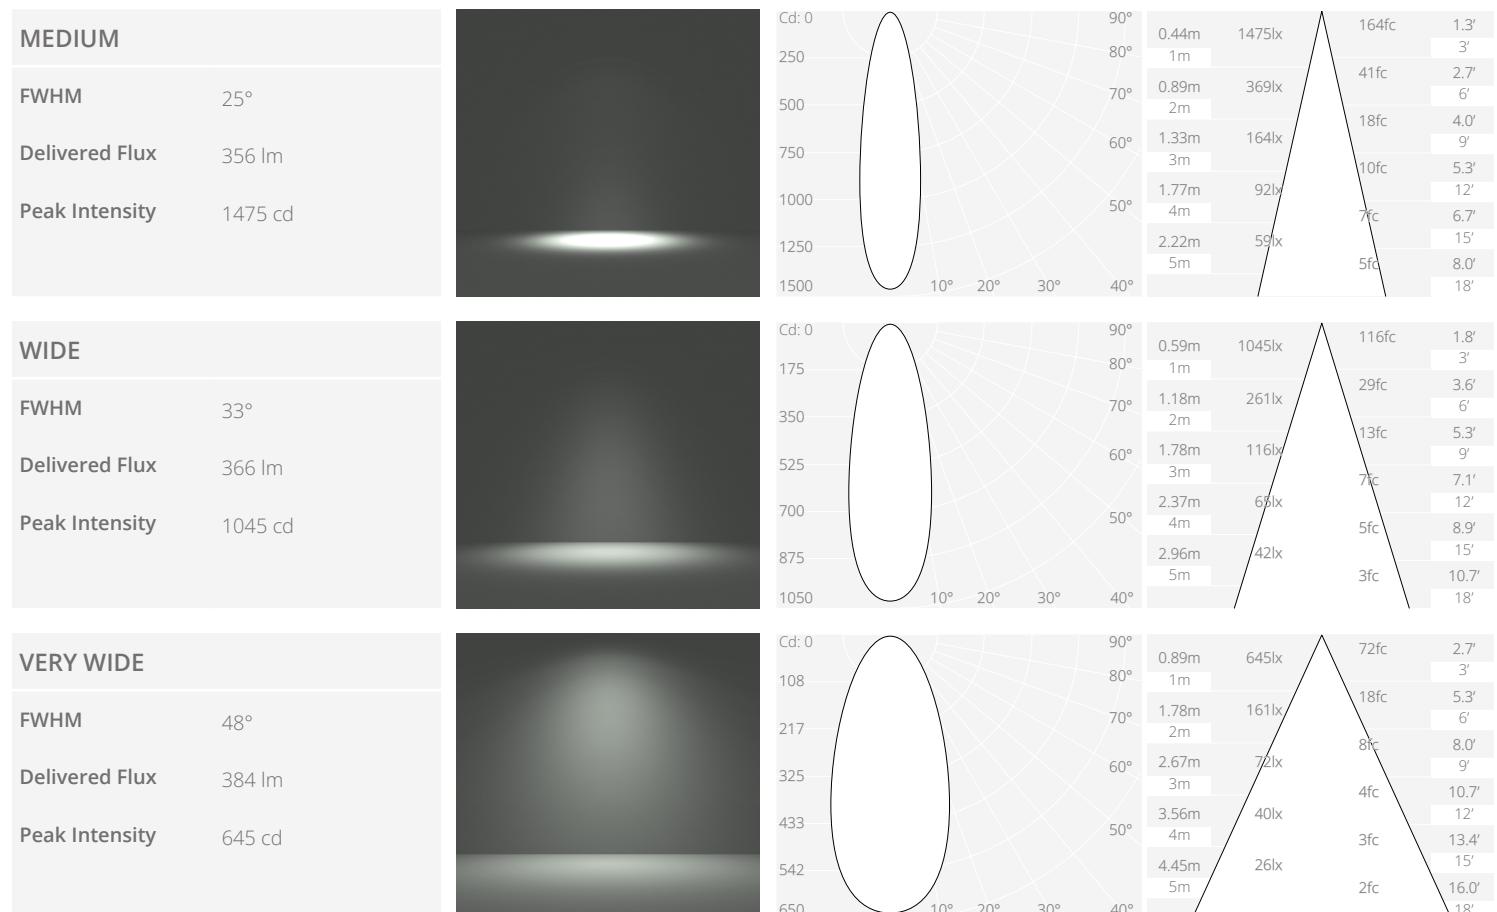

SOLO 8 TUNABLE WHITE 48V DC TRACK

precision
by luminii

OPTICS & ACCESSORIES

TUNABLE WHITE LIGHT ENGINE





OPTICS


There are 3 interchangeable optics, cross reference the molded ID on the optic for beam option.

Optic	Optic	Optic
		
Medium TIR Optic	Wide TIR Optic	Very Wide TIR Optic
Molded ID 18	Molded ID 24	Molded ID 36
Order Code	Order Code	Order Code
HKRG-25-18-PC	HKRG-25-24-PC	HKRG-25-36-PC

ACCESSORIES

This product can hold 2 x accessories within the integrated holder. To accommodate additional accessories please contact our sales team. Accessories are pre-installed unless otherwise requested.

Glare Control	Beam Shaping	Beam Shaping	Colour Change	Colour Change
				
Honeycomb Louver	Softening Lens	Linear Lens	1/4 CTO	Custom Colour Filter
W25xH3.2mm W0.98xH0.13"	W25xH1.5mm W0.98xH0.06"	W25xH1.5mm W0.98xH0.06"	W25xH1.8mm W0.98xH0.07"	W25xH1.8mm W0.98xH0.07"
Order Code	Order Code	Order Code	Order Code	Order Code
995-25-BK	HKFD-25-SMO-1	HKFD-25-LIN-1	997-1/4CTO-25	Contact Sales Rep

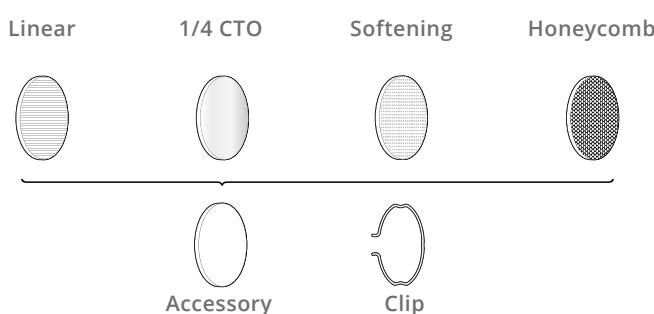

Included with luminaire