

Solo 8 Tunable White Surface

PRODUCT OVERVIEW

TUNABLE WHITE LIGHT ENGINE



KEY FEATURES

- Beam Options: 25 | 33 | 48
- Light Engine Performance: 384lm | 6.58W
- Movement: 360 Pan | 90 Tilt
- Tool-less field changeable optics
- Interchangeable accessories
- 2 Channel tunable CCT
- UK Part L1 / L2 (Display) Compliant
- Title 24 JA8 Certified



OVERVIEW

Solo 8 Tunable White Surface is a Constant Current LED spotlight with the option of 2 CCT tuning ranges (1800-3000K / 2700-5000K) and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has three site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. Our 384lm | 6.58W light engine has a max peak intensity of 1475cd. This product requires an external dual channel constant current LED driver.

PERFORMANCE

	Tunable White		
	Medium	Wide	V. Wide
FWHM	25°	33°	48°
Luminous Flux	356 lm	366 lm	384 lm
Peak Intensity	1475 cd	1045 cd	645 cd
CCT	1800-3000K 2700-5000K		
CRI Min.	92 92		
LED Current	0.188 A		
Voltage	35 V		
Input Wattage	6.58 W		
Efficacy	58.4 lm/W		
Driver Type	Constant Current Remote		
Class	SELV Class III		

ORDER CODE

Model	Type	Output	CCT	Beam Angle	Finish
SOL08 Solo 08	SP Surface Plate	TWSO Tunable White	18K30K 1800K-3000K	ME Medium 25°	WH White
			27K50K 2700K-5000K	WD Wide 33°	BK Black
				VW Very Wide 48°	AL Br. Aluminium
					RBZ Rubbed Bronze
					BR Br. Brass
					PB Polished Brass

Example code: SOL08-SP-TWSO-18K30K-ME-WH

See Drivers, Power Supplies and Accessories sections for further order codes

SOLO 8 TUNABLE WHITE SURFACE

LIGHT ENGINE SELECTION

This product specification sheet references our 2 channel Tunable White light engine, for Warm Dim please refer to its separate specification sheet.

tunable/**WHITE**

Allows users to adjust the correlated colour temperature (CCT) of their light on demand, with options for analogue, digital, or wireless control. Tuning ranges are available to suit a range of applications.

- 1800K - 3000K
- 2700K - 5000K

LIFETIME & ENVIRONMENTAL

At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

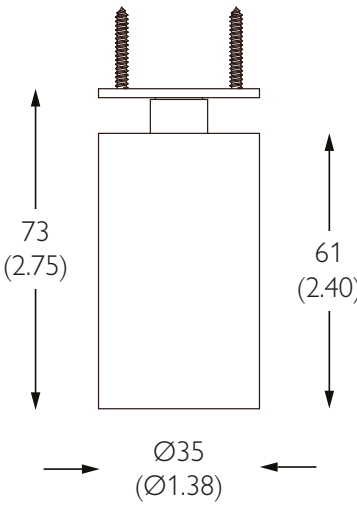
CIBSE TM65	8.18 Kg/CO2e	UK PART L	
CIBSE TM66	2.4	Part L1A / L1B (Dwellings)	Compliant 110 lm/W Source lm (724 lm) / Source W (6.58 W)
RoHS Compliance	Yes	Part L2A (General)	-
REACH Compliance	Yes	Part L2A (Display)	Compliant 110 lm/W Source lm (724 lm) / Source W (6.58 W)
WEEE Compliance	Yes - Registered Producer		
Declare	Declared		
Lifetime	L90B10 50,000hrs		
Warranty	5 Years		

SOLO 8 TUNABLE WHITE SURFACE

DIMENSIONS & FINISHES

TUNABLE WHITE LIGHT ENGINE

DIMENSIONS



MECHANICAL

Location	IP20 Indoor Dry Location Only	Cutout	N/A
Mounting	Surface mounting plate	Ceiling Thickness	N/A
Adjustability	360 Pan 90 Tilt	Product Class	SELV Class III
Lockable	Pan	Material	Machined AL 6063-T6 Machined Brass
Accessories	Louver Lenses	Weight	82g 0.18lb

FINISHES



SOLO 8 TUNABLE WHITE SURFACE

DRIVERS & POWER SUPPLIES – UK, EU, MIDDLE EAST, ASIA, PACIFIC

TUNABLE WHITE LIGHT ENGINE

20W | DALI-2 DT6 | Remote | Constant Current

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2 DT6
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	1800-3000K	2700-5000K		L	W	H
Max. Lights	1 only	1 only	mm	184	41	30
Order Code	PSCC-RM-1110T01-01D	PSCC-RM-1110T02-01D	in	7.24	1.61	1.18

20W | DALI-2 DT8 | Remote | Constant Current

Input Voltage	230VAC 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2 DT8
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	1800-3000K	2700-5000K		L	W	H
Max. Lights	1 only	1 only	mm	184	41	30
Order Code	PSCC-RM-1110T01-01E	PSCC-RM-1110T02-01E	in	7.24	1.61	1.18


SOLO 8 TUNABLE WHITE SURFACE

DRIVERS & POWER SUPPLIES – NORTH AMERICA

TUNABLE WHITE LIGHT ENGINE

50W | 0-10V 2CH | Remote | Constant Current

Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	0-10V 2CH
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')

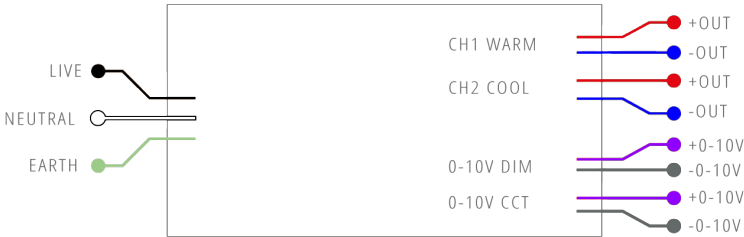

	1800-3000K	2700-5000K		L	W	H
Max. Lights	1 only	1 only	mm	318	130	61
Order Code	USCC-RM-1110T01-01A	USCC-RM-1110T02-01A	in	12.52	5.12	2.4

30W | DALI-2 DT6 | Remote | Constant Current

Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2 DT6
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	1800-3000K	2700-5000K		L	W	H
Max. Lights	1 only	1 only	mm	318	130	61
Order Code	USCC-RM-1110T01-01D	USCC-RM-1110T02-01D	in	12.52	5.12	2.4

30W | DALI-2 DT8 | Remote | Constant Current

Input Voltage	120-277V 50/60 Hz
Driver Type	Remote Constant Current
Location	IP20 Indoor Location Only
Dimming Control	DALI-2 DT8
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible No Observable Effect
Wiring Distance	16 AWG - 36m (118') 18 AWG 22m (72')



	1800-3000K	2700-5000K		L	W	H
Max. Lights	1 only	1 only	mm	318	130	61
Order Code	USCC-RM-1110T01-01E	USCC-RM-1110T02-01E	in	12.52	5.12	2.4

SOLO 8 TUNABLE WHITE SURFACE

PHOTOMETRY

TUNABLE WHITE LIGHT ENGINE

OUTPUT SCALING

CCT	Output Multiplier	CRI	R9 Typ.	TM-30: Rf	TM-30: Rg	Max Lm
1800K	0.57	92	68	90	99	219
2400K	0.77	92	80	90	99	296
3000K	1.00	92	75	90	99	384
4000K	1.05	91	70	89	101	403
5000K	1.06	91	65	89	99	407

Colour Consistency: 3 SDCM at 3000K

PHOTOMETRY

MEDIUM				<table><tr><td>Cd: 0</td><td>90°</td><td>0.44m</td><td>1475lx</td><td>164fc</td><td>1.3'</td></tr><tr><td>250</td><td>80°</td><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>500</td><td>70°</td><td>0.89m</td><td>369lx</td><td>41fc</td><td>2.7'</td></tr><tr><td>750</td><td>60°</td><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>1000</td><td>50°</td><td>1.33m</td><td>164lx</td><td>18fc</td><td>4.0'</td></tr><tr><td>1250</td><td>40°</td><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>1500</td><td></td><td>1.77m</td><td>92lx</td><td>10fc</td><td>5.3'</td></tr><tr><td></td><td></td><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td></td><td></td><td>2.22m</td><td>59lx</td><td>7fc</td><td>6.7'</td></tr><tr><td></td><td></td><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td></td><td></td><td>5fc</td><td>8.0'</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>18'</td></tr></table>	Cd: 0	90°	0.44m	1475lx	164fc	1.3'	250	80°	1m			3'	500	70°	0.89m	369lx	41fc	2.7'	750	60°	2m			6'	1000	50°	1.33m	164lx	18fc	4.0'	1250	40°	3m			9'	1500		1.77m	92lx	10fc	5.3'			4m			12'			2.22m	59lx	7fc	6.7'			5m			15'					5fc	8.0'						18'
Cd: 0	90°				0.44m	1475lx	164fc	1.3'																																																																				
250	80°				1m			3'																																																																				
500	70°				0.89m	369lx	41fc	2.7'																																																																				
750	60°				2m			6'																																																																				
1000	50°	1.33m	164lx	18fc	4.0'																																																																							
1250	40°	3m			9'																																																																							
1500		1.77m	92lx	10fc	5.3'																																																																							
		4m			12'																																																																							
		2.22m	59lx	7fc	6.7'																																																																							
		5m			15'																																																																							
				5fc	8.0'																																																																							
					18'																																																																							
FWHM	25°																																																																											
Delivered Flux	356 lm																																																																											
Peak Intensity	1475 cd																																																																											
WIDE				<table><tr><td>Cd: 0</td><td>90°</td><td>0.59m</td><td>1045lx</td><td>116fc</td><td>1.8'</td></tr><tr><td>175</td><td>80°</td><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>350</td><td>70°</td><td>1.18m</td><td>261lx</td><td>29fc</td><td>3.6'</td></tr><tr><td>525</td><td>60°</td><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>700</td><td>50°</td><td>1.78m</td><td>116lx</td><td>13fc</td><td>5.3'</td></tr><tr><td>875</td><td>40°</td><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>1050</td><td></td><td>2.37m</td><td>63lx</td><td>7fc</td><td>7.1'</td></tr><tr><td></td><td></td><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td></td><td></td><td>2.96m</td><td>42lx</td><td>5fc</td><td>8.9'</td></tr><tr><td></td><td></td><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td></td><td></td><td>3fc</td><td>10.7'</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>18'</td></tr></table>	Cd: 0	90°	0.59m	1045lx	116fc	1.8'	175	80°	1m			3'	350	70°	1.18m	261lx	29fc	3.6'	525	60°	2m			6'	700	50°	1.78m	116lx	13fc	5.3'	875	40°	3m			9'	1050		2.37m	63lx	7fc	7.1'			4m			12'			2.96m	42lx	5fc	8.9'			5m			15'					3fc	10.7'						18'
Cd: 0	90°				0.59m	1045lx	116fc	1.8'																																																																				
175	80°				1m			3'																																																																				
350	70°				1.18m	261lx	29fc	3.6'																																																																				
525	60°				2m			6'																																																																				
700	50°	1.78m	116lx	13fc	5.3'																																																																							
875	40°	3m			9'																																																																							
1050		2.37m	63lx	7fc	7.1'																																																																							
		4m			12'																																																																							
		2.96m	42lx	5fc	8.9'																																																																							
		5m			15'																																																																							
				3fc	10.7'																																																																							
					18'																																																																							
FWHM	33°																																																																											
Delivered Flux	366 lm																																																																											
Peak Intensity	1045 cd																																																																											
VERY WIDE				<table><tr><td>Cd: 0</td><td>90°</td><td>0.89m</td><td>645lx</td><td>72fc</td><td>2.7'</td></tr><tr><td>108</td><td>80°</td><td>1m</td><td></td><td></td><td>3'</td></tr><tr><td>217</td><td>70°</td><td>1.78m</td><td>161lx</td><td>18fc</td><td>5.3'</td></tr><tr><td>325</td><td>60°</td><td>2m</td><td></td><td></td><td>6'</td></tr><tr><td>433</td><td>50°</td><td>2.67m</td><td>72lx</td><td>8fc</td><td>8.0'</td></tr><tr><td>542</td><td>40°</td><td>3m</td><td></td><td></td><td>9'</td></tr><tr><td>650</td><td></td><td>3.56m</td><td>40lx</td><td>4fc</td><td>10.7'</td></tr><tr><td></td><td></td><td>4m</td><td></td><td></td><td>12'</td></tr><tr><td></td><td></td><td>4.45m</td><td>26lx</td><td>3fc</td><td>13.4'</td></tr><tr><td></td><td></td><td>5m</td><td></td><td></td><td>15'</td></tr><tr><td></td><td></td><td></td><td></td><td>2fc</td><td>16.0'</td></tr><tr><td></td><td></td><td></td><td></td><td></td><td>18'</td></tr></table>	Cd: 0	90°	0.89m	645lx	72fc	2.7'	108	80°	1m			3'	217	70°	1.78m	161lx	18fc	5.3'	325	60°	2m			6'	433	50°	2.67m	72lx	8fc	8.0'	542	40°	3m			9'	650		3.56m	40lx	4fc	10.7'			4m			12'			4.45m	26lx	3fc	13.4'			5m			15'					2fc	16.0'						18'
Cd: 0	90°				0.89m	645lx	72fc	2.7'																																																																				
108	80°				1m			3'																																																																				
217	70°				1.78m	161lx	18fc	5.3'																																																																				
325	60°				2m			6'																																																																				
433	50°	2.67m	72lx	8fc	8.0'																																																																							
542	40°	3m			9'																																																																							
650		3.56m	40lx	4fc	10.7'																																																																							
		4m			12'																																																																							
		4.45m	26lx	3fc	13.4'																																																																							
		5m			15'																																																																							
				2fc	16.0'																																																																							
					18'																																																																							
FWHM	48°																																																																											
Delivered Flux	384 lm																																																																											
Peak Intensity	645 cd																																																																											

SOLO 8 TUNABLE WHITE SURFACE





OPTICS

There are 3 interchangeable optics, cross reference the molded ID on the optic for beam option.

Optic	Optic	Optic
		
Medium TIR Optic Molded ID 18	Wide TIR Optic Molded ID 24	Very Wide TIR Optic Molded ID 36
Order Code HKRG-25-18-PC	Order Code HKRG-25-24-PC	Order Code HKRG-25-36-PC

ACCESSORIES

This product can hold 2 x accessories within the integrated holder. To accommodate additional accessories please contact our sales team. Accessories are pre-installed unless otherwise requested.

Glare Control	Beam Shaping	Beam Shaping	Colour Change	Colour Change
				
Honeycomb Louver W25xH3.2mm W0.98xH0.13"	Softening Lens W25xH1.5mm W0.98xH0.06"	Linear Lens W25xH1.5mm W0.98xH0.06"	1/4 CTO W25xH1.8mm W0.98xH0.07"	Custom Colour Filter W25xH1.8mm W0.98xH0.07"
Order Code 995-25-BK	Order Code HKFD-25-SMO-1	Order Code HKFD-25-LIN-1	Order Code 997-1/4CTO-25	Order Code Contact Sales Rep

