SOLO 8 WARM DIM SURFACE

PRODUCT OVERVIEW

WARM DIM LIGHT ENGINE



KEY FEATURES

Beam Options: 27 | 34 | 47
Light Engine Performance: 302lm | 4.96W
Movement: 360 Pan | 90 Tilt
Tool-less field changeable optics
Interchangeable accessories
1 Channel warm dim
UK Part L1 / L2 (Display) Compliant
Title 24 JA8 Certified

OVERVIEW

Solo 8 Warm Dim Surface is a Constant Current LED spotlight with dim-to-warm ranges of 3000K to 1800K and 2700K to 1800K and comes as standard in white, black and brushed aluminium along with three premium brass finishes. It has three site-changeable optics for flexible beam distribution and 360° lockable pan and 90° constant torque tilt. Our 302lm | 4.96W light engine has a max peak intensity of 1121cd. This product requires a single channel current dimmable LED driver.

PERFORMANCE

	Warm Dim		
	Medium	Wide	V. Wide
FWHM	27°	34°	47°
Luminous Flux	278 lm	283 lm	302 lm
Peak Intensity	1121 cd	796 cd	501 cd
CCT	1800-2700K | 1800-3000K		
CRI Min.	94 | 94		
LED Current	0.300 A		
Voltage	16.54 V		
Input Wattage	4.96 W		
Efficacy	60.9 lm/W		
Driver Type	Constant Current | Remote		
Class	SELV | Class III		

ORDER CODE

Model	Type	Output	CCT	Beam Angle	Finish
SOL08 *Solo 08*	**SP** *Surface Plate*	**WDSO** *Warm Dim*	**18K27K** *1800K-2700K*	**ME** *Medium 27°*	**WH** *White*
			18K30K *1800K-3000K*	**WD** *Wide 34°*	**BK** *Black*
				VW *Very Wide 47°*	**AL** *Br. Aluminium*
					RBZ *Rubbed Bronze*
					BR *Br. Brass*
					PB *Polished Brass*

Example code: SOL08-SP-WDSO-18K27K-ME-WH

See Drivers, Power Supplies and Accessories sections for further order codes

RCLPLLSALES@LUMINII.COM
LUMINII.COM | PRECISIONLIGHTING.CO.UK

SOLO 8 WARM DIM SURFACE

LIGHT ENGINE SELECTION

This product specification sheet references our Warm Dim light engine, for Tunable White please refer to its separate specification sheet.

warm DIM

Utilises fixture-integrated electronics that warms the colour temperature of the light as it dims; combining the beauty of Halgoen with the efficacy of LEDs.

- Halogen like CCT dimming curve
- Dims to 1800K

LIFETIME & ENVIRONMENTAL

At Precision, we design and engineer our products with longevity in mind. Many of the components that make up our light fixtures are both modular and re-usable, making it possible to service and repair them throughout their life in service. Once our products reach the end of their useful life, it is possible to re-work and renew them in to a new product. We prioritise the use of recyclable materials in both our products and packaging, and encourage our customers to engage responsibly in the correct disposal of any materials we supply.

CIBSE TM65	8.18 Kg/CO2e
CIBSE TM66	2.4
RoHS Compliance	Yes
REACH Compliance	Yes
WEEE Compliance	Yes - Registered Producer
Declare	Declared
Lifetime	L90B10 50,000hrs
Warranty	5 Years

UK PART L	
Part L1A / L1B (Dwellings) *≥75 lm/W source lumens*	*Compliant 117 lm/W* *Source lm (580 lm) / Source W (4.96 W)*
Part L2A (General) *≥95lm/W delivered lumens*	-
Part L2A (Display) *≥80 lm/W source lumens*	*Compliant 117 lm/W* *Source lm (580 lm) / Source W (4.96 W)*


RCLPLLSALES@LUMINII.COM
LUMINII.COM | PRECISIONLIGHTING.CO.UK

SOLO 8 WARM DIM SURFACE

DIMENSIONS & FINISHES

WARM DIM LIGHT ENGINE


DIMENSIONS

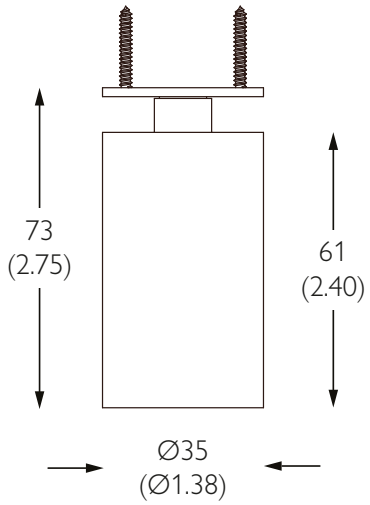

MECHANICAL

Location	IP20 | Indoor Dry Location Only	**Cutout**	N/A
Mounting	Surface mounting plate	**Ceiling Thickness**	N/A
Adjustability	360 Pan | 90 Tilt	**Product Class**	SELV | Class III
Lockable	Pan	**Material**	Machined AL 6063-T6 | Machined Brass
Accessories	Louver | Lenses	**Weight**	82g | 0.18lb

FINISHES

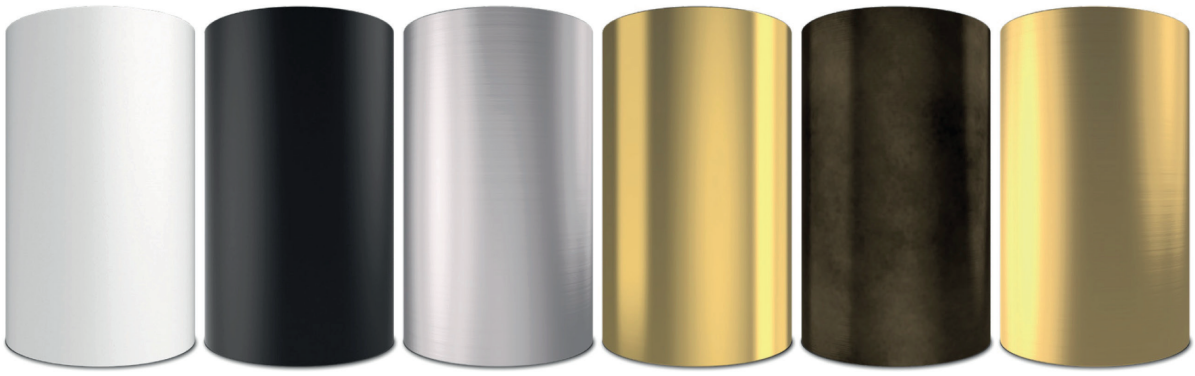

White | Black | Brushed Aluminium | Polished Brass | Rubbed Bronze | Brushed Brass

RCLPLLSALES@LUMINII.COM
LUMINII.COM | PRECISIONLIGHTING.CO.UK

SOLO 8 WARM DIM SURFACE

DRIVERS & POWER SUPPLIES – UK, EU, MIDDLE EAST, ASIA, PACIFIC

WARM DIM LIGHT ENGINE

20W | 0-10V | Remote | Constant Current

Input Voltage	230VAC | 50/60 Hz
Driver Type	Remote | Constant Current
Location	IP20 | Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible | No Observable Effect
Wiring Distance	16 AWG - 36m (118') | 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 only	**mm**	160	41	30
Order Code	PSCC-RM-1110W01-01A	**in**	6.3	1.61	1.18

20W | DALI-2 | Remote | Constant Current

Input Voltage	230VAC | 50/60 Hz
Driver Type	Remote | Constant Current
Location	IP20 | Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible | No Observable Effect
Wiring Distance	16 AWG - 36m (118') | 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 only	**mm**	160	41	30
Order Code	PSCC-RM-1110W01-01D	**in**	6.3	1.61	1.18

RCLPLLSALES@LUMINII.COM
LUMINII.COM | PRECISIONLIGHTING.CO.UK

SOLO 8 WARM DIM SURFACE

30W | 0-10V | Remote | Constant Current

Input Voltage	120-277V | 50/60 Hz
Driver Type	Remote | Constant Current
Location	IP20 | Indoor Location Only
Dimming Control	0-10V
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible | No Observable Effect
Wiring Distance	16 AWG - 36m (118') | 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 only	**mm**	348	65	47
Order Code	USCC-RM-1110W01-01A	**in**	13.7	2.56	1.85

30W | DALI-2 | Remote | Constant Current

Input Voltage	120-277V | 50/60 Hz
Driver Type	Remote | Constant Current
Location	IP20 | Indoor Location Only
Dimming Control	DALI-2
Min. Dim Level	0.1%
Flicker	IEEE P1789 Compatible | No Observable Effect
Wiring Distance	16 AWG - 36m (118') | 18 AWG 22m (72')



	All CCT's		L	W	H
Max. Lights	1 only	**mm**	348	65	47
Order Code	USCC-RM-1110W01-01D	**in**	13.7	2.56	1.85

SOLO 8 WARM DIM SURFACE

PHOTOMETRY

WARM DIM LIGHT ENGINE

OUTPUT SCALING


CCT	Output Multiplier	CRI	R9 Typ.	TM-30: Rf	TM-30: Rg	Max Lm
1800K	0.10	95	69	90	104	30
2100K	0.70	96	82	89	108	211
2400K	0.80	96	85	91	106	242
2700K	0.90	94	85	90	101	272
3000K	1.00	94	85	90	101	302


Colour Consistency: 3 SDCM at max CCT

PHOTOMETRY

MEDIUM

FWHM	27°
Delivered Flux	278 lm
Peak Intensity	1121 cd




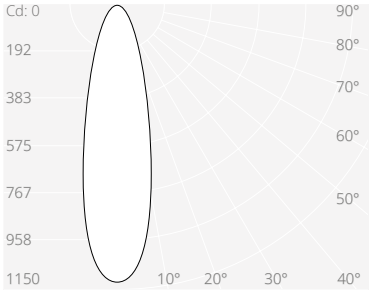





WIDE

FWHM	34°
Delivered Flux	283 lm
Peak Intensity	796 cd




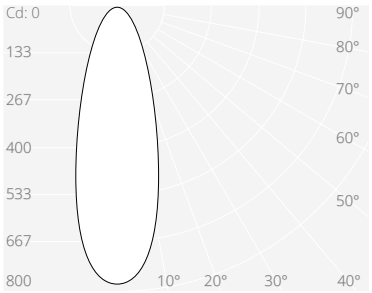


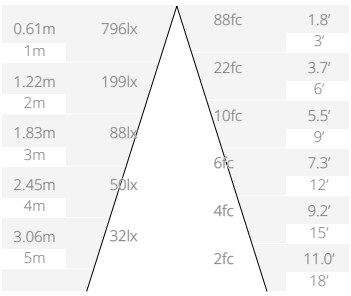


VERY WIDE

FWHM	47°
Delivered Flux	302 lm
Peak Intensity	501 cd



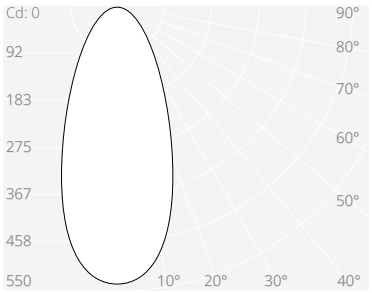

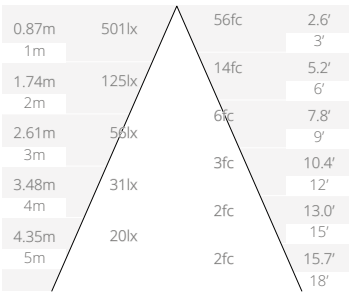

RCLPLLSALES@LUMINII.COM
LUMINII.COM | PRECISIONLIGHTING.CO.UK





OPTICS


There are 3 interchangeable optics, cross reference the molded ID on the optic for beam option.

Optic	Optic	Optic
		
Medium TIR Optic	**Wide TIR Optic**	**Very Wide TIR Optic**
Molded ID 18	Molded ID 24	Molded ID 36
Order Code	**Order Code**	**Order Code**
HKRG-25-18-PC	**HKRG-25-24-PC**	**HKRG-25-36-PC**

ACCESSORIES

This product can hold 2 x accessories within the integrated holder. To accommodate additional accessories please contact our sales team. Accessories are pre-installed unless otherwise requested.

Glare Control	Beam Shaping	Beam Shaping	Colour Change	Colour Change
				
Honeycomb Louver	**Softening Lens**	**Linear Lens**	**1/4 CTO**	**Custom Colour Filter**
W25xH3.2mm | W0.98xH0.13"	W25xH1.5mm | W0.98xH0.06"	W25xH1.5mm | W0.98xH0.06"	W25xH1.8mm | W0.98xH0.07"	W25xH1.8mm | W0.98xH0.07"
Order Code	**Order Code**	**Order Code**	**Order Code**	**Order Code**
995-25-BK	**HKFD-25-SMO-1**	**HKFD-25-LIN-1**	**997-1/4CTO-25**	**Contact Sales Rep**

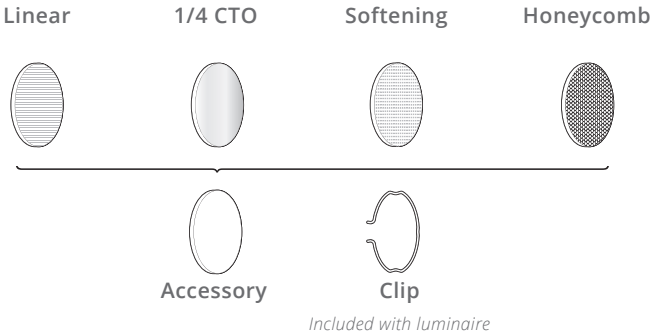

Included with luminaire