

OUTDOOR IP68 & IK10 RATED

# TRIDENT Outdoor

RECESSED LINEAR PROFILE

senso  
by luminii



**Trident Outdoor - Recessed IP68 & IK10 Rated Linear Profile.** The Trident Outdoor Recessed is designed for applications requiring sturdy and secure in-ground and IP68 & IK10 rated lighting. Our LED encapsulation process ensures a long lasting, vandal resistant seal with hard resin and our specialty machined end caps, straight and corner adapters. Many options are available making it highly modular, versatile and easy to install.

## Ordering Code

Fixture	455	407						
	1	2	3	4	5	6	7	8

## Product Specifications

SAMPLE : Fixture 455 - 407 - FH - LO - 25 - 02 - E36 - 6'

1 - Type	2 - Model	3 - Resin	4 - LED Style <sup>*1</sup>					
<b>455</b> • IP68 & IK10 Rated Profile	<b>407</b> • Trident Recessed Outdoor	<b>FH</b> • Frosted Hard <b>CH</b> • Clear Hard	Static White	Dynamic Color <sup>*2</sup>	<b>DWSO</b> • LLDW68SO Dynamic White Standard Output <b>DWHO</b> • LLDW68HO Dynamic White High Output <b>RGBSO</b> • LLRGB42SO Color changing Standard Output <b>RGBHO</b> • LLRGB42HO Color changing High Output <b>RGBWSO</b> • LLRGBW36-SO Color changing Standard Output <b>RGBWHO</b> • LLRGBW36-HO Color changing High Output			
<b>5 - CCT</b>			<b>6 - Finish</b>		<b>7 - Feed Length</b>		<b>8 - Fixture Length<sup>*1</sup></b>	
Static White	Dynamic Color <sup>*2</sup>	<b>02</b> • Black <sup>*3</sup> <b>08</b> • Silver	<b>B36</b> • 36" Back Fed <b>E36</b> • 36" End Fed <b>BXX</b> • Custom Back Fed <b>EXX</b> • Custom End Fed	<b>XX</b> • Custom (XX.XX') Continuous runs will be made in equal sections no more than 6' long			<b>NOTE:</b> For Channels and Lenses over 90", incremental shipping charges will apply	
<b>25</b> • 2500K	<b>1935</b> • 1900K - 3500K <sup>*4</sup>							
<b>27</b> • 2700K	<b>98</b> • RGB Color changing							
<b>30</b> • 3000K	<b>99</b> • RGB+W Color changing							
<b>35</b> • 3500K								
<b>40</b> • 4000K								

\*1 Refer to page 2 for LED cut length intervals and available CCT

\*2 DMX driver required

\*3 Only Trident extrusion and mounting blocks finished in anodized black

\*4 Please ask about different CCT ranges

Project : \_\_\_\_\_  
Quantity : \_\_\_\_\_  
Type : \_\_\_\_\_  
Notes : \_\_\_\_\_



## LED Technical Information

	STYLE	WATT/FT	DELIVERED LM/FT CLEAR	DELIVERED LM/FT FROSTED	CRI	MAX. LENGTH	Color TEMPERATURE
Static White	LLHE48LO-1W	1.0	80	51	92	60'	2200K, 2500K, 2700K, 3000K, 3500K, 4000K
	LLHE48LO	1.9	160	102	92	48'	
	LLHE48SO	2.8	228	146	92	42'	
	LLHE48MO	3.5	304	195	92	33'	
	LLHE48HO	7.3	488	313	90	21'	
Dynamic Color	LLDW68SO-1935	4.1	251	186	95	32'	1900K - 3500K Red/Green/Blue Red/Green/Blue White LED 97 CRI / 3000K
	LLDW68HO-1935	5.2	273	202	96	32'	
	LLRGB42SO	4.4	149	81	–	28'	
	LLRGB42HO	7.7	231	126	–	28'	
	LLRGBW36SO	4.1	127	94	97	26'	
	LLRGBW36HO	7.6	281	153	97	26'	

\* Lumen output calculations based on 3500K.  
For LED strip information, See the page for:

LLHE48 [HERE](#).  
LLDW68 [HERE](#).  
LLRGB42 [HERE](#).  
LLRGBW36 [HERE](#).

## Resin & Profile Features

### Top Layer

The top resin layer of the Trident acts as the lens and first line of defense for the LED.


### Soft cured resin:

Outdoor resistant against rain, snow and direct sunlight as well as intense conditions like hail and acid rain. The resin is also thermal resistant against thermal cycles and drastic changes in temperature.

Chemicals like detergents or disinfectants will not deteriorate, disintegrate or discolor the soft resin.

### Hard cured resin:

The hard cured resin maintains all of the same outdoor resistant features as the soft, but acquires extra physical resistance as well. Abrasion resistance will keep the resin intact even after wear, impact or high levels of pressure are applied. It will prevent vandalism and resist fire and ignition. The hard resin allows any profile to be floor mounted.

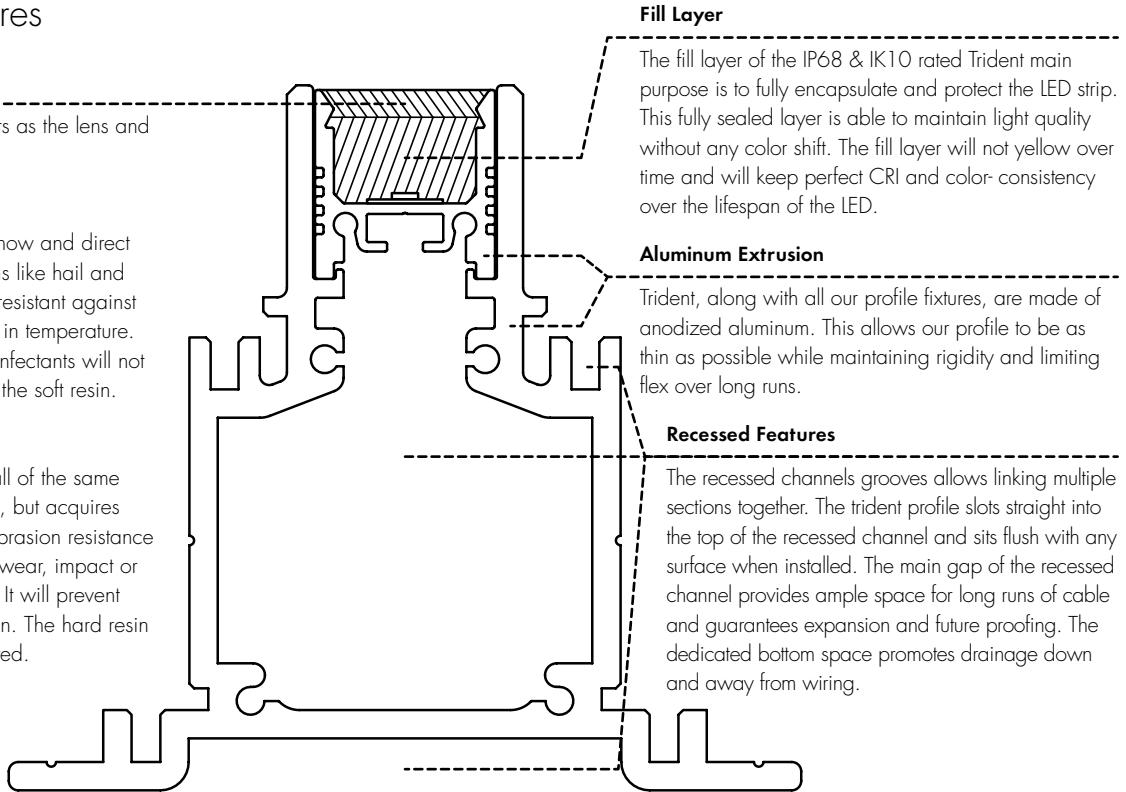

## Top Layer Finish

### Frosted Resin



The frosted resin top layer is available in both hard and soft options. It offers a soft diffused light with no dots.

### Clear Resin



The clear resin top layer is the best option for maximum light efficiency. Low light loss allows you to get the most out of each LED.

## Construction


- High quality poured resin lens
- Hard, clear and frosted resin options
- Aluminum extruded profile and recessed channel

## Installation

- Electrical wire included
- Recessed channel connects to end caps, corner and straight connectors
- Includes plastic spacer for laying ground material



## Dimensions

Recessed Channel with Trident

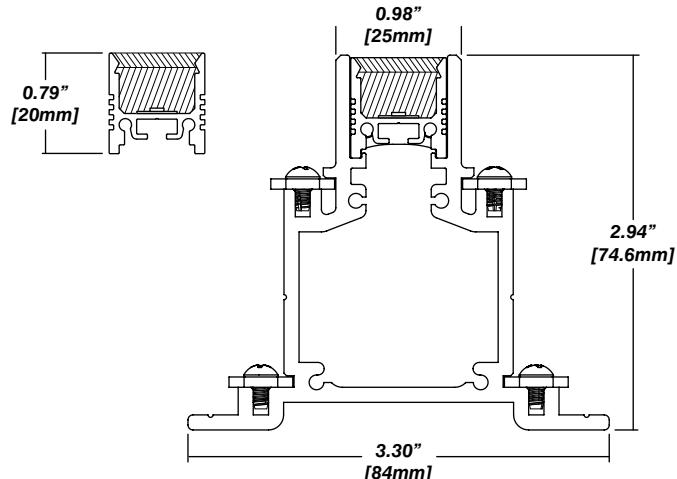


## Recessed Channel

- Solid aluminum extruded construction
- Trident drops straight in to channel
- Allows Trident to be recessed into many different materials

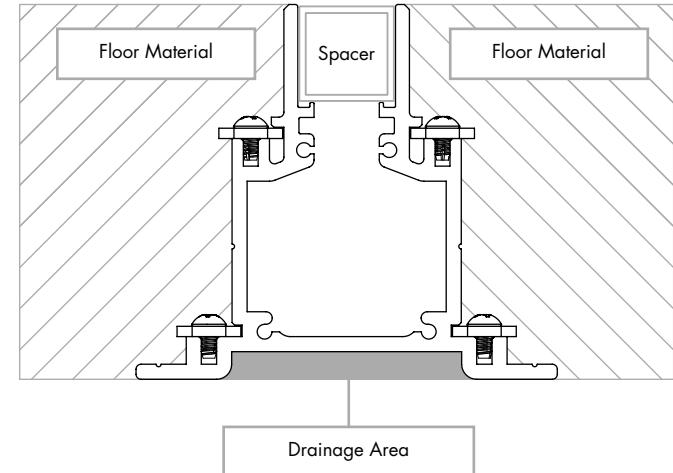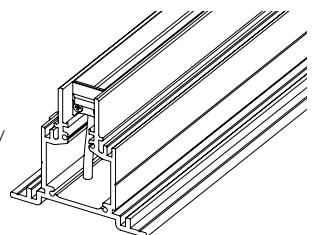

## End Cap



- Holds Trident in place at each end of the channel
- End cap may have hole drilled out to be end fed

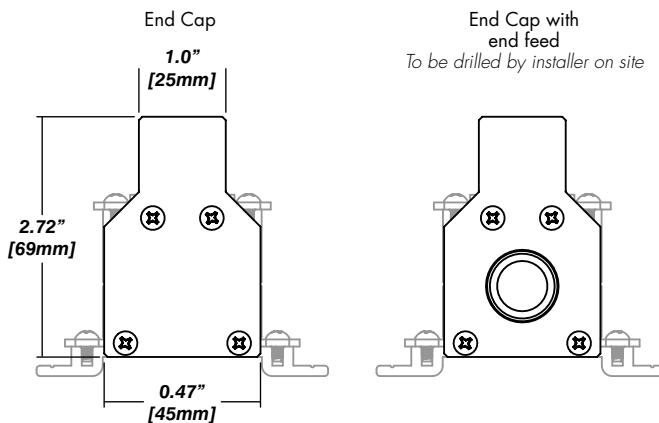



## Channel Brackets and Anchors

- Securely connects 2 channel sections together
- Held in place by 2 screws per channel section
- 4 brackets required per join (2 per side)

### Straight Adapter

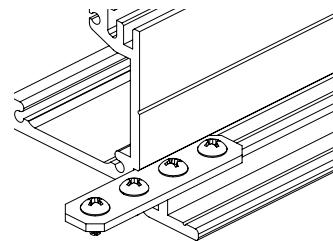



### Corner Adapter

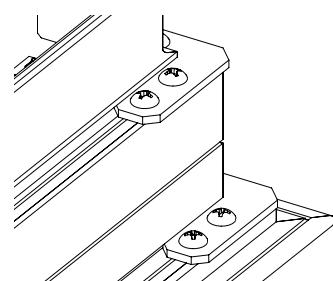

- Anodized aluminum anchors provide quick channel mounting
- Tamper resistant screws help keep Trident secure
- 1 anchor is required at each end of channel as well as 1 anchor every 6' section of Trident.

### Anchors

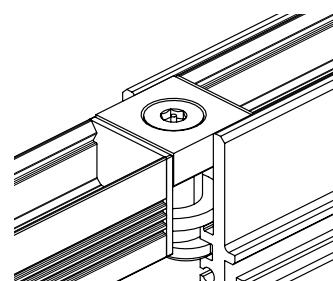

OUTDOOR IP68 & IK10 RATED

# TRIDENT Outdoor

RECESSED LINEAR PROFILE

 senso  
by luminii



## Recessed System

Recessed lighting promotes the best integration of lighting and architecture. Creativity is the only limitation because Trident recessed can flow through a space linking surfaces with minimal dark spots.




## Universal Power Supply 1% 120VAC - 277VAC

## Universal Power Supply 1% 120VAC - 277VAC

MODEL	POWER	OUTPUT
PDCU-D - IP20 Dry Series	30 - 30 W 60 - 60 W 96 - 96 W	24 - 24 VDC
PDCU-W - IP66 Wet Series	96 - 96 W	

0-10V dims down to 1%, MLV/ELV/TRIAC dims down to 1%.

Contact Senso to specify 347V transformer.

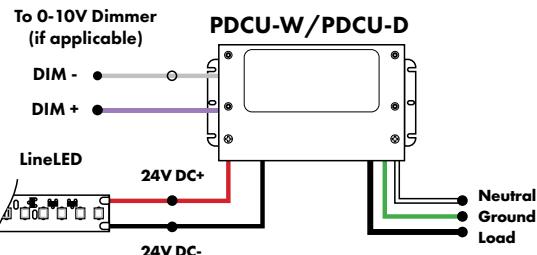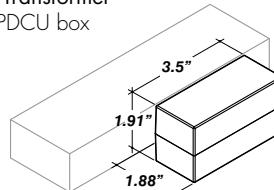
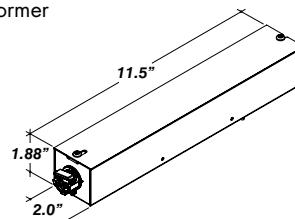
For a complete details on the Universal Power Supply, see Spec Sheet, Compatible Dimming and Install Guide on the [Resources page](#).30W/60W 347V Transformer  
attaches directly to PDCU box96W 347V Transformer  
wired to PDCU box

MODELS	PDCU-W 96W	PDCU-D 30W	PDCU-D 60W	PDCU-D 96W
Length	8.66"	6.10"	7.93"	8.25"
Width	3.73"	3.35"	3.35"	4.10"
Depth	1.61"	1.33	1.32"	1.56"

## DMX Dimming Power Supply 120VAC - 277VAC

## DMX Dimming Power Supplies 120VAC - 277VAC

MODEL	POWER	OUTPUT
PSDMX - DMX Power Supply dims down to 0%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC

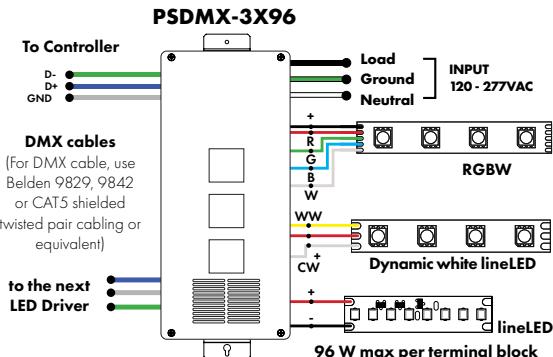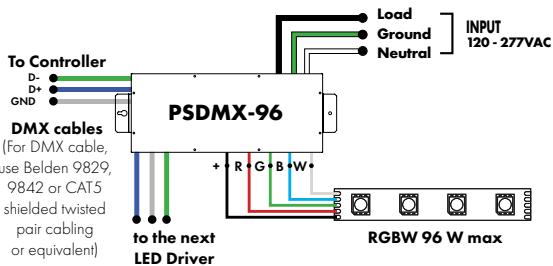Features eldolED's LINEARdrive configurable dimmable drivers. For a complete details on the DMX Dimming Power Supply, see Spec Sheet on the [Resources page](#).



## DALI 0% Dimming Power Supplies 120VAC - 277VAC

DALI 0% Dimming Power Supplies 120VAC - 277VAC

MODEL	POWER	OUTPUT
PSDALI - DALI Power Supply dims down to 0%	96 - 96 Watt 3X96 - 3 X 96 Watt	24 - 24 VDC

Features eldoLED's LINEARdrive configurable dimmable drivers

Model	96W	3X96
Length	14.40"	15.75"
Width	5.20"	6.62"
Depth	2.60"	4.95"

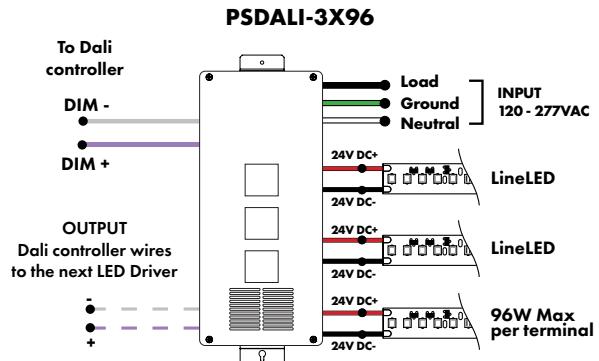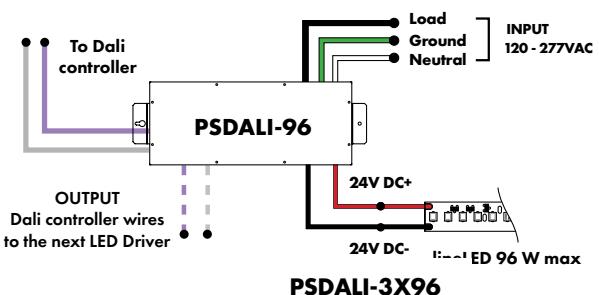

# TRIDENT Outdoor

RECESSED LINEAR PROFILE



Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 1%

MODEL

LTEA4U1UKL-CV240

Lutron - HiLume™ 1% 2-wire LED Driver  
40W max

(120V forward phase only)

MODEL


L3DA4U1UKL-CV240

HiLume™ 1% EcoSystem Voltage LED driver  
40W max


MODELS	LTEA41UKLCV240	L3DA4U1UKLCV240
Length	4.89"	4.98"
Width	4.00"	4.00"
Depth	2.62"	2.62"

For a complete details on the Lutron Power Supply, see Spec Sheet and Install Guide on the [Resources page](#).

LTEA4U1UKL-CV240

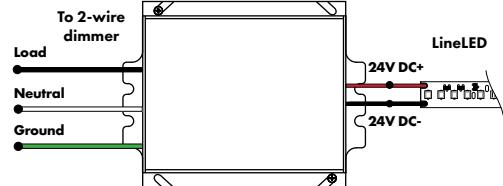

LTEA4U1UKL-CV240

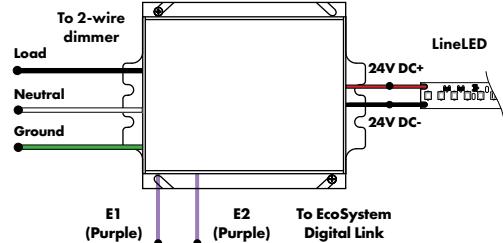

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

HiLume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™  
96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

