



Features

- Full length seamless lenses range from 2 to 12 feet.
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable.
- Features a symmetrical, high-performance frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty.

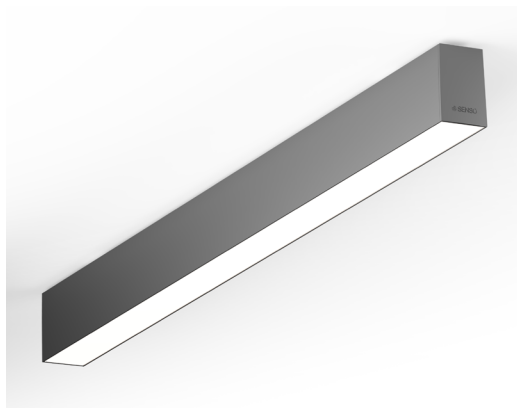

Finish Options

☐ White ☒ Black ☐ Silver

RoHS



Made in Canada
with Imported Parts

Technical Information

OUTPUT OPTIONS	TW04	TW06	TW08
Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
Efficacy	20 lm/W	21 lm/W	21 lm/W

CCT	CRI	TM-30		
		R _f	R _g	R ₉
2700K	91	90	96	59
6500K	93	87	97	73

Ordering Code

Integral Driver Example: Fixture VSD-SM-4FT-04-27K-F-CH-WH-0103-NA

Fixture

MODEL	LENGTH	OUTPUT	CCT	LENS	MOUNTING	BODY FINISH
VSD-SM - Vesta Dry, Surface Mount	4ft - 4 feet 6ft - 6 feet 8ft - 8 feet 10ft - 10 feet 12ft - 12 feet XX - System ⁷	TW04 - 418 lm/ft (4.8 W/ft) ² TW06 - 592 lm/ft (7.2 W/ft) TW08 - 776 lm/ft (9.6 W/ft)	27K65K - Tunable White, 2700K-6500K ¹	F - Frosted Lens	SM - Surface Mount	Standard WH - White BK - Black SL - Silver
DRIVER		DRIVER OPTIONS ⁶				

010S - 0-10V, 1% Dimming, 120/277V³
DALI - EddLED, DALI protocol 2, DT-6, Log, 0.1% Dimming, 120/277V
(Standard as LOG)⁸
DMX - EddLED, DMX, 0.1% Dimming, 120V/277V

NA - None
CSMB - Casambi⁴
MNOD - PIR Motion Sensor, Occupancy,
Daylight Harvesting⁵


1 - Tunable White output numbers are at representative of 4000K.
2 - Tunable White at 4ft length, not available with Output TW04.
3 - 010S driver is only available with driver option CSMB.
4 - CSMB with 010S/DALI drivers only.

5 - MNOD contact manufacturer for build assistance - (MOD Only).
6 - AVNR contact manufacturer for build assistance - (MOD Only).
7 - Customizable configurations available, contact factory (MOD only).
8 - DALI driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALILIN


CONTACT FACTORY FOR MORE OPTIONS.

Lens

F
Frosted Lens



AS
Asymmetric Lens



BL
Black Lens




Cut Lengths

CODE	FIXTURE LENGTH LONGUEUR	*1	Feet	2	4	6	8	10	12
A	22.5"								
B (4)	44.5"								
C (6)	66.5"								
D (8)	88.5"								
E (10)	110.5"								
F (12)	132.5"								

Legend

▲ : Suspension Point
F() : Feed Point
D : Direct
DI : Direct / Indirect
SS : Separate Switching



L node dimensions/



*1 Not including end-caps. End-caps are an additional 5/32"

For custom lengths please call customer service. Cover plates will be added to each end to avoid dark spaces on lense.

Sensor adds 3.75" to standard vesta length


VESTA

DRY SURFACE MOUNT
TUNABLE WHITE



Standard Finish


BK
Black



WH
White




SL
Silver




TM-30

Tunable White 2700K





Tunable White 6500K





Photometry

Tunable White Down


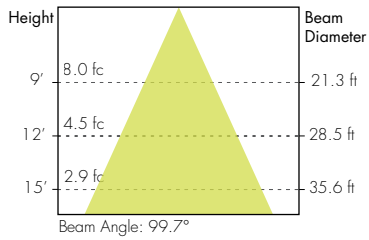


Photometry



10° Faceted Reflector

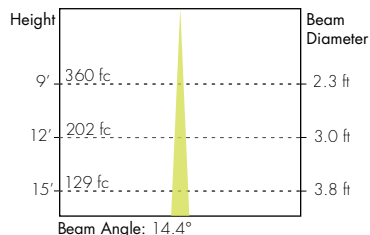



30° Smooth Reflector

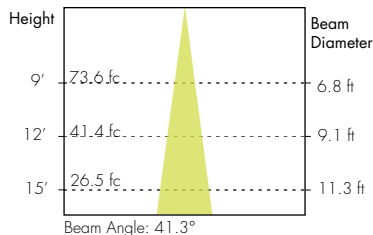



18° Faceted Reflector

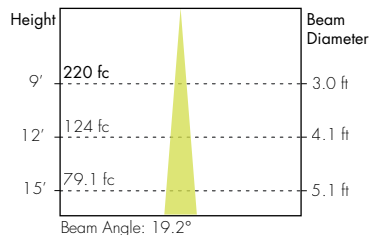



45° Smooth Reflector

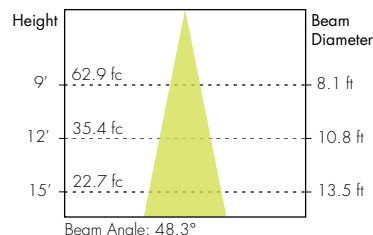



30° Faceted Reflector

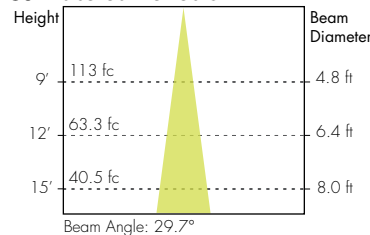

80° Smooth Reflector

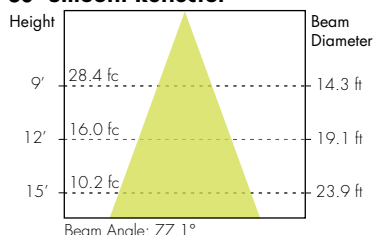

45° Faceted Reflector

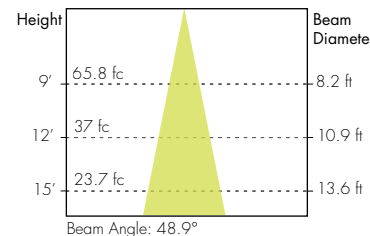

60° Faceted Reflector

