


## Features

- Full length seamless lenses range from 4 to 12 feet.
- This built to order, architecturally designed luminaire features Up AND Down light output.
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable.
- The subtle flared Vesta Suspended fixtures feature a symmetrical, high-performance frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty.

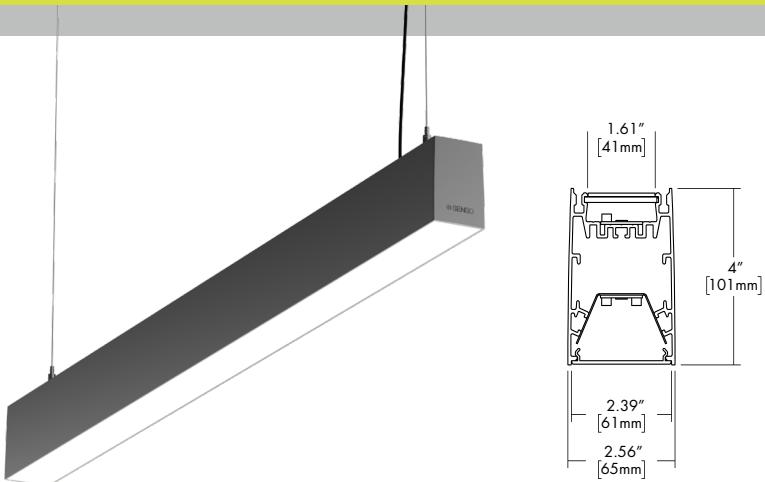

## Finish Options

White    Black    Silver



Made in Canada with Imported Parts

## Technical Information

OUTPUT OPTIONS		TW04	TW06	TW08
DOWN	<b>Lumen Output</b>	418 lm/ft	592 lm/ft	776 lm/ft
	<b>Average Power Consumption</b>	2.5 W/ft	3.5 W/ft	4.8 W/ft
	<b>Efficacy</b>	20 lm/W	21 lm/W	21 lm/W
UP	<b>Lumen Output</b>	418 lm/ft	592 lm/ft	776 lm/ft
	<b>Average Power Consumption</b>	2.5 W/ft	3.5 W/ft	4.8 W/ft
	<b>Efficacy</b>	20 lm/W	21 lm/W	21 lm/W

TM-30				
CCT	CRI	R <sub>f</sub>	R <sub>g</sub>	R <sub>9</sub>
2700K	91	90	96	59
6500K	93	87	97	73

## Ordering Code

Integral Driver Example: Fixture VSD-S\_UD-6FT-TW04-TW04-27K65K-F-F-WH-RDS-WH-AF5-CL-010S-CSMB

### Fixture

MODEL	LENGTH	OUTPUT DOWN <sup>1,2</sup>	OUTPUT UP <sup>1,2</sup>	CCT	LENS DOWN <sup>1</sup>	LENS UP <sup>1</sup>	FINISH
VSD-S - Vesta Dry, Suspended Up AND Down	4ft - 4 feet <sup>3</sup> 6ft - 6 feet 8ft - 8 feet 10ft - 10 feet 12ft - 12 feet XX - System <sup>4</sup>	TW04 - 418 lm/ft (4.8 W/ft) TW06 - 592 lm/ft (7.2 W/ft) TW08 - 776 lm/ft (9.6 W/ft)	TW04 - 418 lm/ft (4.8 W/ft) TW06 - 592 lm/ft (7.2 W/ft) TW08 - 776 lm/ft (9.6 W/ft)	27K65K - Tunable White, 2700K-6500K	F - Frosted Lens	F - Frosted Lens	Standard
							WH - White
							BK - Black
							SL - Silver

CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE/HEIGHT	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS
RDS - Round Slim USQS - Unified Square Slim URDS - Unified Round Slim	Standard WH - White BK - Black SL - Silver	AF5 AC + Feed Cable, 5ft long AF8 AC + Feed Cable, 8ft long AF10 AC + Feed Cable, 10ft long	Standard CL - Feed Cable Clear WH - Feed Cable White BK - Feed Cable Black	010S - 0-10V, 1% Dimming, 120/277V	NA - None CSMB - Casambi

1 - Must select OUTPUT and LENS for both DOWN and UP.

2 - Tunable White output numbers are representative of 4000K.

3 - TW04 Output is not available with 4ft Length.


4 - Customizable configurations available, contact factory (MOD only).

CONTACT FACTORY FOR MORE OPTIONS.

## Canopy


### RDS

Round Slim Canopy

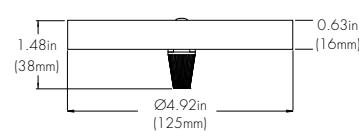


### URDS

Unified Round Slim



### USQS

Unified Square Slim



## Lens Down

### F

Frosted Lens



## Lens Up

### F

Frosted Lens




### BW

Batwing Lens (Only Lens Up)




## Cut Lengths

CODE	Fixture Length Longueur	Feet	2	4	6	8	10	12
A	22.5"							
B (4)	44.5"							
C (6)	66.5"							
D (8)	88.5"							
E (10)	110.5"							
F (12)	132.5"							

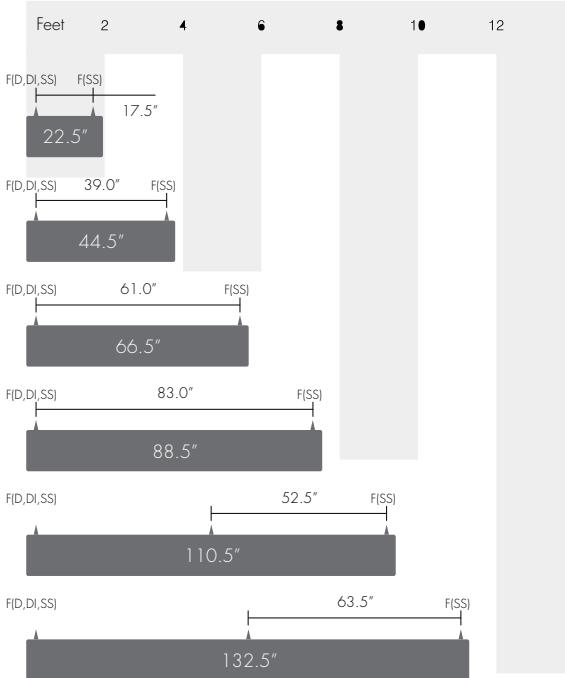

### Legend

- ▲ : Suspension Point
- F() : Feed Point
- D : Direct
- DI : Direct / Indirect
- SS : Separate Switching

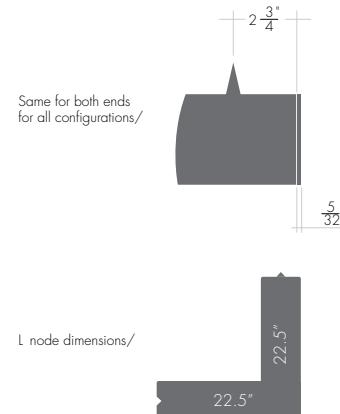

\*1 Not including end-caps. End-caps are an additional 5/32"

For custom lengths please call customer service. Cover plates will be added to each end to avoid dark spaces on lens.




Sensor adds 3.75" to standard vesta length

## Standard Finish

**BK**  
Black


**WH**  
White

**SL**  
Silver




## TM-30

### Tunable White 2700K



### Tunable White 6500K



## Photometry

### Tunable White Down

