



VESTA T-GRID

TUNABLE WHITE LINEAR SYSTEM



Features

- Full length seamless lenses range from 2 to 12 feet.
- Integrated drivers and controls make this fixture easy to install and widely applicable
- Designed to work with 9/16" or 15/16" T-Grid ceiling applications
- The Vesta Recessed line features a powerful light in a clean, recessed format while not sacrificing the symmetrical, high-performance frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty

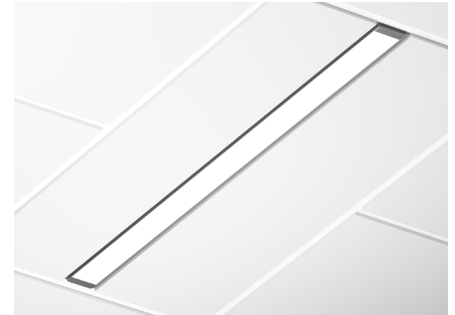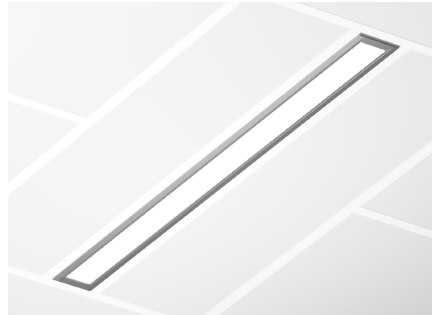

Finish Options

☐ White ☒ Black ☐ Silver

ROHS



Made in Canada
with Imported Parts

Technical Information

OUTPUT OPTIONS	TW04	TW06	TW08
Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
Efficacy	20 lm/W	21 lm/W	21 lm/W

CCT	CRI	TM-30		
		R _f	R _g	R ₉
2700K	91	90	96	59
6500K	93	87	97	73

Ordering Code

Integral Driver Example: Fixture VSD-TG-6ft-TW04-TW04-F-TB9-WH-010S-CSMB

Fixture

MODEL	LENGTH	OUTPUT DOWN ¹	CCT	LENS DOWN
-------	--------	--------------------------	-----	-----------

VSD-TG - Vesta Dry, T-Grid³
VSD-TT - 2-models TT-9, 15 separated⁴

4ft - 4 feet
6ft - 6 feet
8ft - 8 feet
10ft - 10 feet
12ft - 12 feet
XX - System^{1,3}

TW04 - 418 lm/ft (4.8 W/ft)²
TW06 - 592 lm/ft (7.2 W/ft)
TW08 - 776 lm/ft (9.6 W/ft)

TW04 - 418 lm/ft (4.8 W/ft)
TW06 - 592 lm/ft (7.2 W/ft)
TW08 - 776 lm/ft (9.6 W/ft)

F - Frosted Lens

MOUNTING	FINISH	DRIVER	DRIVER OPTIONS ⁶
----------	--------	--------	-----------------------------

TB9 - 9/16" Lay-in Grid³
TB15 - 15/16" Lay-in Grid³
TT9 - 9/16" Tegular Clip⁴
TT15 - 15/16" Tegular Clip⁴
TD9 - 9/16" Drop-in Grid³
TD15 - 15/16" Drop-in Grid³

WH - White
BK - Black
SL - Silver

010S - 0-10V, 1% Dimming, 120/277V
DALI - EddoLED, DALI protocol 2, DT-6, Log, 0.1% Dimming, 120/277V (Standard as LOG)⁸
DMX - EddoLED, DMX, 0.1% Dimming, 120V/277V


NA - None
CSMB - Casambi⁵

1 - Tunable White output numbers are at representative of 4000K
2 - TW04 Output is not available with 4ft length.
3 - VSD-TG must use TB or TD Mounting.
4 - VSD-TT must use TT Mounting.
5 - CSMB is only available with 010S/DALI drivers only.

6 - AWRN - Contact Manufacturer for Build Assistance - (MOD Only).
7 - Customizable configurations available, contact factory (MOD only).
8 - DALI driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALILIN


CONTACT FACTORY FOR MORE OPTIONS.

Dimensions

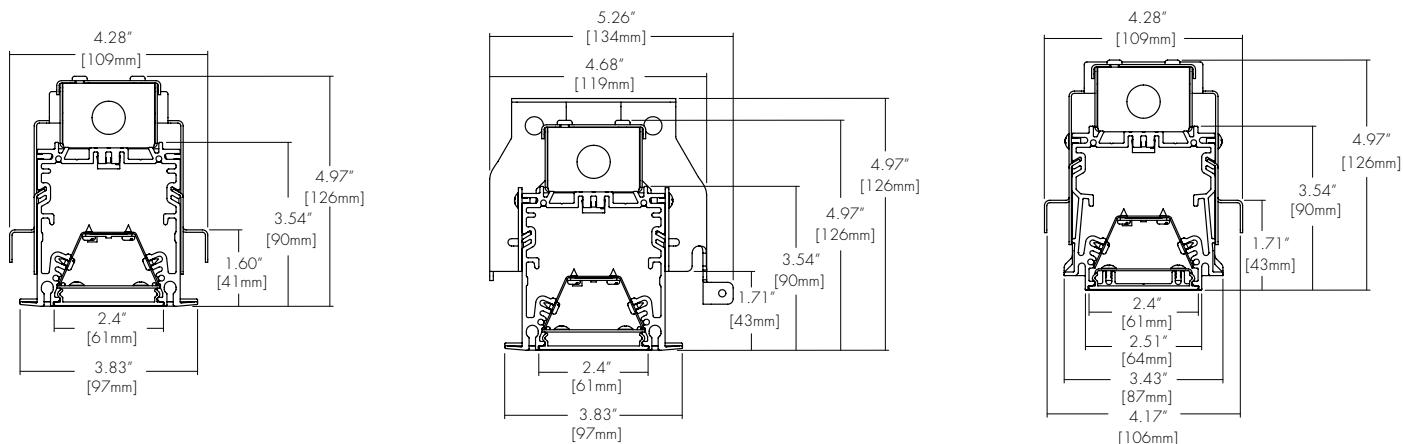


Mounting

TB9/TB15 Lay-in Grid

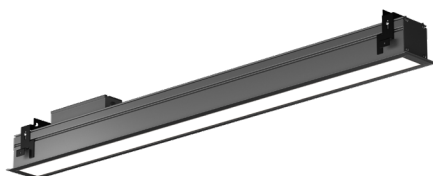

TD9/TD15 Drop-in Grid

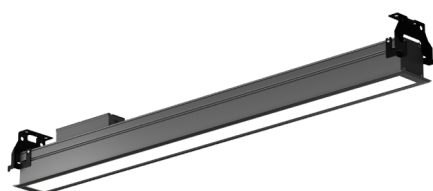


TT9/TT15 Tegular Clip




Lens

F Frosted Lens



Compatible with 9/16" - 15/16" grid



VESTA T-GRID

TUNABLE WHITE LINEAR SYSTEM




Standard Finish


BK
Black



WH
White




SL
Silver



TM-30

Tunable White 2700K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Tunable White 6500K

COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Photometry

Tunable White Down

