


Features

- Full length seamless lenses range from 4 to 12 feet.
- This built to order, architecturally designed luminaire features Up AND Down light output.
- Integrated drivers and controls make this fixture easy to install and widely applicable.
- The subtle flared Vesta Wall Mount fixtures feature a symmetrical, high-performance frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty.

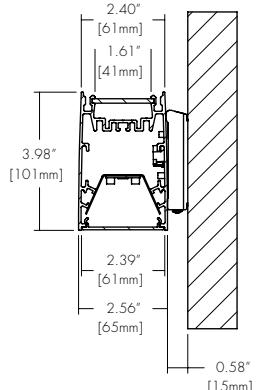

Finish Options

White Black Silver



Made in Canada
with Imported Parts

Technical Information

| OUTPUT OPTIONS | | TW04 | TW06 | TW08 |
|----------------|----------------------------------|-----------|-----------|-----------|
| DOWN | Lumen Output | 418 lm/ft | 592 lm/ft | 776 lm/ft |
| | Average Power Consumption | 2.5 W/ft | 3.5 W/ft | 4.8 W/ft |
| | Efficacy | 20 lm/W | 21 lm/W | 21 lm/W |
| UP | Lumen Output | 418 lm/ft | 592 lm/ft | 776 lm/ft |
| | Average Power Consumption | 2.5 W/ft | 3.5 W/ft | 4.8 W/ft |
| | Efficacy | 20 lm/W | 21 lm/W | 21 lm/W |

| TM-30 | | | | |
|-------|-----|----------------|----------------|----------------|
| CCT | CRI | R _f | R _g | R ₉ |
| 2700K | 91 | 90 | 96 | 59 |
| 6500K | 93 | 87 | 97 | 73 |

Ordering Code

Integral Driver Example: Fixture VSD-WM_UD-6FT-TW04-TW04-27K65K-F-F-WH-010S-CSMB

Fixture

| MODEL | LENGTH | OUTPUT DOWN ^{1,2} | OUTPUT UP ^{1,2} | CCT | LENS DOWN ¹ | LENS UP ¹ | FINISH |
|--------|--------|----------------------------|--------------------------|-----|------------------------|----------------------|--------|
| VSD-WM | - | - | - | - | - | - | - |

VSD-WM - Vesta Dry, Wall Mount UP AND Down

4ft- 4 feet
6ft- 6 feet
8ft- 8 feet
10ft- 10 feet
12ft- 12 feet
XX- System⁶

TW04- 418 lm/ft [4.8 W/ft]³

TW06- 592 lm/ft [7.2 W/ft]

TW08- 776 lm/ft [9.6 W/ft]

TW04- 418 lm/ft [4.8 W/ft]³

TW06- 592 lm/ft [7.2 W/ft]

TW08- 776 lm/ft [9.6 W/ft]

27K65K - Tunable White,
2700K-6500K

F-Frosted Lens

F-Frosted Lens

Standard
WH-White
BK-Black
SL-Silver

DRIVER

DRIVER OPTIONS

010S-010V, 1% Dimming, 120/277V

NA-None
CSMB-Casambi⁴
AWNR-Athena⁵

1 - Must select OUTPUT and LENS for both DOWN and UP.
2 - Tunable White output numbers are at representative of 4000K
3 - TW04 Output is not available with 4ft length.
4 - CSMB only available with 010S.
5 - AWNR sensor not available.

6 - Customizable configurations available, contact factory (MOD only).

CONTACT FACTORY FOR MORE OPTIONS.

Lens Down


F
Frosted Lens



AS
Asymmetric Lens



BL
Black Lens




Lens Up

F
Frosted Lens



AS
Asymmetric Lens




BW
Batwing Lens (Only Lens Up)




Cut Lengths

| CODE | Fixture Length Longueur | Feet | 2 | 4 | 6 | 8 | 10 | 12 |
|--------|----------------------------|------|---|---|---|---|----|----|
| A | 22.5" | | | | | | | |
| B (4) | 44.5" | | | | | | | |
| C (6) | 66.5" | | | | | | | |
| D (8) | 88.5" | | | | | | | |
| E (10) | 110.5" | | | | | | | |
| F (12) | 132.5" | | | | | | | |

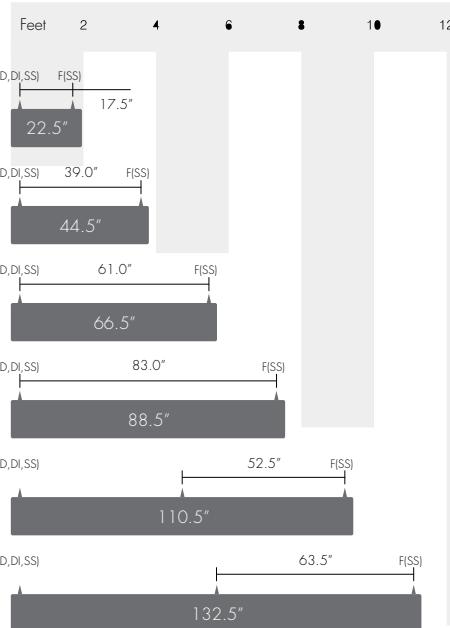

Legend

- ▲ : Suspension Point
- F() : Feed Point
- D : Direct
- DI : Direct / Indirect
- SS : Separate Switching

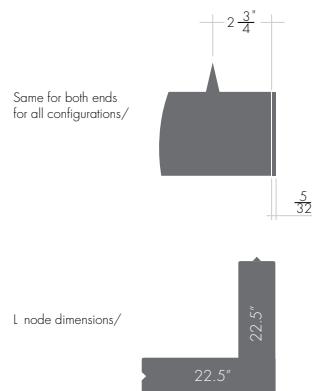


*1 Not including end-caps. End-caps are an additional 5/32"

For custom lengths please call customer service. Cover plates will be added to each end to avoid dark spaces on lens.


Sensor adds 3.75" to standard vesta length

Standard Finish

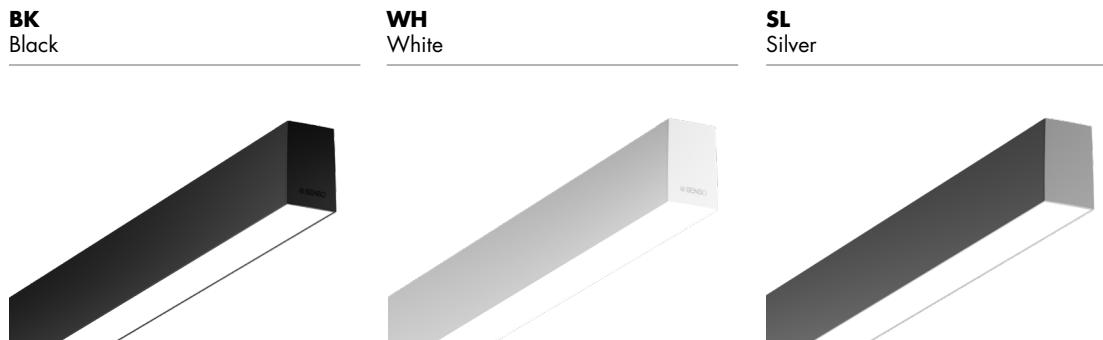


TM-30

Tunable White 2700K



Tunable White 6500K



Photometry

Tunable White Down

