


VESTA WET

RECESSED
TUNABLE WHITE LINEAR SYSTEM



Features

- Full length seamless lenses range from 4 to 8 feet.
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable.
- The Vesta Recessed line features a powerful light in a clean, recessed format while not sacrificing the symmetrical, high-performance WET RATED frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty.

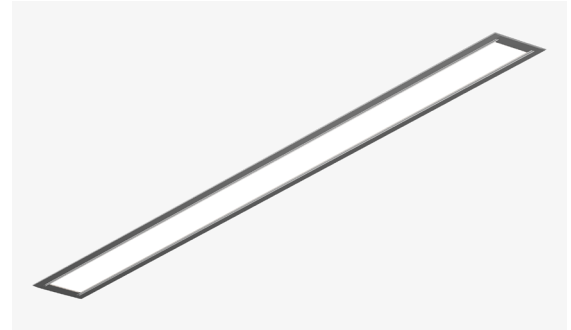

Finish Options

☐ White ☒ Black ☐ Silver

RoHS



Made in Canada
with Imported Parts



Technical Information

OUTPUT OPTIONS	TW04	TW06	TW08
Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
Efficacy	20 lm/W	21 lm/W	21 lm/W

CCT	CRI	TM-30		
		R _f	R _g	R ₉
2700K	91	90	96	59
6500K	93	87	97	73

Ordering Code

Integral Driver Example: Fixture VSD-R-6ft-TW04-27K65K-F-GS-WH-010S-CSMB

Fixture

MODEL	LENGTH	OUTPUT DOWN ²	CCT	LENS DOWN
VSD-R - Vesta Dry, Recessed	4ft - 4 feet 6ft - 6 feet 8ft - 8 feet XX - System ³	TW04 - 418 lm/ft (4.8 W/ft) ¹ TW06 - 592 lm/ft (7.2 W/ft) TW08 - 776 lm/ft (9.6 W/ft)	27K65K - Tunable White, 2700K-6500K	F - Frosted Lens


MOUNTING	FINISH	DRIVER	DRIVER OPTIONS
GS - Gypsum Surface Mounting Bracket	WH - White BK - Black SL - Silver	010S - 0-10V, 1% Dimming, 120/277V DALI - EldoLED, DALI protocol 2, DT6, Log, 0.1% Dimming, 120/277V (Standard as LOG) ⁶ DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V	NA - None CSMB - Casambi ³ AWNRR - Athena ⁴

1 - TW04 Output is not available with 4ft length.
2 - Tunable White output numbers are at representative of 4000K.
3 - CSMB with 010S/DALI drivers only.

4 - AWNR - Contact manufacture for build assistance - (MOD Only).
5 - Customizable configurations available, contact factory (MOD only).
6 - DALI driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALI LIN

CONTACT FACTORY FOR MORE OPTIONS.


Dimensions

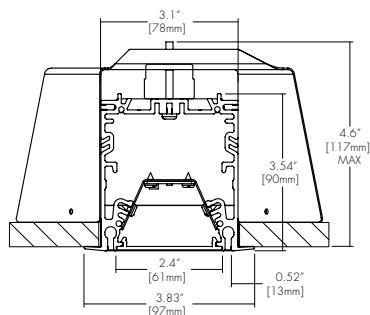


Lens

F

Frosted Lens



Cut Lengths


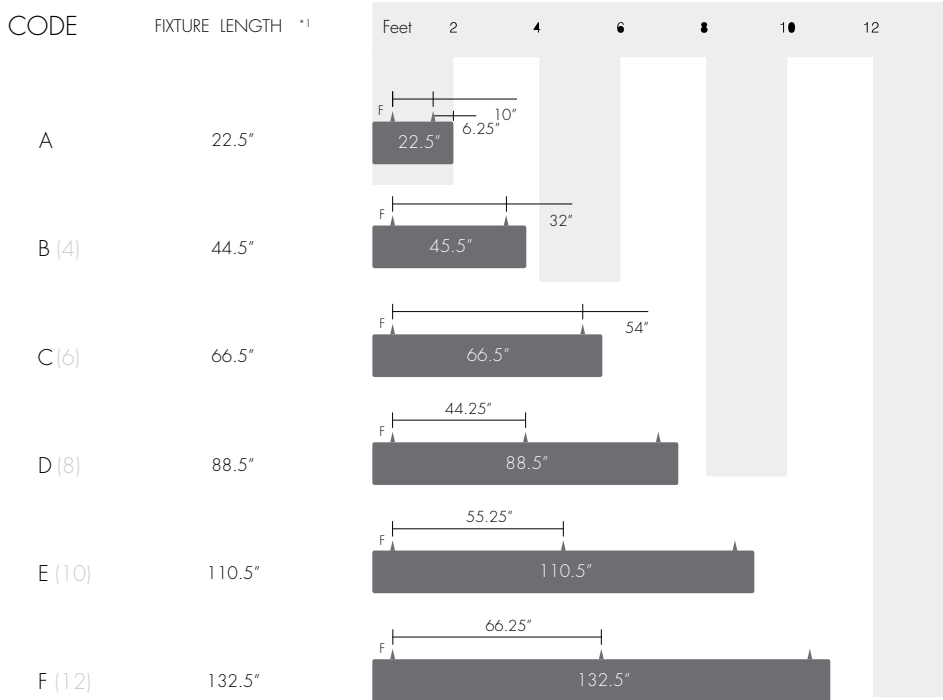


Standard Finish

BK
Black


WH
White

SL
Silver




TM-30

Tunable White 2700K



Tunable White 6500K



Photometry

Tunable White Down

