




Features

- Full length seamless lenses range from 4 to 8 feet.
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable
- Features a symmetrical, high-performance WET RATED frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty

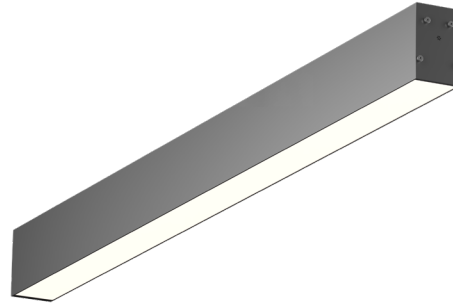

Finish Options

☐ White ☒ Black ☐ Silver

RoHS



Made in Canada
with Imported Parts



Technical Information

OUTPUT OPTIONS (Frosted Lens)	04	06	08	10
Lumen Output	400 lm/ft	566 lm/ft	843 lm/ft	1034 lm/ft
Average Power Consumption	3.8 W/ft	5.7 W/ft	9.4 W/ft	12.0 W/ft
Efficacy	104 lm/W	100 lm/W	90 lm/W	87 lm/W

OUTPUT OPTIONS (Asymmetric Lens)	04	06	08
Lumen Output	433 lm/ft	648 lm/ft	800 lm/ft
Average Power Consumption	8.1 W/ft	13.8 W/ft	17.3 W/ft
Efficacy	54 lm/W	47 lm/W	46 lm/W

CCT	Multiplier	CRI	TM-30		
			R _f	R _g	R ₉
2700K	0.92	93+	92	100	50+
3000K	0.97	93+	92	103	50+
3500K	1.00	93+	93	102	50+
4000K	1.07	93+	92	101	50+

Ordering Code

Integral Driver Example: Fixture VSD-SM-4FT-04-27K-F-CH-WH-0103-NA

Fixture

MODEL	LENGTH	OUTPUT	CCT	LENS	MOUNTING	BODY FINISH
VSW-SM - Vesta Wet, Surface Mount	4ft - 4 feet 6ft - 6 feet 8ft - 8 feet XX - System ⁹	04 - 400 lm/ft (3.8 W/ft) 06 - 566 lm/ft (5.7 W/ft) 08 - 843 lm/ft (9.4 W/ft) 10 - 1034 lm/ft (12 W/ft) ¹	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	F - Frosted Lens AS - Asymmetric Lens	SM - Surface Mount	Standard WH - White BK - Black SL - Silver
DRIVER		DRIVER OPTIONS ⁸				

010S - 0-10V, 1% Dimming, 120/277V
0103 - 0-10V, 1% Dimming, 347V Only²
010L - EldoLED, 0-10V, Linear, 0.1% Dimming, 120/277V²
010G - EldoLED, 0-10V, Log, 0.1% Dimming, 120/277V²
DALI - EldoLED, DALI protocol 2, DT-6, Log, 0.1% Dimming, 120/277V (Standard as LOG)^{2,10}
LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V^{2,3,5}
DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V^{2,5}

NA - None
EMG - Emergency Driver⁴
CSMB - Casambi
MNOD - PIR Motion Sensor, Occupancy,
Daylight Harvesting⁷

1 - Asymmetric Lens is not compatible with 10 output.
2 - Asymmetric Lens not compatible with 010L/010G/DALI/LUTE/DMX
3 - Output 08 not available for LUTE driver.
4 - EMG Battery Back-Up not available on Length 4ft or 6ft, illuminates 4ft or 6ft section based on lumen output.
5 - EMG not available with 0103/LUTE/DMX drivers.


6 - CSMB with 010S/010L/010G/DALI drivers only.
7 - MNOD contact manufacturer for build assistance - (MOD Only).
8 - AWRN contact manufacturer for build assistance - (MOD Only).
9 - Customizable configurations available, contact factory (MOD only).
10 - DALI driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALI LIN

CONTACT FACTORY FOR MORE OPTIONS.

Lens


F

Frosted Lens






AS

Asymmetric Lens




Cut Lengths

Vesta Wet Rated Surface Mount end cap will add 0.28" (7mm) per side to the total length.


CODE	FIXTURE LENGTH LONGUEUR	*1	Feet	4	6	8	10
A	44.5"						
B (6)	66.5"						
			56.5"				
C (8)	88.5"						

Standard Finish


BK
Black



WH
White




SL
Silver



TM-30

2700K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

3000K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

3500K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

4000K



COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Photometry

Frosted Lens

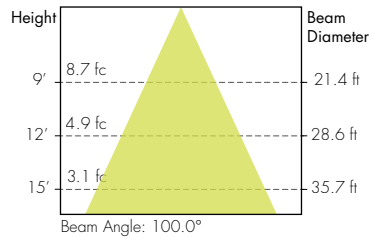

Asymmetric Lens

