


Features

- Full length seamless lenses range from 4 to 8 feet.
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable.
- Features a symmetrical, high-performance WET RATED frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty

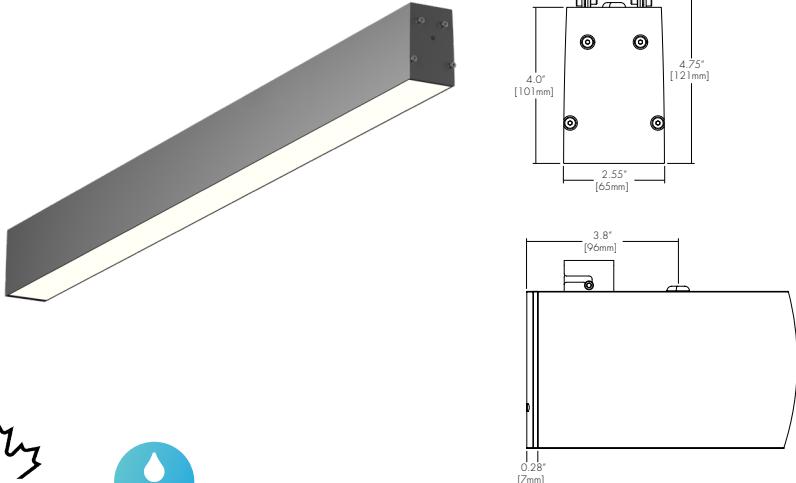

Finish Options

White Black Silver



Made in Canada
with Imported Parts



Technical Information

OUTPUT OPTIONS	TW04	TW06	TW08
Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
Efficacy	20 lm/W	21 lm/W	21 lm/W

CCT	TM-30			
	CRI	R _f	R _g	R _g
2700K	91	90	96	59
6500K	93	87	97	73

Ordering Code

Integral Driver Example: Fixture VSW-SM-6ft-TW06-27K65K-F-SM-WH-010S-CSMB

Fixture

MODEL	LENGTH	OUTPUT	CCT	LENS	MOUNTING	BODY FINISH
VSW-SM	-	-	-	-	-	-

VSW-SM - Vesta Wet, Surface Mount

4ft - 4 feet
6ft - 6 feet
8ft - 8 feet
XX - System⁷

TW04 - 418 lm/ft (4.8 W/ft)
TW06 - 592 lm/ft (7.2 W/ft)
TW08 - 776 lm/ft (9.6 W/ft)

27K65K - Tunable White, 2700K-6500K¹

F - Frosted Lens

SM - Surface Mount

Standard
WH - White
BK - Black
SL - Silver

DRIVER

DRIVER OPTIONS⁶

010S-0-10V, 1% Dimming, 120/277V³
DALI-EldoLED, DALI protocol 2, DT-6, Log, 0.1% Dimming, 120/277V (Standard as LOG)⁸
DMX-EldoLED, DMX, 0.1% Dimming, 120V/277V

NA - None
CSMB - Casambi⁴
MNOD - PIR Motion Sensor, Occupancy, Daylight Harvesting⁵

1 - Tunable White output numbers are at representative of 4000K.
2 - Tunable White at 4ft length, not available with Output TW04.
3 - 010S driver is only available with driver option CSMB.
4 - CSMB with 010S/DALI drivers only.


5 - MNOD contact manufacturer for build assistance - (MOD Only).
6 - AWNR contact manufacturer for build assistance - (MOD Only).
7 - Customizable configurations available, contact factory (MOD only).
8 - DALI driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALI LIN

CONTACT FACTORY FOR MORE OPTIONS.

Lens

F

Frosted Lens



Cut Lengths

Vesta Wet Rated Surface Mount end cap will add 0.28" (7mm) per side to the total length.


CODE	Fixture Length *1 Longueur	Feet	4	6	8	10
A	44.5"					
			45.5			
B (6)	66.5"					
			68.0"			
C (8)	88.5"					
			56.5"			
				90.5"		

Standard Finish


BK
Black



WH
White




SL
Silver




TM-30

Tunable White 2700K



Tunable White 6500K



Photometry

Tunable White Down

