


VESTA WET

SUSPENDED LINEAR SYSTEM



Features

- Full length seamless lenses range from 4 to 8 feet.
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable
- The subtle flared Vesta Suspended fixtures feature a symmetrical, high-performance VET RATED frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty

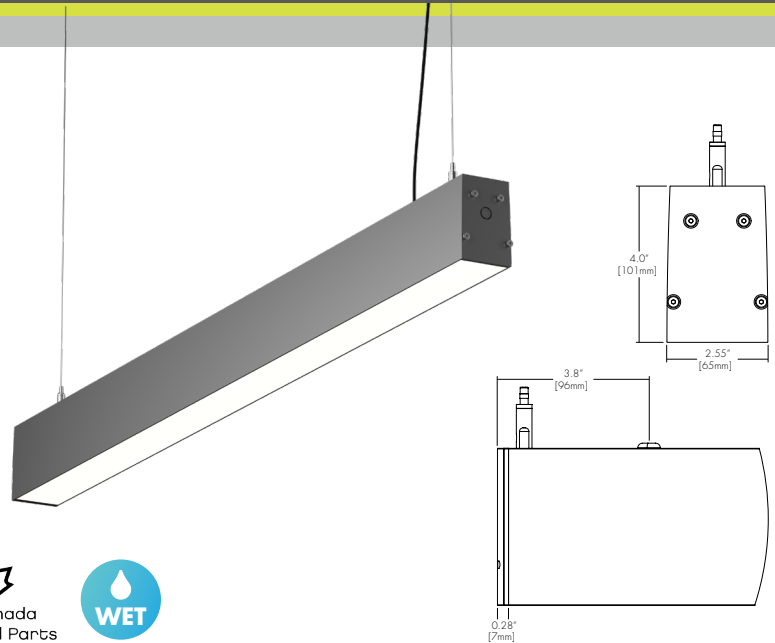

Finish Options

☐ White ☒ Black ☐ Silver

RoHS



Made in Canada
with Imported Parts



Technical Information

OUTPUT OPTIONS (Frosted Lens)	04	06	08	10
Lumen Output	400 lm/ft	566 lm/ft	843 lm/ft	1034 lm/ft
Average Power Consumption	3.8 W/ft	5.7 W/ft	9.4 W/ft	12.0 W/ft
Efficacy	104 lm/W	100 lm/W	90 lm/W	87 lm/W

OUTPUT OPTIONS (Asymmetric Lens)	04	06	08
Lumen Output	433 lm/ft	648 lm/ft	800 lm/ft
Average Power Consumption	8.1 W/ft	13.8 W/ft	17.3 W/ft
Efficacy	54 lm/W	47 lm/W	46 lm/W

CCT	Multiplier	CRI	TM-30		
			R _f	R _g	R ₉
2700K	0.92	93+	92	100	50+
3000K	0.97	93+	92	103	50+
3500K	1.00	93+	93	102	50+
4000K	1.07	93+	92	101	50+

Ordering Code

Integral Driver Example: Fixture VSW-S-6ft-06-35K-F-N-WH-NA-NA-AF5-WH-010S-NA

Fixture

MODEL	LENGTH	OUTPUT DOWN	CCT	LENS DOWN	FINISH
VSW-S - Vesta Wet, Suspended	4ft - 4 feet 6ft - 6 feet 8ft - 8 feet XX - System ⁶	04 - 400 lm/ft (3.8 W/ft) 06 - 566 lm/ft (5.7 W/ft) 08 - 843 lm/ft (9.4 W/ft) 10 - 1034 lm/ft (12 W/ft)	27K - 2700K 30K - 3000K 35K - 3500K 40K - 4000K	F - Frosted Lens AS - Asymmetric Lens ¹	Standard WH - White BK - Black SL - Silver

CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE/HEIGHT	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS
NA - None	NA - None	AF5 AC + Feed Cable, 5ft long AF8 AC + Feed Cable, 8ft long AF10 AC + Feed Cable, 10ft long	WH - Feed Cable White BK - Feed Cable Black	010S - 010V, 1% Dimming, 120V/277V ³ 0103 - 010V, 1% Dimming, 347V Only ⁴ 010L - EldoLED, 010V, linear, 0.1% Dimming, 120V/277V ^{2,3} 010G - EldoLED, 010V, log, 0.1% Dimming, 120V/277V ^{2,3} DALI - EldoLED, DALI protocol 2, DT-6, log, 0.1% Dimming, 120V/277V (Standard as LOG) ^{2,3,7} LUTE - Lutron Hilume Ecodigital, 1% Dimming, 120V/277V ^{2,4} DMX - EldoLED, DMX, 0.1% Dimming, 120V/277V ^{2,4}	NA - None EMG - Emergency Driver ⁵ CSMB - Casambi


1 - Asymmetric Lens not compatible with Output 10.
2 - Asymmetric Lens not compatible with 010L/010G/DALI/LUTE/DMX.
3 - CSMB with 010S/010L/010G/DALI drivers only.
4 - EMG not available with 0103/LUTE/DMX drivers.

5 - EMG Battery Back-Up not available on Length 4ft or 6ft, illuminates 4ft or 6ft section based on lumen output.
6 - Customizable configurations available, contact factory (MOD only).
7 - DALI driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALILIN


CONTACT FACTORY FOR MORE OPTIONS.

Lens

F
Frosted Lens



AS
Asymmetric Lens




Cut Lengths

Vesta Wet Rated Suspended end cap will add 0.55" (14mm),
0.28" (7mm) per side to the total length.


CODE	FIXTURE LENGTH LONGUEUR	*1	Feet	4	6	8	10
A	45.5"						
B (6)	68"						
C (8)	90.5"						

Standard Finish


BK
Black



WH
White




SL
Silver



TM-30

2700K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

3000K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

3500K


COLOR VECTOR GRAPHIC



— Reference Source — Test Source

4000K



COLOR VECTOR GRAPHIC



— Reference Source — Test Source

Photometry

Frosted Lens

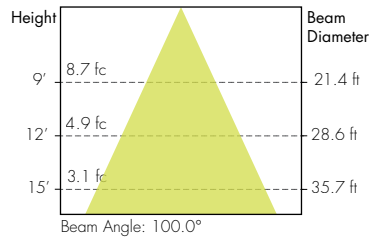

Asymmetric Lens

