


Features

- Full length seamless lenses range from 4 to 8 feet.
- This built to order, architecturally designed luminaire features Up AND Down light output
- Not limited to straight runs, available in L nodes, providing freedom to create seamless configurations, available in 22.5in increments.
- Integrated drivers and controls make this fixture easy to install and widely applicable
- The subtle flared Vesta Suspended fixtures feature a symmetrical, high-performance WET RATED frosted lens which illuminates the surface evenly with no shadows or dark spots.
- Five Year Warranty

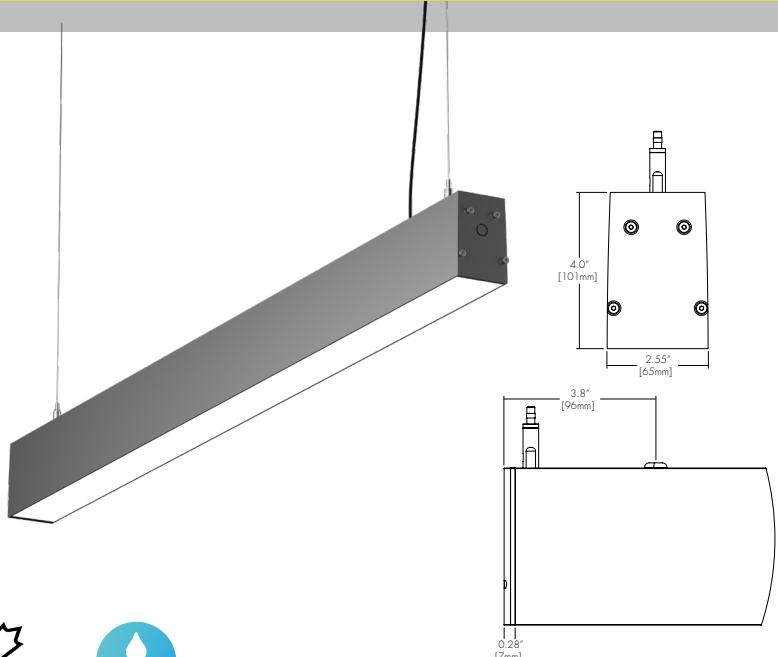

Finish Options

White Black Silver



Made in Canada
with Imported Parts



Technical Information

OUTPUT OPTIONS	TW04	TW06	TW08
Lumen Output	418 lm/ft	592 lm/ft	776 lm/ft
Average Power Consumption	2.5 W/ft	3.5 W/ft	4.8 W/ft
Efficacy	20 lm/W	21 lm/W	21 lm/W

TM-30				
CCT	CRI	R _f	R _g	R ₉
2700K	91	90	96	59
6500K	93	87	97	73

Ordering Code

Integral Driver Example: Fixture VSW-S-6ft-TW06-27K65K-F-00-WH-NA-NA-AF5-WH-010S-CSMB

Fixture

MODEL	LENGTH	OUTPUT DOWN ¹	CCT	LENS DOWN	FINISH
VSW-S-Vesta Wet, Suspended	4ft-4 feet 6ft-6 feet 8ft-8 feet XX-System ⁴	TW04-418 lm/ft (4.8 W/ft) TW06-592 lm/ft (7.2 W/ft) TW08-776 lm/ft (9.6 W/ft)	27K65K-Tunable White, 2700K-6500K	F-Frosted Lens	Standard WH - White BK - Black SL - Silver

CANOPY/ HOUSING	CANOPY FINISH	SUSPENSION TYPE/HEIGHT	SUSPENSION FINISH	DRIVER	DRIVER OPTIONS
NA-None	NA-None	AF5 - AC + Feed Cable, 5ft long AF8 - AC + Feed Cable, 8ft long AT10 - AC + Feed Cable, 10ft long	WH-Feed Cable White BK-Feed Cable Black	010S-0-10V, 1% Dimming, 120/277V DALI-EldoLED, DALI protocol 2, DT-6, Log, 0.1% Dimming, 120/277V (Standard as LOG) ³ DMX-EldoLED, DMX, 0.1% Dimming, 120V/277V	NA-None CSMB-Casambi ³

1 - Tunable White output numbers are at representative of 4000K.
2 - TW04 Output is not available with 4ft length.

3 - CSMB is only available with 010S/DALI drivers.

4 - Customizable configurations available, contact factory (MOD only).

5 - DALI driver options use logarithmic dimming curve as standard. For LINEAR dimming curve, add "LIN" after the dimming code, i.e. DALI LIN

CONTACT FACTORY FOR MORE OPTIONS.

Lens

F
Frosted Lens



AS
Asymmetric Lens



Cut Lengths

Vesta Wet Rated Suspended end cap will add 0.55" (14mm),
0.28" (7mm) per side to the total length.


CODE	Fixture Length *1 Longueur	Feet			
		4	6	8	10
A	45.5"	45.5"	44 $\frac{5}{32}$ "		
B (6)	68"	68"		66 $\frac{21}{32}$ "	
C (8)	90.5"		90.5"		89 $\frac{5}{32}$ "

Standard Finish

BK
Black



WH
White




SL
Silver




TM-30

Tunable White 2700K



Tunable White 6500K



Photometry

Tunable White Down

