


Features

- 24VDC Class 2 fixtures made to order up to 120".
- Class 2 listed for damp locations
- Proprietary strong bond solder method handles up to 50 lbs of pull force on wire leads and connectors
- Vibrant Color options offer premium color quality with R9 values up to 98
- High Efficacy options offer best in class output and efficacy at 740 lm/ft and up to 105 lm/W
- Average Life (L70): 50,000hrs
- 7 year warranty



Finish Options (see page 2 for additional information)

Base	Silver Anodized		
Powder Coat	Black	Bronze	White
Premium	Matte Black	Warm Nickel	Aged Brass
	Polished Gold	Chrome	

Technical Information

TYPE	Vibrant Color VC72					
OUTPUT OPTIONS	**VC72VLO**	**VC72LO**	**VC72SO**	**VC72MO**	**VC72HO**	**VC72VHO**
Lumens Output (3000K) (with a Frosted Lens)	83 lm/ft	212 lm/ft	283 lm/ft	373 lm/ft	451 lm/ft	601 lm/ft
Average Power Consumption (for a 4' section)	1.1 W/ft	2.8 W/ft	3.7 W/ft	4.9 W/ft	5.9 W/ft	7.9 W/ft
Efficacy	75 lm/W	76 lm/W	76 lm/W	76 lm/W	76 lm/W	76 lm/W
Max Run Length (in series)	56.9 ft	32 ft	28 ft	24 ft	21 ft	18 ft
Ambient Operating Temperature Range*	-4°F – 122°F (-20°C – 50°C)					

*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

Vibrant Color (VC72)

CCT	Multiplier (ref. - 30K)	TM-30 CRI	TM-30 R_f	TM-30 R_g	TM-30 R_9
1800K	0.50	95	94	99	86
2200K	0.66	96	94	101	95
2400K	0.90	98	96	101	91
2700K	0.93	98	96	102	93
3000K	1.00	97	94	104	99
3500K	1.04	96	94	105	97
4100K	1.05	97	95	104	96

TYPE	High Efficacy HE64					
OUTPUT OPTIONS	**HE64VLO**	**HE64LO**	**HE64SO**	**HE64MO**	**HE64HO**	**HE64VHO**
Lumens Output (3000K) (with a Frosted Lens)	92 lm/ft	199 lm/ft	286 lm/ft	380 lm/ft	540 lm/ft	740 lm/ft
Average Power Consumption (for a 4' section)	1 W/ ft	1.9 W/ ft	2.9 W/ ft	3.8 W/ ft	5.6 W/ ft	7.1 W/ ft
Efficacy	92 lm/W	105 lm/W	99 lm/W	100 lm/W	96 lm/W	104 lm/W
Max Run Length (in series)	90 ft	55 ft	34.9 ft	26 ft	17 ft	13 ft
Ambient Operating Temperature Range*	-4°F – 122°F (-20°C – 50°C)					

*Ambient Operating Temperature Range to maintain L70 of 50k+ hours in normal mounting conditions for the fixture. Exceeding Ambient Operating Temperature Range may result in decreased life/output. Consult Technical Support for specific inquiries.

High Efficacy (HE64)

CCT	Multiplier (ref. - 30K)	TM-30 CRI	TM-30 R_f	TM-30 R_g	TM-30 R_9
2200K	0.74	94	91	96	65
2400K	0.87	94	92	97	56
2700K	0.97	94	92	100	57
3000K	1.00	93	91	99	54
3500K	1.01	95	91	99	62
4000K	1.04	95	91	99	68

Ordering Code

MODEL - LENGTH[1] - OUTPUT[2] - CCT - LENS - FINISH[3] - LEFT END CAP - RIGHT END CAP - POWER FEED LEFT END[5,6] - POWER FEED RIGHT END[5,6]

MODEL
- WP - Wall Plus

LENGTH[1]
- 8"–120" 1" increments
- 8"–120" 2" increments

OUTPUT[2]
- VC72VLO - Very Low
- VC72LO - Low
- VC72SO - Standard
- VC72MO - Medium
- VC72HO - High
- VC72VHO - Very High
- HE64VLO - Very Low
- HE64LO - Low
- HE64SO - Standard
- HE64MO - Medium
- HE64HO - High
- HE64VHO - Very High

CCT
- 18K - 1800K
- 22K - 2200K
- 24K - 2400K
- 27K - 2700K
- 30K - 3000K
- 35K - 3500K
- 41K - 4100K
- 22K - 2200K
- 24K - 2400K
- 27K - 2700K
- 30K - 3000K
- 35K - 3500K
- 40K - 4000K

LENS
- F - Frosted

FINISH[3]

BASE
- SA - Silver Anodized

POWDER COAT
- BK - Black
- BZ - Bronze
- WH - White

PREMIUM
- MBK - Matte Black
- WN - Warm Nickel
- AB - Aged Brass
- PG - Polished Gold[4]
- CH - Chrome[4]

LEFT END CAP
- LE - Endcap Left End
- LN - No Endcap Left End

RIGHT END CAP
- RE - Endcap Right End
- RN - No Endcap Right End

POWER FEED LEFT END[5,6]


JUNCTION BOX
- LJB - Junction Box Left
- LNPF - No Power Feed


POWER FEED RIGHT END[5,6]

JUNCTION BOX
- RNPF - No Power Feed
- RJB - Junction Box Right

1 - Custom lengths and increments are available, please consult Inside Sales with specific request.
2 - Title 24 JA8 achievable depending on Output, CCT, and Lens selections. See multiplier charts to calculate specific efficacies.
3 - Non Base finishes may have extended lead times. Custom RALs are available, please consult Inside Sales with specific request.
4 - Polished Gold finishes and Chrome finishes have a maximum fixture length of 96"
5 - NOTE: Cannot pair LJB-RJB together. Only one power feed per fixture/section on Wall Plus
6 - Junction Box comes with 24" plenum rated wire.

Product Dimensions

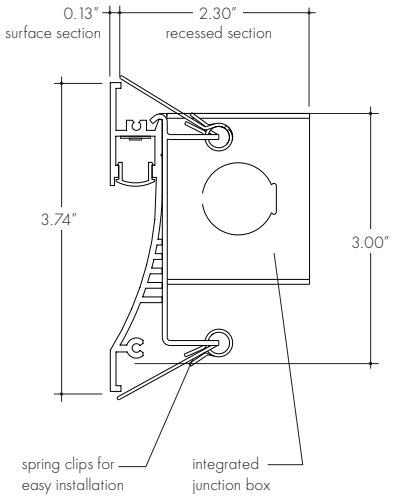

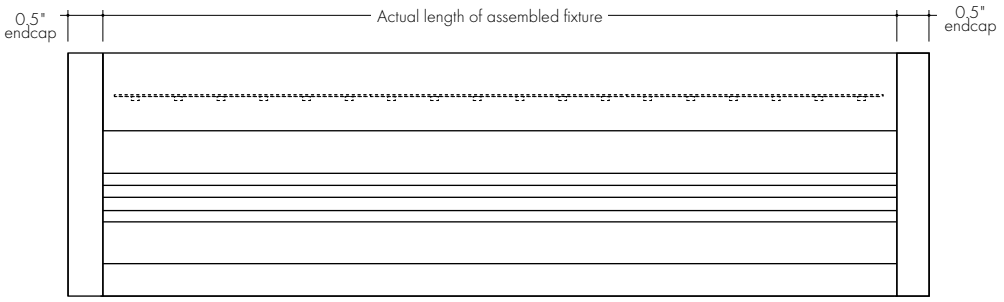

Finish Options

- Finish options are available in a wide variety, allowing for complete customization of style and aesthetic.
- Non Base finishes may have extended lead times.
- Polished Gold and Chrome finishes have a maximum fixture length of 96".
- Custom RALs are available, please consult Inside Sales with specific request.

Silver Anodized
Base



Silver Anodized is a soft silver with a clear finish.

Black
Powder Coat




Black is a true deep black with a glossy finish.

Bronze
Powder Coat



Bronze is a rich, dark brown with a satin finish.

White
Powder Coat




White is a polar bright white and field paintable.

Matte Black
Premium




Matte Black is a dark, pitch-black with a soft flat finish.

Warm Nickel
Premium



Warm Nickel is a soft, silvery smoke with warm tones and a satin finish.

Aged Brass
Premium




Aged Brass is a deep brown shade with slightly golden undertones.

Polished Gold
Premium




Polished Gold is bright and radiant for a brilliant finish.

Chrome
Premium




Chrome is a highly reflective silver polish.


Sample Layout of Power Feed (Backside of Wall Plus)

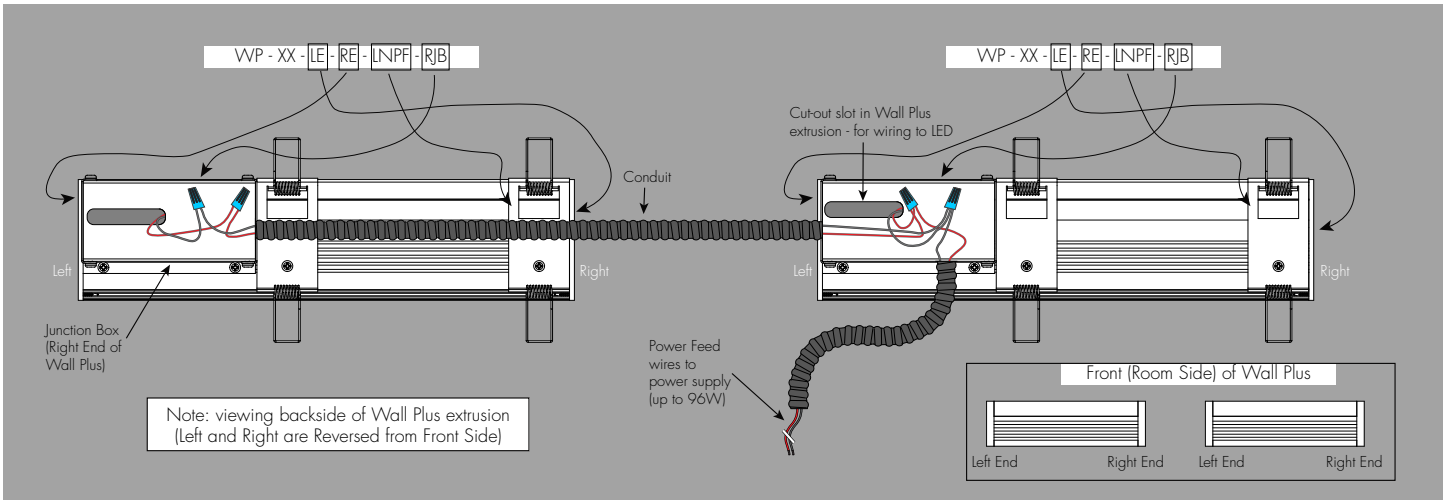

Sample Layout of Power Feed (Backside of Wall Plus)

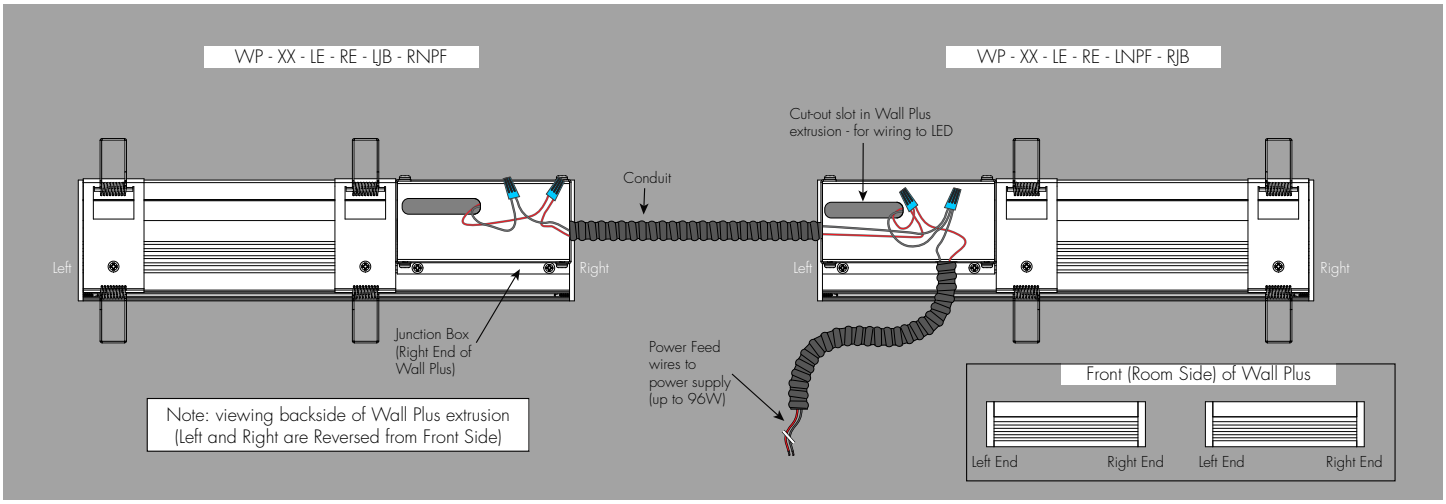


Sample Layout of Power Feed (Backside of Wall Plus)

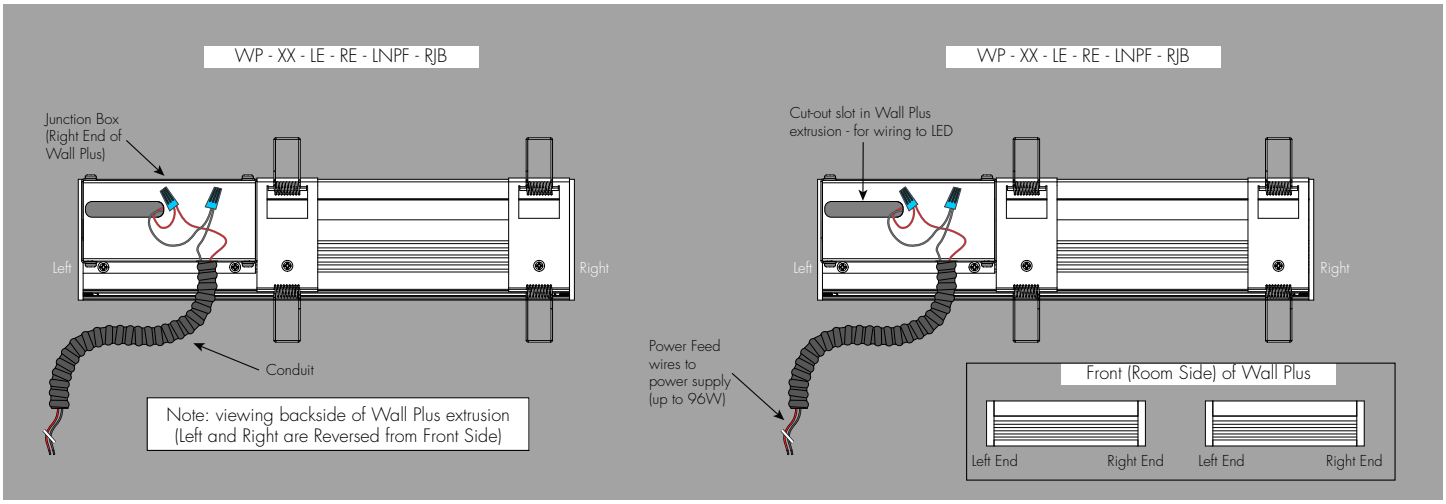

Light Transmission and Dotting

	Lens/Accessory			
Output Options	**Frosted Lens**			
Dimming Level	100%	50%	10%	1%
VC72VLO	ND	ND	ND	SD
VC72LO	ND	ND	ND	SD
VC72SO	ND	ND	ND	SD
VC72MO	ND	ND	ND	SD
VC72HO	ND	ND	ND	SD
VC72VHO	ND	ND	ND	SD
HE64VLO	ND	ND	SD	SD
HE64LO	ND	ND	SD	SD
HE64SO	ND	ND	SD	SD
HE64MO	ND	ND	SD	SD
HE64HO	ND	ND	SD	SD
HE64VHO	ND	ND	SD	SD
Transmission Percentage	100%			



CD - Clear Dotting

SD - Slight Dotting

ND - No Dotting


Use complete Dotting Chart Tool online for more dotting information

I'm also click-able

Photometry


WP-48-VC72VHO-30K-F

Wall Plus, 4ft, VHO, 3000K, Frosted Lens

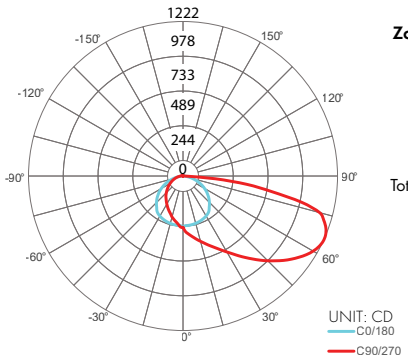

Zonal Lumen Summary 3000K

	Zone	Lumen	% Fixture
	0-30	87	14%
	0-40	154	26%
	0-60	346	58%
	0-90	595	99%
Total	0-180	601	100%



Power Consumption

Please visit the link/QR code below to access the Luminii Power Consumption Chart tool on our website.

There you will be able to select your fixture, ouput, and desired power feed to get a full power consumption table.

I'm also click-able

Desired Nominal Length: _____

Desired Output: _____

Desired CCT: _____

Voltage Drop Calculator

The below chart assumes nominal voltage of 24 Volts and a Voltage Drop Allowance of 3% through the wire

Wattage [W]	Maximum Wire Length From Power Supply to Start of Run [ft]						
	12 AWG	14 AWG	16 AWG	18 AWG	20 AWG	22 AWG	24 AWG
5	1088.2	684.4	430.3	270.6	170.2	107.1	67.3
10	544.1	342.2	215.1	135.3	85.1	53.5	33.7
15	362.7	228.1	143.4	90.2	56.7	35.7	22.4
20	272.0	171.1	107.6	67.7	42.6	26.8	16.8
25	217.6	136.9	86.1	54.1	34.0	21.4	13.5
30	181.4	114.1	71.7	45.1	28.4	17.8	11.2
35	155.5	97.8	61.5	38.7	24.3	15.3	9.6
40	136.0	85.5	53.8	33.8	21.3	13.4	8.4
45	120.9	76.0	47.8	30.1	18.9	11.9	7.5
50	108.8	68.4	43.0	27.1	17.0	10.7	6.7
55	98.9	62.2	39.1	24.6	15.5	9.7	6.1
60	90.7	57.0	35.9	22.6	14.2	8.9	5.6
65	83.7	52.6	33.1	20.8	13.1	8.2	5.2
70	77.7	48.9	30.7	19.3	12.2	7.6	4.8
75	72.5	45.6	28.7	18.0	11.3	7.1	4.5
80	68.0	42.8	26.9	16.9	10.6	6.7	4.2
85	64.0	40.3	25.3	15.9	10.0	6.3	4.0
90	60.5	38.0	23.9	15.0	9.5	5.9	3.7
96	56.7	35.6	22.4	14.1	8.9	5.6	3.5

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code - Universal Dimming Power Supplies 0.1% 120VAC - 277VAC


MODEL		INPUT CONTROL		WATTAGE		OUTPUT
	–		–		–	
PS - Power Supply, 120-277VAC		UNI - 0-10V Dimming (0.1%), Phase Dimming (0.1%)		30 - 30 Watts 60 - 60 Watts 96 - 96 Watts 3x96 - 3x96 Watts		24 - 24 VDC

Compatibility: View a complete list of compatible dimmers on the PS-UNI product page.


0-10V - 0.1% dimming
MLV/ELV/TRIAC - 0.1% dimming, consult dimming compatibility chart

MODELS	PS-UNI-30W	PS-UNI-60W	PS-UNI-96W	PS-UNI-3X96W
Length	6.50″	7.40″	8.66"	11.85"
Width	3.73″	3.73″	3.73"	4.32"
Depth	1.61″	1.61″	1.61"	1.81"

PS-UNI-30/60/96

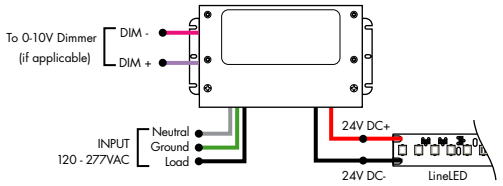

PS-UNI-3X96

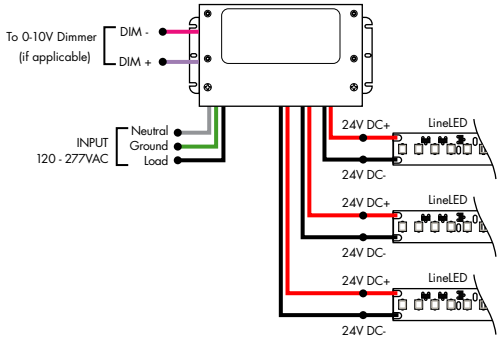


For use with Static White


Ordering Code - 0-10V Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL		INPUT CONTROL		ENVIRONMENT		WATTAGE		OUTPUT
	-		-		-		-	
PS - Power Supply, 120-277VAC		010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic		D - Dry		96 - 96 Watts 3x96 - 3x96 Watts		24 - 24 VDC

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.45"

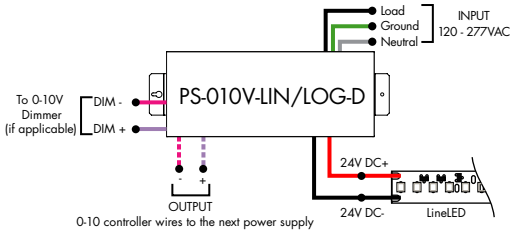

PS-010V-LIN/LOG-D-3X96

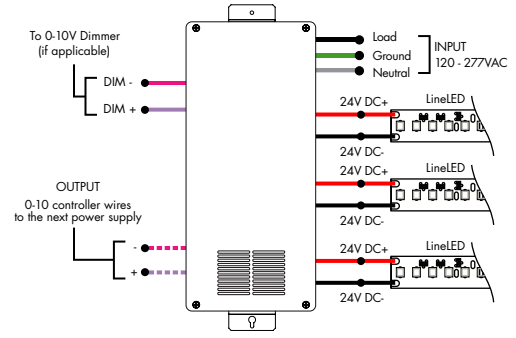


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White

Ordering Code - Athena 0-10V LED Driver

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT	FEATURE
PS - Power Supply, 120-277VAC	010V-LIN - 0-10V Dimming (0.1%), Linear 010V-LOG - 0-10V Dimming (0.1%), Logarithmic	D - Dry	96 - 96 Watts	24 - 24 VDC	AWNR - Athena

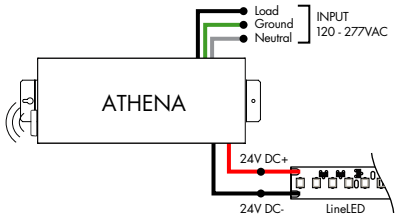


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

For use with Static White

Ordering Code - DALI 2 Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI2-DT6 - DALI2 DT6 (0.1%)	D - Dry	96 - 96 Watts	24 - 24 VDC

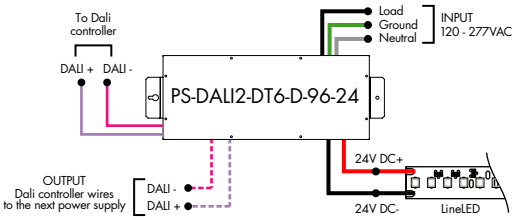


Model	96W
Length	14.40"
Width	5.20"
Depth	2.60"


For use with Static White

Ordering Code - DALI Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS - Power Supply, 120-277VAC	DALI - DALI (0.1%)	D - Dry	96 - 96 Watts 3x96 - 3x96 Watts	24 - 24 VDC

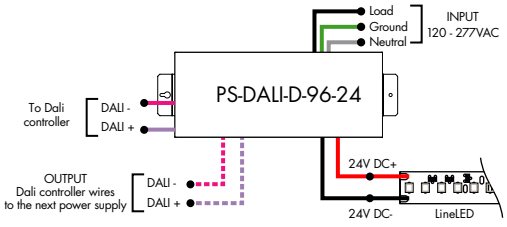

PS-DALI-D-3X96-24

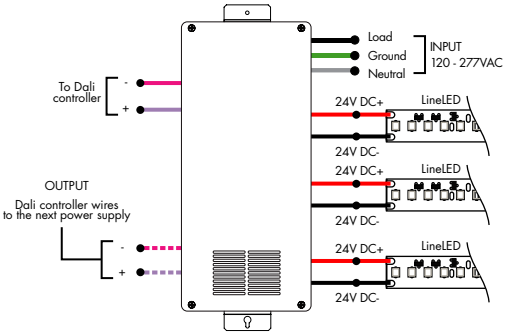

Model	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"


Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

For use with Static White


Ordering Code - DMX Dimming Power Supplies 0.1% 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	DMX-DMX (0.1%)	D-Dry	96-96 Watts 3x96-3x96 Watts	24-24 VDC

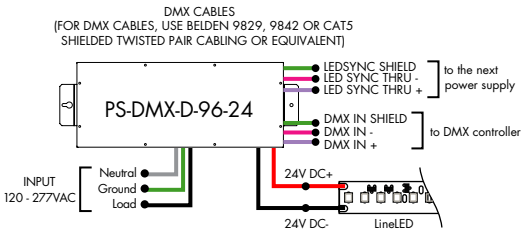

MODELS	96W	3X96
Length	14.40"	15.00"
Width	5.20"	6.62"
Depth	2.60"	4.56"


ZONAL CONTROL POWER SUPPLIES.
CONTROL MULTIPLE TAPES/ZONES USING DMX CHANNELS.

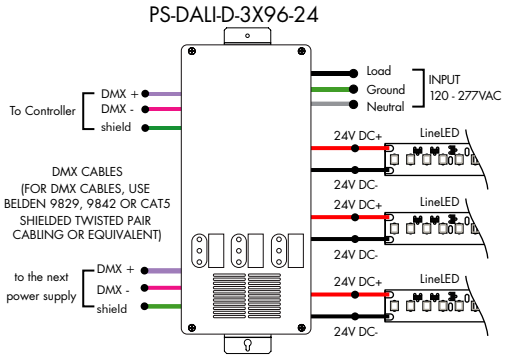

For use with Static White

Ordering Code - Non-Dimming Power Supply, 120VAC - 277VAC

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS-Power Supply, 120-277VAC	ND-Non Dimming	D-Dry	96-96 Watts	24-24 VDC

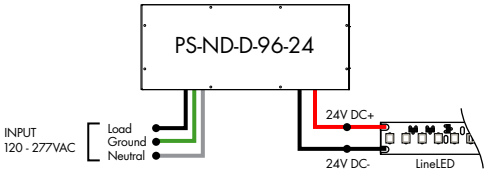


MODELS	96W
Length	14.40"
Width	5.20"
Depth	2.60"

For use with Static White

Ordering Code - In-Ground Power Supplies

MODEL	INPUT CONTROL	ENVIRONMENT	WATTAGE	OUTPUT
PS120-Power Supply, 120VAC PS240-Power Supply, 240VAC PS277-Power Supply, 277VAC	ELV-ELV Dimming (1%)	IG-In Ground	2X96-2X96 Watts	24-24 VDC

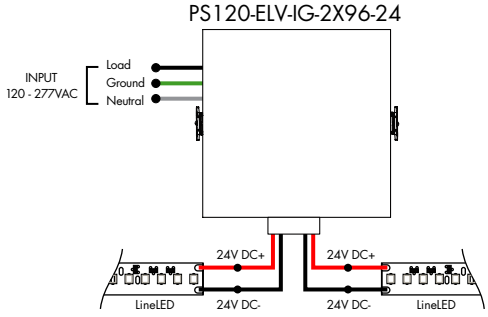

MODELS	2X96W
Length	8.40"
Width	8.30"
Depth	8.10"

Power Supplies

See Power Supply instructions and spec sheet for wiring information. For a complete list of compatible dimmers, see Compatible Dimming Chart on the Resources page.

LUTRON®

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 1%


MODEL

L3DA4U1UKL-CV240

Hi-lume™ 1% EcoSystem Voltage LED driver 40W max

MODELS	L3DA4U1UKL-CV240
Length	4.98"
Width	4.00"
Depth	2.62"

L3DA4U1UKL-CV240

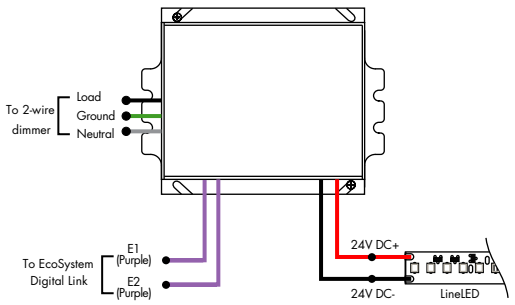

LUTRON®

Luminii is a Lutron OEM Advantage Partner

Lutron Power Supplies 0.1%

MODEL

L3D0-96W24V-U

Hi-lume™ 0.1% EcoSystem Voltage LED Driver with Soft-On, Fade-to-Black™ 96W max

MODELS	L3D0
Length	10.50"
Width	5.50"
Depth	2.00"

