



Features

- 120V AC fixtures made to order up to 48". Fixtures can be linked up to 10 fixtures joined together
- Available in sections of 12", 24", 36" & 48"
- Suitable for cove lighting, architectural accents, under or above cabinets and many other applications.
- Provides constant illumination levels from the beginning to the end of the runs

Finish Options

White







Technical information

TYPE	EL
OUTPUT OPTIONS	3000K
Max Run Joins	10
Dimensions	0.96"W x 1.20" H
Operating Voltage	120 VAC

POWER CONSUMPTION		
Section Length	Wattage	lm/ft
12"	3.8W	318 lm/ft
24"	7.8W	318 lm/ft
36"	11.6W	318 lm/ft
48"	16W	318 lm/ft

CCT	Multiplier (reference - 3000K)	CRI
2700K	0.81	98
3000K	1.00	91
3500K	0.98	95

Product Dimensions

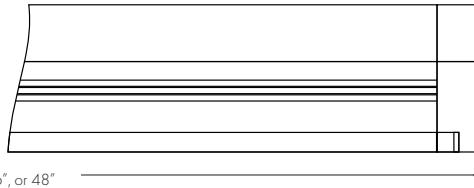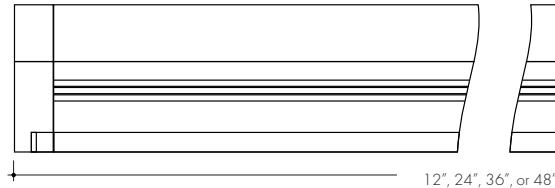

EL with Mounting Clip

Ordering Code

MODEL	VOLTAGE	LENGTH ¹	CCT	DIMMING
EL-Easy-Link	120V-120VAC	12-11.5" 24-23.75" 36-35.5" 48-47.25"	27K-2700K 30K-3000K 35K-3500K	D-Dimming (Triac)

1 - Only 24, 36, and 48 length options are Title 24 JA8 Compliant.

Occupancy Sensor



Sold Separately.

EL-OSSB-WH


Occupancy sensor/switch
(splice box)

EL-OSSB-PC-WH


Occupancy sensor/switch
(used with power cord accessory)



SENSOR SIDE VIEW

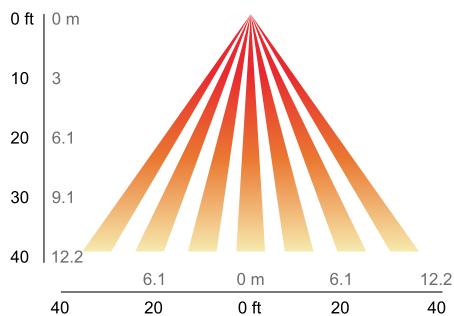

SENSOR TOP VIEW

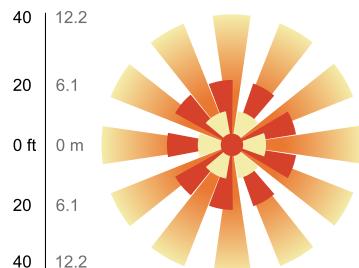

Energy Management
Equipment Accessory

1. Optimized full coverage pattern for 10 – 40 ft. (3.1 – 12 m)
2. Reliable detection of large motion (e.g. pedestrian walking traffic) up to 30 ft. (9.1 m) mounting height
3. Reliable detection of extra-large motion (e.g. forklift traffic) up to 40 ft. (12 m) mounting height

FEATURES


- Occupancy Time Delay
- Test Mode & 100 hr Burn-in
- Minimum One Time
- Lamp information

Accessories

Sold Separately.

JC-XX


Jumper cable



XX	Length
6	5.9"
12	11.8"
24	23.6"


PC-72

72" Power Cord




EL-SB-WH

On/off switch (splice box)



EL-SB-PC-WH

On/off switch
(used with power cord accessory)



Sample Layout

